



Industrial piston compressors

0.7-60 hp / 0.5-44.7 kW



Industrial piston compressors

0.7-60 hp / 0.5-44.7 kW

Low-pressure piston compressors

LT & LF 10 series

If you are in the market for an industrial compressor up to 10 bar, the oil-lubricated LT and oil-free LF series tick all the boxes, from superior reliability, high air quality to low cost of ownership. Choose from different power (2-10 hp) and pressure (2-10 bar) models to meet your exact needs. Block, power pack and full feature versions, base or tank-mounted, and a range of options are available for further customization.

Premium reliability

- A unique, robust design and quality materials ensure an extended product life.
- The fan designed for optimal cooling of the air flow also balances the compressor for reduced vibration.
- Patented stainless steel inlet/outlet pump valves.
- Long lifetime of 20,000 hours for oil-lubricated, 16,000 hours for oil-free units.
- Extremely low maintenance costs.

Low running costs

- Use of highly durable components for improved performance.
- Start-stop system instead of load-unload.

Easy maintenance

- All components and service points are easily accessible.

Compact

The LT and LF 10 compressor block is directly coupled to the motor and is built with lightweight materials. This provides excellent cooling and smooth integration in small spaces.



OIL-FREE AIR

Clean compressed air is a prerequisite for many critical manufacturing processes. Over the past sixty years, Atlas Copco has pioneered the development of oil-free air technology. We even became the first to achieve ISO 8573-1 (2010) Class zero TÜV certification, showing no traces of oil at all in the output air stream.

LF 10 quality air

- ISO 8573-1 Class 0 pump produces TÜV-certified 100% clean air.
- Dryer and dust particle filters come included as standard in the full feature and power pack versions.
- Elimination of oil changes ensures minimal service requirements.
- Lower total cost of ownership.

State-of-the-art engineering

1

Automotive style **cylinders** made of aluminum alloy with low tolerance finishing for extremely low clearance and minimized friction.

2

Direct drive eliminates transmission losses.

3

Industrial **unloader valve**:

- Designed to withstand extreme conditions and high working pressures.
- The unloader valve reduces starting torque for a longer compressor and motor lifetime as well as limited strain on the electricity net.


4

Single electrical connection for easy, plug-and-play installation.

5

Highest quality **components**:

- Heavy-duty sealed-for-life ball bearings selected for continuous duty and long lifetime.
- Die-cast aluminum crankcase and finned cylinder heads with high cooling characteristics, for long lifetime and efficient operation.

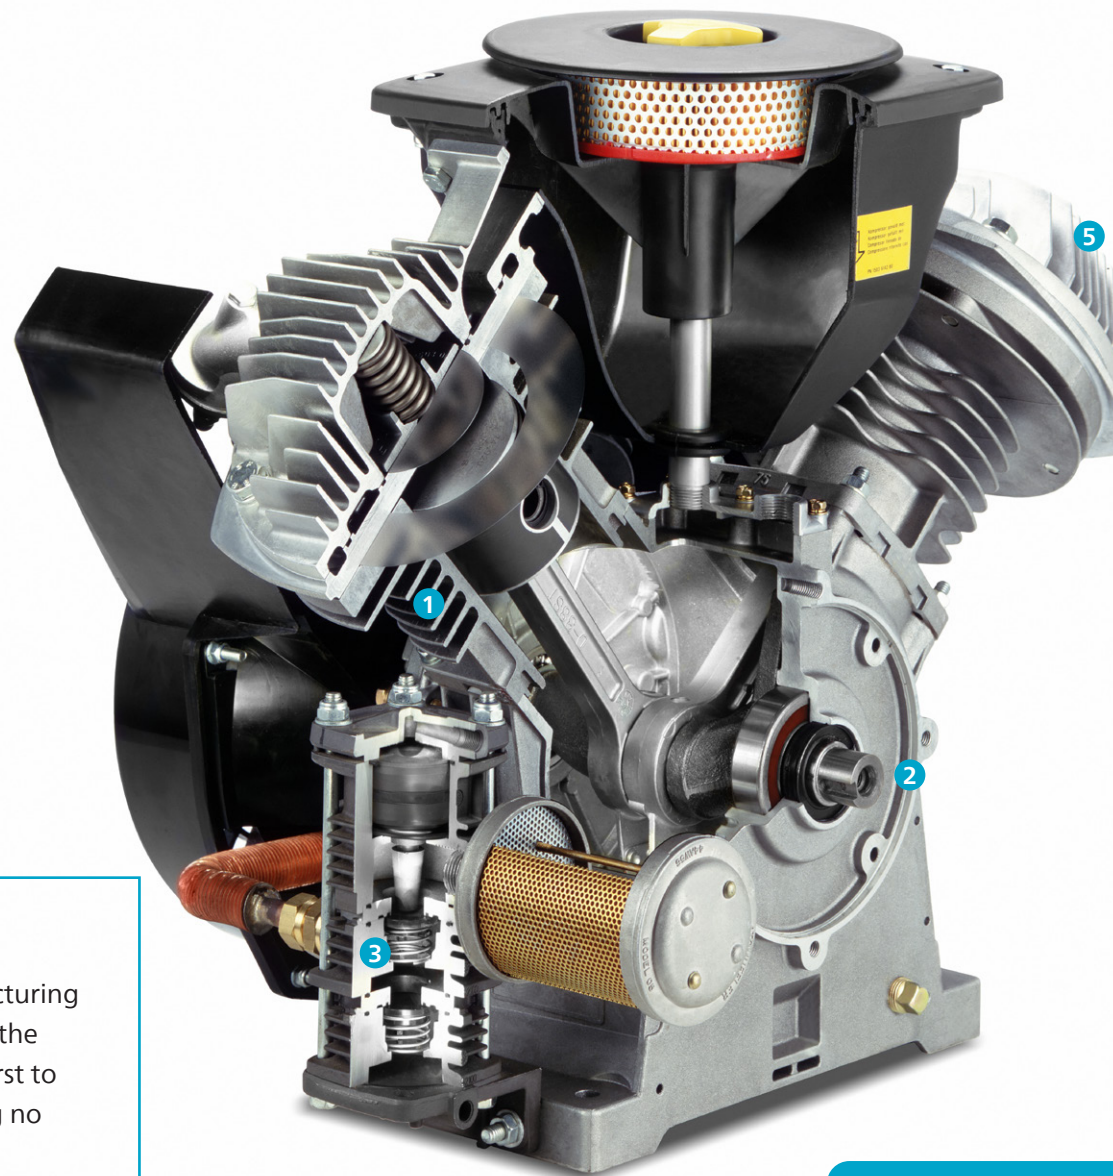

LTs & LFs 10: THE PREMIUM PISTON SOLUTION

The Atlas Copco LTs and LFs 10 add low noise and extensive controls to the traditional piston benefits of robustness, low maintenance and energy efficiency. Simply the most complete industrial piston compressors on the market today, the LTs and LFs 10 meet all your compressed air needs.

Medium-pressure piston compressors and boosters

LT 15/20/30, LT 40 & LTB 25/40 series

An Atlas Copco medium-pressure compressor is your high-performance industrial air solution. The 15/20/30 or 40-bar LT compressor and LTB 25/40 booster series generate quality air at the lowest operating temperatures in the industry and with minimal oil carryover. Their proven design and quality materials deliver premium operation and an extra-long life.



LT 15/20/30 compressor

Atlas Copco's medium-pressure compressor is designed with superior reliability, a compact footprint and optimal performance. It fits easily in all installations and applications without compromising on efficiency and dependable operation.



LT 40 compressor

The LT 40 delivers ease of use, dependable performance and energy efficiency for starting air and non-continuous applications. Compact, lightweight and built with quality components, it meets the needs of a wide variety of applications and industries (process industries, utilities, ...).

LTB 25/40 air and nitrogen booster

The LTB 25/40 gives you the benefits of producing medium-pressure air with a booster and adds Atlas Copco reliability, efficiency, and ease of use. It is designed for consistent operation, ensuring minimal downtime, maximum productivity and low operational costs. Its user-friendly interface makes the LTB 25/40 straightforward to operate, while its advanced connectivity allows for remote monitoring, data analysis, and enhanced control.

State-of-the-art booster performance

- Same machine can be used for air and nitrogen.
- 100% duty cycle allows for continuous operation.
- IE3 motor and premium design reduce operational costs.
- Touchscreen controller offers intuitive operation and engaging user experience.
- **SMARTLINK** app with remote monitoring of operational parameters and detailed performance reports.



WHAT IS A BOOSTER?

A booster is a specific type of compressor designed to compress air or gas from a lower to a significantly higher pressure. Unlike a standard compressor, a booster's suction pressure starts above ambient pressure. While a normal compressor typically reaches pressures up to 13 bar, a booster can increase the pressure to 300 bar or even higher to meet specific application requirements, such as PET bottle manufacturing, gas storage, and testing. Since boosters always work with primary compressors, this combined solution enhances energy efficiency and provides greater flexibility compared to using a high-pressure compressor.

High-pressure piston boosters

LFB 150 O2 & LTB 300 series

When you need the best in booster performance and reliability, the Atlas Copco LFB 150 O2 and LTB 300 series deliver. They are the ideal solution for any air, nitrogen or oxygen application where higher pressures are required. Their piston technology with blocks specifically designed for medium and high pressure offers industry-leading efficiency and performance.

LFB 150 O2 oxygen booster

When you generate your own oxygen and store it for use or back-up, you need an O₂ booster. The Atlas Copco LFB 150 O2 oil-free oxygen booster gives you safe, reliable and durable operation as well as premium performance.

Safe, reliable & efficient

- Oil-less design
- Extra quality features
- Vertical inline cylinder
- IE3 motor
- Non-metal piston ring
- Stainless steel cylinder with coating



LTB 300 air and nitrogen booster

High-pressure air and industrial gas applications require strong, dependable compression. The Atlas Copco LTB 300 booster will reliably meet and exceed your performance requirements. Built to Atlas Copco standards with quality components, this heavy-duty booster is available in different power sizes with a capacity from 3.3-12.5 l/s.



Quiet, efficient & reliable

- Silent from the core: optimal balancing and use of special vibration dampers.
- Energy-efficient IE3 motors.
- Plug-and-play with pre-programmed controller.
- Innovative oil lubrication system with oil ring and crankshaft channels ensures better lubrication of the cast iron cylinders.
- Efficient cooling of the unit and the compressed gas by fan, flywheel inter- and aftercoolers.

ONE-STOP-SHOP SOLUTION

Atlas Copco boosters are an ideal fit with our screw compressors or nitrogen generators. Atlas Copco can provide you with a plug-and-play all-in-one nitrogen skid for on-site nitrogen generation. Both the LTB 25/40 and LTB 300 easily fit on our skids for direct use or bottling.



OEM applications

Versatile & sustainable solutions

Tailored to perform non-stop in a wide variety of environments, Atlas Copco’s piston compressors are the premium OEM air solution. What is more, our dedicated European Piston Competence Center allows us to maintain a collaborative relationship with our OEM customers, working on both current projects and long-term solutions.

Performance & flexibility

It all starts with what we know best: our core piston technology and its proven reliability. Next, we optimize their performance within your original equipment by developing a tailored solution together. Our working relationship extends beyond yes/no answers to basic choices such as belt or direct driven, extreme temperatures, clean or harsh environments, single units or custom duplex built, ... The customization possibilities are almost endless.

Global service

Atlas Copco is a truly global organization with support available 24/7 in more than 180 countries.

Industry-specific solutions

- Transportation
- Snow making
- Solar fields
- Printing
- Box folding
- Beer production
- ... and many more

Technical specifications

Premium compressor: LFs and LTs series

Available for different supplies and models: BM, TM and FF

Compressor type	Motor power		Max. working pressure		FAD @ 50 Hz			FAD @ 60 Hz			Noise level
	kW	hp	bar	psig	l/s	m3/min	cfm	l/s	m3/min	cfm	dB(A)
LFs 5-10	4	5.5	10	145	8.2	0.49	17.4	9.1	0.55	19.3	68
LFs 7-10	5.5	7.5	10	145	11	0.66	23.3	12	0.72	25.4	72
LFs 10-10	7.5	10	10	145	15.5	0.93	32.8	18.2	1.1	38.9	74
LFs 15-10	11	15	10	145	22	1.32	46.6	24	1.44	50.8	75
LFs 20-10	15	20	10	145	31	1.86	65.6	36.4	2.2	77.8	77
LTs 5-10	4	5.5	10	145	8.4	0.5	17.8	9.7	0.58	20.5	68
LTs 7-10	5.5	7.5	10	145	11.7	0.7	24.8	13.6	0.82	28.8	72
LTs 10-10	7.5	10	10	145	15.7	0.94	33.3	18.2	1.09	38.6	74
LTs 15-10	11	15	10	145	23.4	1.4	49.6	27.2	1.6	57.6	75
LTs 20-10	15	20	10	145	31.4	1.88	66.5	36.4	2.18	77.1	77

Unit performance measured according to ISO 1217, Ed 4, Annex C-2009.
Mean noise level measured according to ISO 2151/Pneurop/Cagi PN8NTC2 test code; tolerance 3 dB(A).
BM: Base mounted, TM: Tank mounted, FF: Full Feature

Oil-free compressor: LF 10 series

Available for different supplies and models: B, PP, BM, TM and FF

Compressor type	Motor power		Max. working pressure		FAD @ 50 Hz			FAD @ 60 Hz			Noise level
	kW	hp	bar	psig	l/min	m³/h	cfm	l/min	m³/h	cfm	dB(A)
LF 2-10	1.5	2	10	145	186	11.16	6.6	216	12.96	7.6	82
LF 3-10	2.2	3	10	145	240	14.4	8.5	276	16.56	9.7	83
LF 5-10	4	5.5	10	145	492	29.52	17.4	546	32.76	19.3	83
LF 7-10	5.5	7.5	10	145	660	39.6	23.3	720	43.2	25.4	84
LF 10-10	7.5	10	10	145	930	55.8	32.8	1092	65.52	38.6	86

Comes with a choice of refrigerant, desiccant or membrane dryer technology and appropriate filters.
B: Block, PP: Power Pack, BM: Base mounted, TM: Tank mounted, FF: Full Feature

Lubricated compressor: LT 10 series

Available for different supplies and models: B, PP, BM, TM and FF

Compressor type	Motor power		Max. working pressure		FAD @ 50 Hz			FAD @ 60 Hz			Noise level
	kW	hp	bar	psig	l/min	m³/h	cfm	l/min	m³/h	cfm	dB(A)
LT 2-10	1.5	2	10	145	204	12.2	7.2	234	13.8	8.3	78
LT 3-10	2.2	3	10	145	264	15.8	9.3	306	18.6	10.8	79
LT 4-10	3	4	10	145	354	21.2	12.5	407	24.4	14.4	79
LT 5-10	4	5.5	10	145	504	30.2	17.8	582	34.8	20.6	79
LT 7-10	5.5	7.5	10	145	702	42.1	24.8	816	49.2	28.2	80
LT 10-10	7.5	10	10	145	942	56.5	33.3	1092	62.4	38.6	81

Comes with a choice of refrigerant, desiccant or membrane dryer technology and appropriate filters.
B: Block, PP: Power Pack, BM: Base mounted, TM: Tank mounted, FF: Full Feature

Lubricated compressor: LT 15/20/30 series

Available for different supplies and models: PP, BM, TM and FF

Compressor type	Motor power		Max. working pressure		FAD @ 50 Hz			FAD @ 60 Hz			Noise level dB(A)	
	kW	hp	bar	psig	l/min	m³/h	cfm	l/min	m³/h	cfm	Open	Silent
LT 2-15	1.5	2	15	218	186	11.16	6.6	216	12.96	7.6	78	63
LT 3-15	2.2	3	15	218	240	14.4	8.5	282	16.92	10.0	79	64
LT 5-15	4	5.5	15	218	408	24.48	14.4	474	28.44	16.7	79	64
LT 7-15	5.5	7.5	15	218	558	33.48	19.7	654	39.24	23.1	80	68
LT 10-15	7.5	10	15	218	708	42.48	25.0	840	50.4	29.6	81	68
LT 15-15	11	15	15	218	942	56.52	33.3	1086	65.16	38.4	86	75
LT 20-15	15	20	15	218	1128	67.68	39.9	1284	77.0	45.3	86	78
LT 2-20	1.5	2	20	290	126	7.6	4.5	162	9.72	5.7	78	63
LT 3-20	2.2	3	20	290	174	10.4	6.1	216	12.96	7.6	79	64
LT 5-20	4	5.5	20	290	300	18.0	10.6	378	22.68	13.4	79	64
LT 7-20	5.5	7.5	20	290	402	24.1	14.2	504	30.24	17.8	80	68
LT 10-20	7.5	10	20	290	546	32.8	19.3	816	48.96	28.8	81	68
LT 15-20	11	15	20	290	906	54.4	32.0	1062	63.72	37.5	86	75
LT 20-20	15	20	20	290	1080	64.8	38.1	1254	75.74	44.3	86	78
LT 3-30	2.2	3	30	435	150	9.0	5.3	186	11.16	6.6	79	64
LT 5-30	4	5.5	30	435	264	15.8	9.3	330	19.8	11.7	79	64
LT 7-30	5.5	7.5	30	435	384	23.0	13.6	480	28.8	17.0	80	68
LT 10-30	7.5	10	30	435	510	30.6	18.0	612	36.72	21.6	81	68
LT 15-30	11	15	30	435	558	33.5	19.7	666	39.96	23.5	85	76
LT 20-30	15	20	30	435	1020	61.2	36.0	1182	70.92	41.7	86	80

PP: Power Pack, BM: Base mounted, TM: Tank mounted, FF: Full Feature

Lubricated compressor: LT 40 series

Compressor type	Motor power		Max. working pressure		FAD @ 50 Hz			FAD @ 60 Hz			Noise level dB(A)	
	kW	hp	bar	psig	l/s	m³/min	cfm	l/s	m³/min	cfm	Standard	Silenced
LT 20-40	15	20	40	580	16.1	1.0	34	19.4	1.2	41	91	
LT 25-40	18.5	25			19.4	1.2	41	23.1	1.4	49	91	-
LT 30-40	22	30			27.2	1.6	58	32.7	2.0	69	91	-
LT 40-40	30	40			32.8	2.0	70	/	/	/	91	-
LT 50-40	37	50			40.8	2.4	86	47.8	2.9	101	95	-
LT 60-40	45	60			50	3.0	106	59.7	3.6	127	95	-

Oil-free compressor: LFx series

Available for different supplies and models: PB, PP, TM, and FF

Compressor type	Motor power		Max. working pressure		FAD @ 50 Hz			FAD @ 60 Hz			Noise level dB(A)	
	kW	hp	bar	psig	l/s	m³/h	cfm	l/s	m³/h	cfm	dB(A)	
LFx 0.7	0.55	0.7	10	145	1.02	3.6	2.16	1.35	4.8	2.86	64	
LFx 1.0	0.75	1	10	145	1.38	4.8	2.92	1.46	5.2	3.09	64	
LFx 1.5	1.1	1.5	10	145	2.07	7.5	4.38	2.39	8.6	5.06	67	
LFx 2.0	1.5	2	10	145	2.53	9.1	5.36	-	-	-	67	

Comes with a choice of desiccant or membrane dryer technology and appropriate filters. Available with 24, 50 and 90L vessels or as Powerbox.

PB: Powerbox, PP: Power Pack, BM: Base mounted, TM: Tank mounted, FF: Full Feature

LFB 150 O2 booster

Model	Motor power		Inlet pressure		Outlet pressure		Maximum FAD @ 50 & 60 Hz		
	hp	kW	bar	psig	bar	psig	l/s	cfm	m³/h
LFB 4A-150 O2	4	3	3-4	43.5-58	80-150	1160-2176	0.8	1.8	3
LFB 4B-150 O2							1.7	3.5	6
LFB 7A-150 O2	7.5	5.5					2.2	4.7	8
LFB 7B-150 O2							3.3	7.1	12
LFB 15A-150 O2	15	11					4.2	8.8	15
LFB 15B-150 O2							5.6	11.8	20
LFB 15C-150 O2							7	14.7	25
LFB 15D-150 O2							11.1	23.5	40
LFB 20-150 O2							20	15	13.9

Notes:
FAD is based on maximum inlet pressure & maximum outlet pressure.
FAD is tested based on ISO 1217 Ed4 2009 (ambient temperature 20°C and relative humidity 0%).

LTB 25/40 booster

Model	Motor power		Inlet pressure		Outlet pressure		Maximum FAD @ 50 & 60 Hz		
	hp	kW	bar	psig	bar	psig	l/s	cfm	m³/hr
LTB 10-25	10	7.5	2-5	29-72.5	10-25	145-362.5	28.5	60	102
LTB 15-25	15	11					35.3	75	127
LTB 20-25	20	15					49.8	105	179
LTB 25-25	25	18.5					64.2	136	231
LTB 10-40	10	7.5	6-10	87-145	25-40	290-580	34.7	73	125
LTB 15-40	15	11					48.5	103	174
LTB 20-40	20	15					63.8	135	229
LTB 25-40	25	18.5					77.5	164	278
LTB 30-40	30	22					94.2	199	338
LTB 40-40	40	30					124.8	264	448

Notes:
FAD is based on maximum inlet pressure & maximum outlet pressure.
FAD is tested based on ISO 1217 Ed4 2009 (ambient temperature 20°C and relative humidity 0%).

LTB 300 booster

Model	Motor power		Inlet pressure		Outlet pressure		Maximum FAD @ 50 & 60 Hz		
	hp	kW	bar	psig	bar	psig	l/s	cfm	m³/hr
LTB 5-300*	5	3.7	5-9	72.5-130.5	90-300	1305-4351	5.0	10	18
LTB 7-300	7	5.5	5-11	72.5-159.5			7.9	17	28
LTB 10-300	10	7.5	7-10	101.5-145			10.8	23	39
LTB 15-300	15	11					12.5	26	45
LTB 20-300**	15	11	2-4	29-58			13.8	29	50

Notes:
* Only for North America.
** Not available for North America.
FAD is based on maximum inlet pressure & maximum outlet pressure.
FAD is tested based on ISO 1217 Ed4 2009 (ambient temperature 20°C and relative humidity 0%).

Options

Tailor your Atlas Copco piston compressor

	LFx	LF 10	LFs 10	LT 10	LTs 10	LT 15/20/30	LT 40	LTB 25/40	LTB 300	LFB 150 O2
Silenced hood	✓	O	✓	O	✓	O			✓	
Receiver upgrade	O	O	O	O	O	O				
Vertical receiver		O		O						
Timer drain	O	O	O	O	O	O			✓	
Hour meter	O	✓	✓	✓	✓	✓		✓	✓	
Oil-level switch				O	✓	O		✓		
CD dryer	O	O		O		O				
Heavy-duty inlet filter		O		O		O				
Wheel set	O	O		O						
Low duty cycle option				O	✓					
Control panel			✓		✓		O	✓	✓	
HP filter							O	O	O	
HP vessel/bottles						O			O	

Note: Some options can be limited in power size or variant or not compatible with other options.



Atlas Copco

atlascopco.com

