

Experience the power of electric!

Seven models with different pressure and flow combinations



Power Technique

Atlas Copco



It's time to go electric!


The electric portable compressor range is our latest innovation in compressed air. A combination of smart engineering, time tested technology and quality components all add up to a solution that is highly energy efficient with extreme versatility. It is suitable for a wide range of applications which will give you low cost of ownership and better environment footprint.

TECHNICAL DATA



Compressor Type		XA 140E	XA 400E	XAM 350E	XA 500E	XAM 450E	XAT 400E	XAH 375E
Normal effective working pressure	bar(e)	7	7	9	7	8.6	10.3	12
	psig	100	100	130	100	125	150	175
Actual free air delivery guaranteed according to ISO1217 ed.3 1996 annex D	cfm	300	380	325	475	425	390	370
Max. ambient temperature	°C	50	50	50	50	50	50	50
Min. starting temperature	°C	0	0	0	0	0	0	0
Motor								
Output according to EN60034-1/IEC34-1	kW	45	55	55	75	75	75	75
Operating Voltage (+/- 15%)	V	400	400	400	400	400	400	400
Frequency	HZ	50	50	50	50	50	50	50
Insulation class		IP55/F	IP55/F	IP55/F	IP55/F	IP55/F	IP55/F	IP55/F
Dimensions and weight: box								
Length	mm	NA	2570	2570	2570	2570	2570	2570
Width	mm	NA	1144	1144	1144	1144	1144	1144
Height	mm	NA	1295	1295	1295	1295	1295	1295
Weight	kg	NA	1250	1250	1250	1250	1250	1250
Dimensions and weight: undercarriage								
Length (fixed towbar)	mm	3212	3821	3821	3821	3821	3821	3821
Width	mm	1500	1621	1621	1621	1621	1621	1621
Height	mm	1614	1615	1615	1615	1615	1615	1615
Weight	kg	1200	1524	1524	1524	1524	1524	1524

STANDARD FEATURES

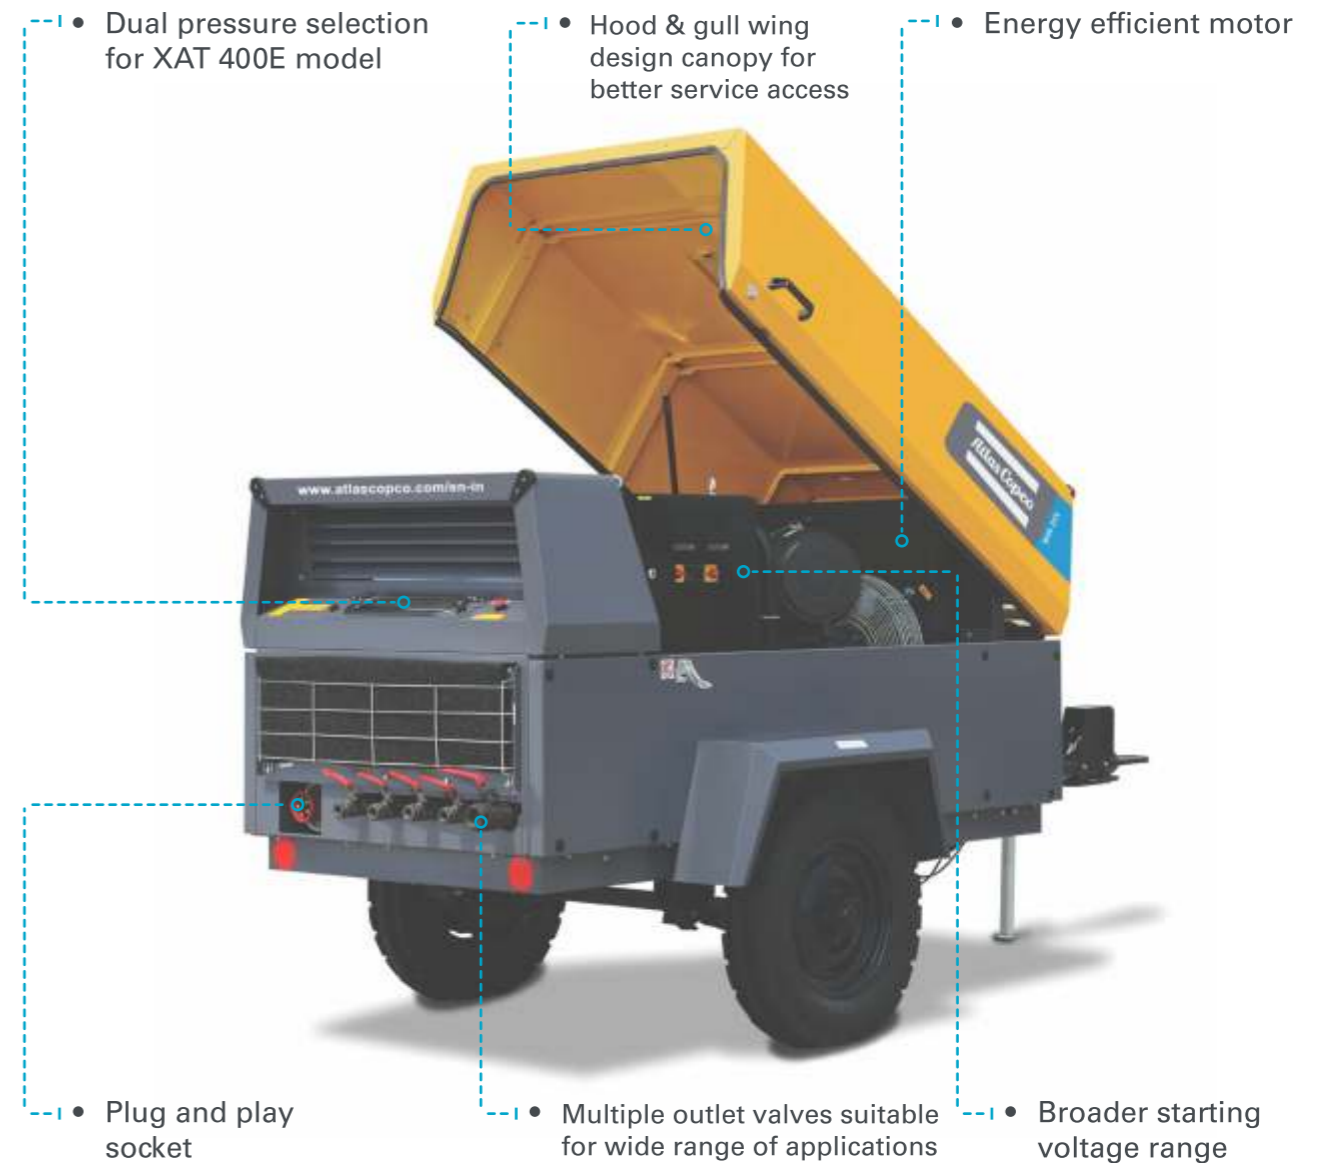

<p>VERSATILITY</p> <p>1 machine = 2 applications</p>	<p>BROAD CHOICE</p> <p>7 models</p>	<p>LOW OPERATION COST</p> <p>~10% less power consumption</p>
<p>SAFETY</p> <p>5 pin socket</p>	<p>OPTIMUM PERFORMANCE</p> <p>up to 475 cfm & 12 bar</p>	<p>EASY STARTING</p> <p>±15% starting voltage</p>

* All claims are under specific conditions

Portable energy solutions portfolio

AIR COMPRESSORS

READY TO GO

- 160-410 cfm
- 7-8.5 bar



VERSATILITY

- 436-675 cfm
- 10.5-20 bar



PRODUCTIVITY PARTNER

- 1000-1350 cfm
- 19-35 bar



Diesel and electric options available.

GENERATORS

PORTABLE

- 60-80-100 kVA



MOBILE

- 9-1250* kVA



INDUSTRIAL

- 10-1250* kVA



*Multiple configurations available to produce power for any size application.

DEWATERING PUMPS

ELECTRIC SUBMERSIBLE

- 275-16.500 l/min



DIESEL DRIVEN CANOPY

- 833-9833 l/min



DIESEL DRIVEN OPEN FRAME

- 3300-7500 l/min



LIGHTTOWERS

LED



METAL HALIDE



SOLAR



For more information, Please reach us at 1800 200 0030 or Email us at cr.india@in.atlascopco.com

For details contact:

S Kumar : +91 93710 19853, E-mail: s.kumar@in.atlascopco.com

Fenil Shah : +91 70304 64386, E-mail: fenil.shah@in.atlascopco.com

Committed to sustainable productivity

We stand by our responsibilities towards our customers, towards the environment and the people around us. We make performance stand the test of time. This is what we call – Sustainable Productivity.

Atlas Copco Power Technique
Atlas Copco (India) Ltd.
Sveanagar, Dapodi, Pune 411 012, India.
Email : cr.india@in.atlascopco.com
Reach us @ 1800 200 0030
www.atlascopco.com/en-in

Atlas Copco