

Rotary lobe blower packages




Atlas Copco

ZL 100 - 10000 1.5 - 250 kW





- Countries covered by Atlas Copco Customers Centers
- Production sites

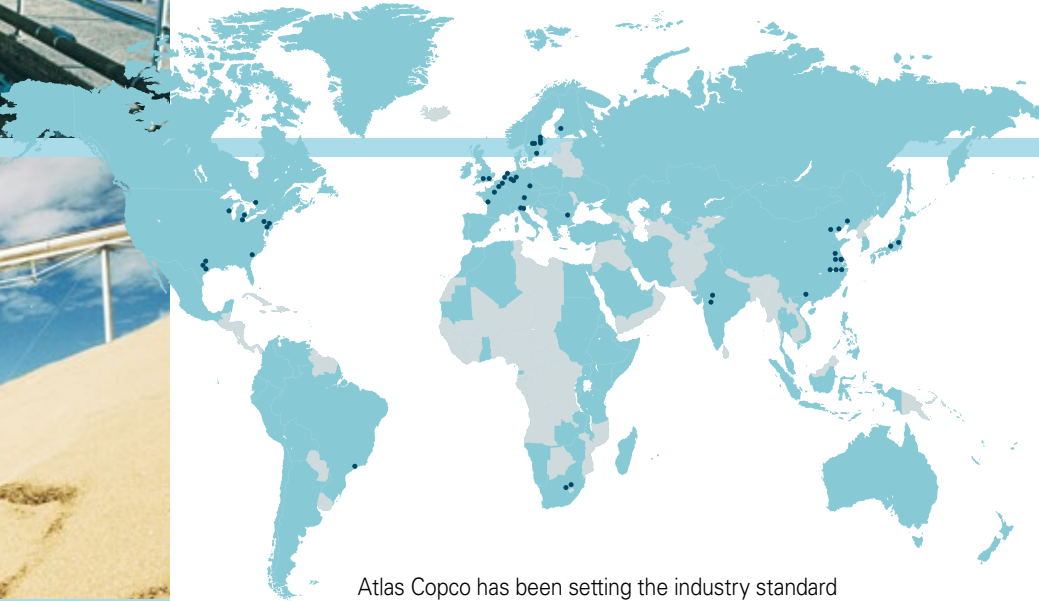

Atlas Copco has been setting the industry standard in compressed air technology for more than a century. An on-going interaction with our customers, a passion to bring true innovations that increase their productivity, and the commitment to create more value for them, have earned us the market leadership.

Our dedication to offer the best products and services is not limited to Plant Air solutions, but extends to Low Pressure Air applications, meeting the exact needs of the specific process. Around the clock and around the globe, the ZL blower series is proving to be a trusted partner for the low pressure air process.



Reliable, quality air



Whether it is for pneumatic conveying of granulates or powders, liquid homogenizing, aeration and filter flushing in water treatment plants, air supply to furnaces, drying of yarn or process air in chemical plants, the ZL series offers reliable, uninterrupted operation around the clock.

Complete range


The ZL range consists of 20 sizes for intake volumes of 100 to over 10000 m³/h, at pressures of up to 1000 mbar, depending on the blower size.

The Atlas Copco ZL is a low noise, low vibration and low pulsation blower that comes in a complete, ready-to-run package. Because of the total separation of element and oil system, the ZL blower delivers top quality oil-free air; the risk of product contamination or environmental pollution is non-existent by design.

The tri-lobe concept and the pre-filling canals ensure low pulsation air, a prolonged lifetime of rotating components, reduced noise and vibration levels and improved energy efficiency.



Range chart

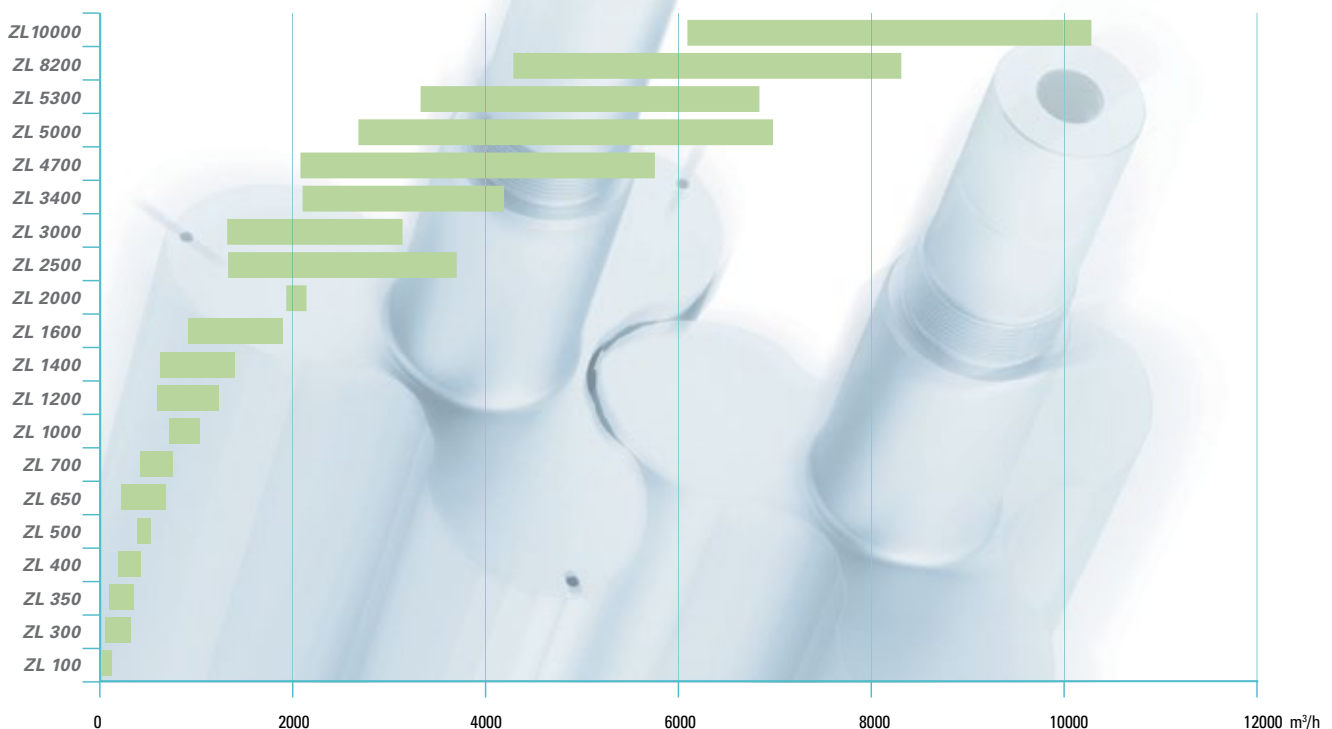

Rational design for superior performance



Ruggedized filter/inlet
for reduced vibrations




Suitable for harsh
environments




IP55 electric motor
compact design for space savings



Start-up & pressure relief valve
reliable and simple



Flanged outlet
for simplified piping connection

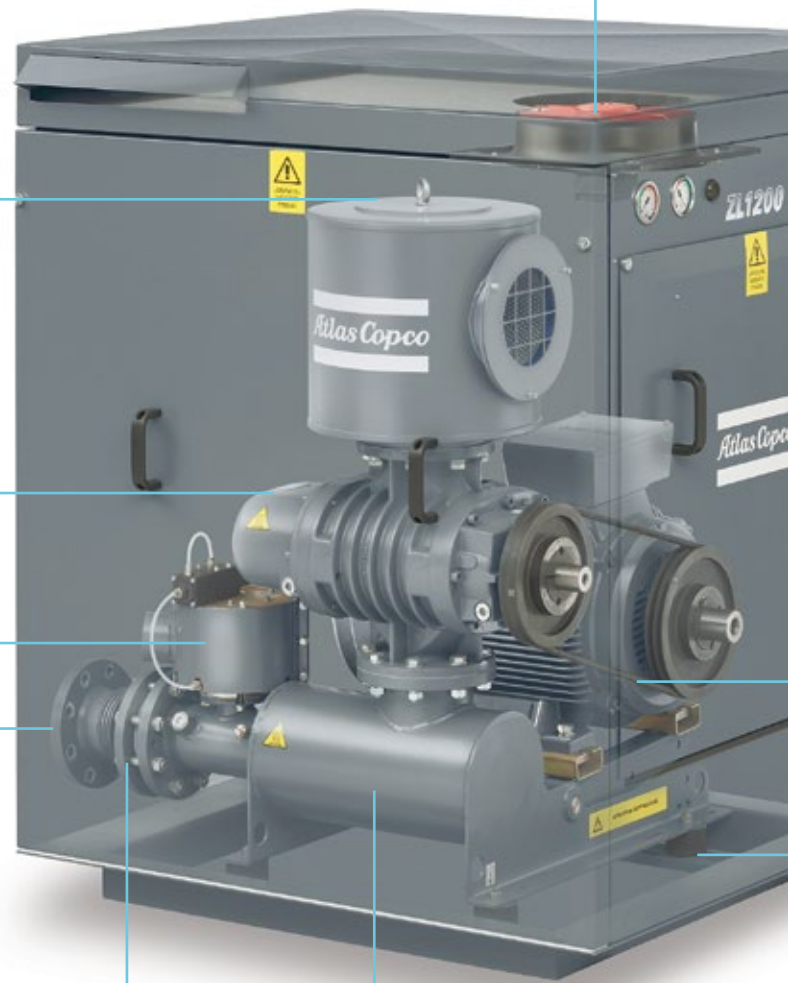

Check valve
for easy field installation



Complete package



Automatic belt tensioner
for longer belt lifetime and
reduced maintenance



Vibro-isolating mounts
for low vibration and quieter
operation



Integral outlet silencer
for dampening of pressure
pulsations

The Atlas Copco ZL blower comes as a fully equipped machine. There are no hidden extras or costly additions.

Standard version

- IP55 electric motor
- inlet and outlet silencers
- inlet filter
- pressure relief valve (ZL 100 - 700)
- start valve / pressure relief valve (ZL 1000 - 10000)
- outlet flange compensator
- outlet check valve
- automatic belt tensioner
- filter change indicator
- discharge pressure gauge
- low vibration and quieter operation belt-drive cover
- package vibration isolators

Options

- sound insulated enclosure with canopy ventilation
- fitted with Full Option motor
- no motor
- belt guard (models with canopy)
- oil fill

Trusted technology


In the ZL blower element, two tri-lobe rotors turn inside an oval shaped casing. The motor transmits its power to the driving lobe, which in turn drives the driven lobe via timing gears. Hence, both rotors turn at the same speed, in opposite directions.

The rotors maintain a high precision clearance between each other and the wall of the casing. As a result, no internal lubrication is required and air remains 100% oil-free.

Compression principle

As the rotors turn, air is drawn into the blower when the lobe end of each rotor passes the suction port. The air is caught between two rotor tips and the casing; as the rotors continue their revolution, this volume is transferred from suction side to discharge side. With each turn, six of these enclosed volumes are displaced.

The ZL series delivers an almost constant flow rate, independent of the discharge pressure conditions. The flow rate is proportional to the operating speed.

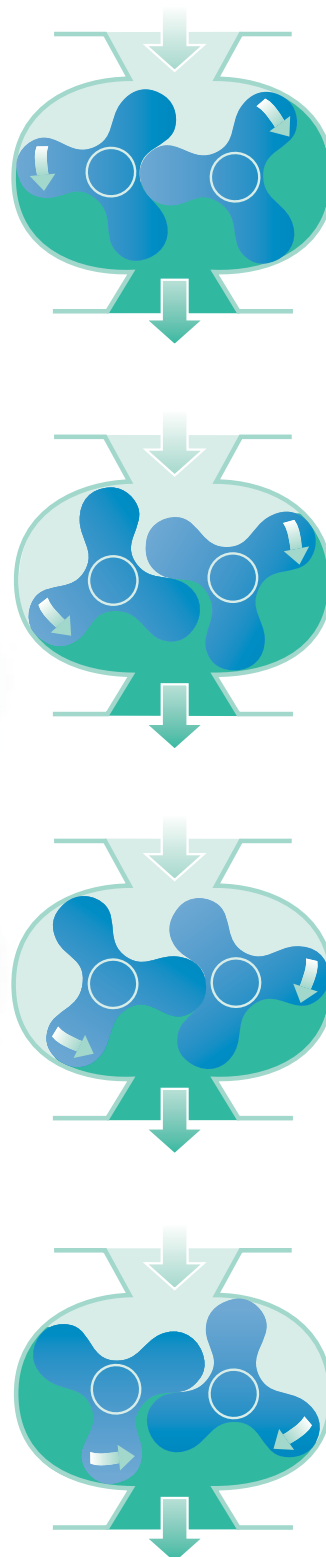


Tri-lobe advantages

Pulsation-free air

Traditionally, positive displacement blowers were designed around two-lobe rotors. The ZL series is based on tri-lobe rotors, which offer superior energy efficiency and a significantly smoother flow.

For further reduction of pressure pulsations, special canals have been milled in the blower casing, to pre-fill the reverse chamber. This design prolongs the lifetime of the flexible elements of aerating systems, but also protects conveyor systems against undesirable pulsations. Inside the blower, the reduction in pulsations has many advantages as well: less vibrations are transmitted to the bearings, increasing bearing lifetime.

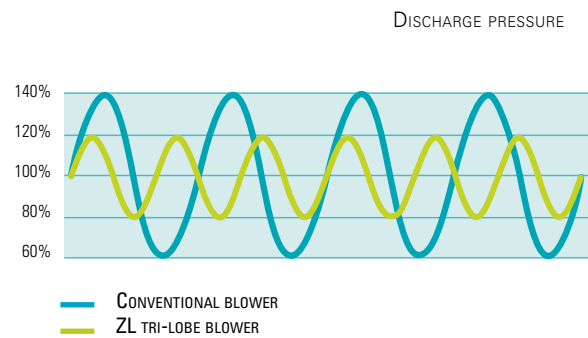

An additional advantage of this design is that the sound waves produced by the pre-filling cancel out much of the noise produced by the blower, resulting in an overall reduction of the noise level.

Low noise

The innovative design of the element, with its pre-filling canals, decreases noise levels substantially.



Inlet silencer

Pulsation noises are better contained within the rugged designed blower silencer.



Superior element design


Precisely balanced tri-lobe rotor with pre-filling canals, for lowest air pulsations, a long bearing lifetime, less vibrations and lower noise



Integral outlet silencer

Dampening of pressure pulsations are made via the purpose designed outlet silencer.

Global presence – Local service

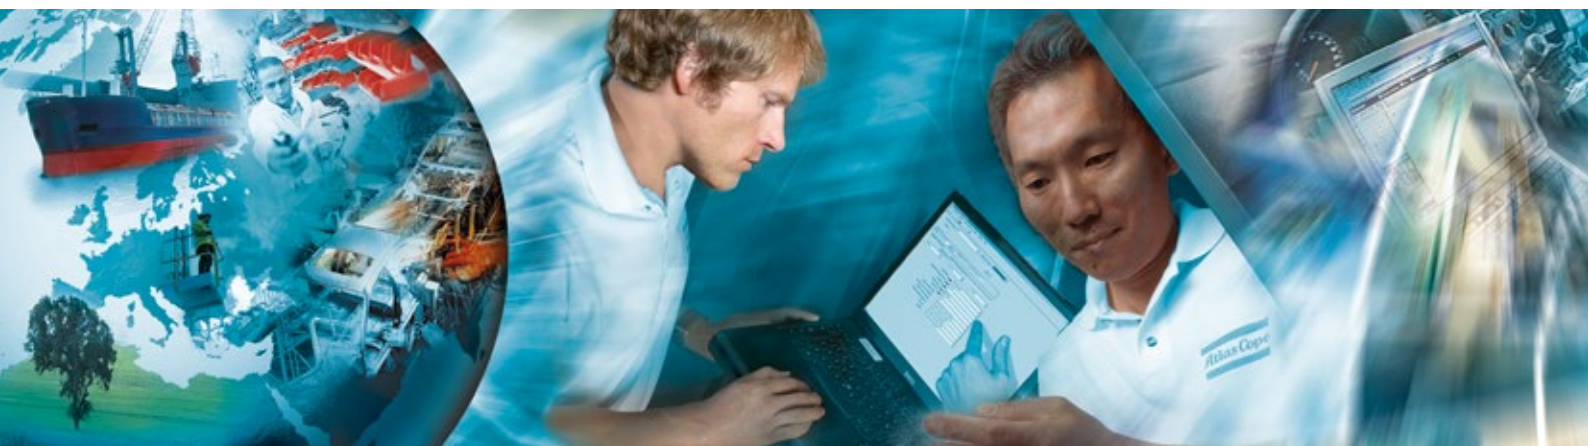

Our Aftermarket product portfolio is designed to add maximum value for our customers by ensuring the optimum availability and reliability of their compressed air equipment with the lowest possible operating costs. We deliver this complete service guarantee through

our extensive Aftermarket organization, maintaining our position as the leader in compressed air.



Full range of available Aftermarket products and activities

Activity	Product*
Genuine parts	Atlas Copco Service kits & oils
Extended warranties	AIRXtend
Service contracts	ServicePlan
System audits	AIRScan™
Remote monitoring	AIRConnect™
Energy saving	AIROptimizer™
Product improvements	Upgrade programs

* more information is available from your local Atlas Copco customer centre

Technical data

ZL 100



Q [m³/h]: capacity of blower aggregate
 T [°C]: temperature on the discharge blower flange
 Pe [kW]: blower input
 Pm [kW]: motor load
 n [rpm]: blower speed
 LmA [dB]: level of acoustic pressure with and without noise enclosure

Δp mbar	ZL 100								
	C	D	E	F	G	H	I	J	
300	Q [m³/h]						91	104	
	T [°C]						48	48	
	Pe [kW]						0.94	1.06	
	Pm [kW]						1.5	1.5	
	element rpm						4317	4856	
	LmA [dB]						78/88	79/91	
	400	Q [m³/h]				62	71	77	90
T [°C]					61	60	63	58	58
Pe [kW]					0.92	1.03	1.1	1.25	1.41
Pm [kW]					1.5	1.5	1.5	2.2	2.2
element rpm					3183	3561	3830	4347	4890
LmA [dB]					78/88	79/89	79/90	80/91	81/93
500		Q [m³/h]			52	60	70	77	89
	T [°C]			74	72	71	70	69	68
	Pe [kW]			1.03	1.14	1.3	1.4	1.56	1.76
	Pm [kW]			1.5	1.5	2.2	2.2	2.2	2.2
	element rpm			2860	3183	3586	3857	4347	4891
	LmA [dB]			78/88	78/89	80/90	80/91	81/92	82/94
	600	Q [m³/h]	34	41	52	60	69	76	88
T [°C]		95	91	86	84	82	81	79	78
Pe [kW]		0.92	1.05	1.23	1.38	1.54	1.66	1.9	2.2
Pm [kW]		1.5	1.5	1.5	2.2	2.2	2.2	3	3
element rpm		2135	2427	2860	3206	3586	3857	4362	4908
LmA [dB]		77/87	78/88	79/89	80/90	81/91	81/92	82/93	83/95
700		Q [m³/h]	31	40	51	59	69	75	87
	T [°C]	112	104	98	95	93	91	89	88
	Pe [kW]	1.01	1.22	1.45	1.6	1.8	1.92	2.2	2.5
	Pm [kW]	1.5	1.5	2.2	2.2	2.2	3	3	3
	element rpm	2021	2427	2880	3206	3586	3871	4362	4908
	LmA [dB]	77/87	78/88	80/90	81/91	82/92	82/93	83/94	83/95

Reference conditions: Inlet pressure: 1.013 bar(a) - Inlet temperature: 20°C dry air

Technical data

ZL 300



Q [m³/h]: capacity of blower aggregate

T [°C]: temperature on the discharge blower flange

Pe [kW]: blower input

Pm [kW]: motor load

n [rpm]: blower speed

LmA [dB]: level of acoustic pressure with and without noise enclosure

Δp mbar	ZL 300											
	A	B	C	D	E	F	G	H	I	J	K	
300	Q [m³/h]	83	99	122	133	153	180	206	238	253	268	304
	T [°C]	55	53	52	51	50	50	49	49	49	49	48
	Pe [kW]	1.1	1.2	1.4	1.5	1.7	2	2.2	2.5	2.6	2.8	3.2
	Pm [kW]	1.5	1.5	2.2	2.2	2.2	3	3	4	4	4	4
	element rpm	2021	2296	2688	2880	3214	3673	4128	4668	4923	5187	5810
	LmA [dB]	69/83	70/88	71/89	71/89	72/91	73/92	73/92	74/93	75/94	76/96	81/102
400	Q [m³/h]	79	95	118	129	149	176	203	233	250	266	302
	T [°C]	70	67	64	64	62	60	60	59	59	59	58
	Pe [kW]	1.4	1.6	1.9	2	2.3	2.6	3	3.3	3.5	3.7	4.2
	Pm [kW]	2.2	2.2	3	3	3	4	4	4	5.5	5.5	5.5
	element rpm	2035	2312	2697	2890	3225	3692	4150	4668	4957	5223	5850
	LmA [dB]	70/83	71/89	71/90	72/91	73/92	73/92	74/93	75/94	76/96	77/97	82/103
500	Q [m³/h]	74	91	114	126	146	172	201	232	247	262	298
	T [°C]	85	74	77	75	73	71	70	69	69	69	68
	Pe [kW]	1.8	2	2.3	2.5	2.8	3.2	3.7	4.2	4.4	4.6	5.5
	Pm [kW]	2.2	3	3	4	4	4	5.5	5.5	5.5	5.5	7.5
	element rpm	2035	2312	2697	2905	3242	3692	4178	4700	4957	5223	5860
	LmA [dB]	71/83	71/90	72/91	73/92	74/93	74/93	75/94	76/96	76/97	77/98	82/103
600	Q [m³/h]	70	88	105	123	144	171	198	229	244	260	296
	T [°C]	103	96	82	88	85	83	81	79	79	79	78
	Pe [kW]	2.1	2.4	2.7	3	3.4	3.9	4.4	5	5.2	5.5	6.2
	Pm [kW]	3	3	4	4	5.5	5.5	5.5	7.5	7.5	7.5	7.5
	element rpm	2023	2312	2596	2905	3264	3718	4178	4708	4966	5232	5860
	LmA [dB]	72/89	72/91	73/92	73/94	74/94	74/95	75/95	76/96	77/98	78/98	83/104
700	Q [m³/h]	67	85	102	121	141	168	195	226	241	257	295
	T [°C]	121	111	106	101	98	94	92	90	89	90	88
	Pe [kW]	2.4	2.8	3	3.6	4	4.5	5.1	5.8	6.1	6.4	7.3
	Pm [kW]	3	4	4	5.5	5.5	5.5	7.5	7.5	7.5	7.5	11
	element rpm	2023	2324	2596	2925	3264	3718	4185	4708	4966	5232	5880
	LmA [dB]	72/90	73/92	73/93	74/94	74/95	75/96	76/97	77/98	78/98	78/99	84/106
800	Q [m³/h]		83	100	119	139	166	193	225	240	256	293
	T [°C]		128	120	114	110	106	103	101	100	100	98
	Pe [kW]		3.2	3.6	4	4.5	5.2	5.8	6.6	7	7.3	8.3
	Pm [kW]		4	5.5	5.5	5.5	7.5	7.5	11	11	11	11
	element rpm		2324	2614	2925	3264	3724	4185	4725	4983	5250	5880
	LmA [dB]		73/92	73/93	74/95	74/95	75/96	76/97	77/98	78/99	79/100	84/107
900	Q [m³/h]			98	116	137	164	192	223	238	254	290
	T [°C]			135	128	123	118	114	112	111	111	108
	Pe [kW]			4.1	5	5.1	5.8	6.6	7.4	7.8	8.2	9.3
	Pm [kW]			5.5	5.5	7.5	7.5	11	11	11	11	11
	element rpm			2614	2925	3270	3724	4200	4725	4983	5250	5880
	LmA [dB]			74/95	74/95	75/96	76/97	77/98	78/99	79/100	80/101	84/106
1000	Q [m³/h]					135	162	190	221	236	252	
	T [°C]					136	130	126	123	123	120	
	Pe [kW]					5.7	6.5	7.3	8.2	8.7	9.2	
	Pm [kW]					7.5	7.5	11	11	11	11	
	element rpm					3270	3724	4200	4725	4983	5250	
	LmA [dB]					76/97	76/98	78/99	79/100	80/101	82/104	

Reference conditions: Inlet pressure: 1.013 bar(a) - Inlet temperature: 20°C dry air

Technical data

ZL 350



Q [m³/h]: capacity of blower aggregate
 T [°C]: temperature on the discharge blower flange
 Pe [kW]: blower input
 Pm [kW]: motor load
 n [rpm]: blower speed
 LmA [dB]: level of acoustic pressure with and without noise enclosure

Δp mbar	ZL 350											
	A	B	C	D	E	F	G	H	I	J	K	
300	Q [m³/h]	131	160	175	200	215	235	250	270	289	309	330
	T [°C]	53	51	51	50	50	50	50	49	49	49	49
	Pe [kW]	1.6	2	2	2.2	2.4	2.6	2.7	2.9	3.1	3.3	3.5
	Pm [kW]	2.2	2.2	3	3	3	4	4	4	4	4	5.5
	element rpm	2312	2688	2890	3225	3429	3692	3891	4150	4409	4668	4957
	LmA [dB]	69/83	70/88	71/89	71/89	72/91	73/92	73/92	74/93	75/94	76/96	77/97
	400	Q [m³/h]	126	155	171	196	212	232	247	267	286	306
T [°C]		65	63	62	61	61	60	60	59	60	59	59
Pe [kW]		2.1	2.4	2.6	2.9	3.1	3.4	3.6	3.82	4	4.33	4.6
Pm [kW]		3	3	4	4	4	5.5	5.5	5.5	5.5	5.5	5.5
element rpm		2312	2697	2905	3242	3447	3718	3917	4178	4440	4700	4957
LmA [dB]		70/83	71/89	71/90	72/91	73/92	73/92	74/93	75/94	76/96	77/97	78/98
500		Q [m³/h]	121	151	166	193	209	228	243	262	283	302
	T [°C]	79	75	74	72	72	71	71	70	70	69	69
	Pe [kW]	2.6	3	3.25	3.7	3.9	4.2	4.4	4.73	5	5.4	5.7
	Pm [kW]	4	4	4	5.5	5.5	5.5	5.5	5.5	7.5	7.5	7.5
	element rpm	2324	2711	2905	3264	3470	3718	3917	4178	4447	4708	4957
	LmA [dB]	71/83	71/90	72/91	73/92	74/93	74/93	75/94	76/96	76/97	77/98	78/99
	600	Q [m³/h]	118	140	164	190	205	224	239	259	279	299
T [°C]		93	89	86	84	83	82	82	80	80	79	79
Pe [kW]		3.1	3.9	4	4.4	4.7	5	5.3	5.7	6	6.4	6.8
Pm [kW]		4	5.5	5.5	5.5	5.5	7.5	7.5	7.5	7.5	7.5	11
element rpm		2324	2614	2925	3264	3470	3724	3924	4185	4447	4708	4983
LmA [dB]		72/89	72/91	73/92	73/94	74/94	74/95	75/95	76/96	77/98	78/98	79/100
700		Q [m³/h]	116	137	160	187	202	221	236	257	277	297
	T [°C]	107	103	99	96	95	93	93	91	91	90	89
	Pe [kW]	3.63	4	4.6	5.1	5.4	5.85	6.2	6.6	7	7.5	8.5
	Pm [kW]	5.5	5.5	5.5	7.5	7.5	7.5	7.5	11	11	11	11
	element rpm	2340	2614	2925	3270	3476	3724	3924	4200	4462	4725	5250
	LmA [dB]	72/90	73/92	73/93	74/94	74/95	75/96	76/97	77/98	78/98	79/99	80/100
	800	Q [m³/h]	110	131	158	184	200	219	234	254	274	294
T [°C]		123	117	112	108	107	104	104	102	102	100	99
Pe [kW]		4.1	5	5.2	5.85	6.2	6.7	7	7.55	8	8.5	9.5
Pm [kW]		5.5	5.5	7.5	7.5	7.5	11	11	11	11	11	11
element rpm		2301	2574	2930	3277	3476	3737	3937	4200	4462	4725	5250
LmA [dB]		73/92	73/93	74/95	74/95	75/96	76/97	77/98	78/99	79/100	80/101	81/102
900		Q [m³/h]	106	129	156	183	198	217	232	252	272	
	T [°C]	139	131	124	120	119	116	116	113	113		
	Pe [kW]	4.6	5	5.9	6.6	7	7.5	7.9	8.5	9		
	Pm [kW]	5.5	7.5	7.5	11	11	11	11	11	11		
	element rpm	2285	2578	2930	3288	3488	3737	3937	4200	4462		
	LmA [dB]	73/93	74/95	74/95	75/96	76/97	77/98	78/99	79/100	80/102		
	1000	Q [m³/h]			154	181	196	215	230	250	270	
T [°C]				137	132	131	127	127	124	124		
Pe [kW]				6.6	7.3	7.7	8.4	8.8	9.4	10		
Pm [kW]				11	11	11	11	11	11	15		
element rpm				2940	3288	3488	3737	3937	4200	4462		
LmA [dB]				75/96	76/97	77/98	78/99	79/100	80/101	81/102		

Reference conditions: Inlet pressure: 1.013 bar(a) - Inlet temperature: 20°C dry air

Technical data

ZL 400 - 500



Q [m³/h]: capacity of blower aggregate

T [°C]: temperature on the discharge blower flange

Pe [kW]: blower input

Pm [kW]: motor load

n [rpm]: blower speed

LmA [dB]: level of acoustic pressure with and without noise enclosure

Δp mbar	ZL 400							ZL 500				
	A	B	C	D	E	F	G	H	I	J	K	
300	Q [m³/h]	222	260	297	340	362	385	401	424	453	482	511
	T [°C]	50	50	49	49	49	49	49	48	48	48	48
	Pe [kW]	2.5	2.8	3.2	3.6	3.8	4	4.1	4.4	4.7	5	5.3
	Pm [kW]	3	4	4	5.5	5.5	5.5	5.5	5.5	5.5	7.5	7.5
	element rpm	2550	2905	3247	3648	3854	4061	4210	4432	4698	4972	5239
	LmA [dB]	70/91	71/92	71/92	72/92	73/93	74/94	74/94	76/95	77/97	77/98	80/100
400	Q [m³/h]	217	256	293	334	356	379	397	419	447	478	506
	T [°C]	62	60	60	59	59	58	59	58	58	58	58
	Pe [kW]	3.3	3.8	4.2	4.8	5	5.3	5.5	5.8	6.2	6.6	7
	Pm [kW]	4	5.5	5.5	7.5	7.5	7.5	7.5	7.5	7.5	11	11
	element rpm	2563	2925	3269	3654	3860	4068	4217	4439	4706	4989	5256
	LmA [dB]	71/91	71/92	71/92	72/92	73/93	73/94	75/95	76/96	77/97	78/98	81/101
500	Q [m³/h]	213	250	288	329	351	375	391	415	444	472	501
	T [°C]	73	72	70	69	69	68	69	68	68	67	67
	Pe [kW]	4.1	4.7	5.3	5.9	6.2	6.6	6.9	7.2	7.7	8.2	8.7
	Pm [kW]	5.5	5.5	7.5	7.5	7.5	11	11	11	11	11	11
	element rpm	2580	2925	3275	3654	3860	4081	4232	4455	4722	4989	5256
	LmA [dB]	72/92	72/93	73/94	73/94	74/95	74/95	76/97	78/98	79/99	80/100	82/102
600	Q [m³/h]	208	246	283	325	348	370	386	410	439	468	497
	T [°C]	86	83	81	80	80	79	79	78	78	77	77
	Pe [kW]	4.9	5.6	6.3	7.1	7.5	7.9	8.2	8.6	9.2	9.8	10.3
	Pm [kW]	7.5	7.5	7.5	11	11	11	11	11	11	15	15
	element rpm	2585	2930	3275	3666	3874	4081	4232	4455	4722	4989	5256
	LmA [dB]	73/94	73/95	74/95	75/96	76/96	77/97	77/98	78/98	79/99	80/101	82/102
700	Q [m³/h]	204	243	280	321	344	366	382	406	435	464	493
	T [°C]	98	95	92	91	91	89	89	88	88	87	87
	Pe [kW]	5.7	6.5	7.3	8.2	8.7	9.2	9.5	10.1	10.7	11.3	12
	Pm [kW]	7.5	11	11	11	11	11	11	15	15	15	15
	element rpm	2585	2940	3286	3666	3874	4081	4232	4455	4722	4989	5256
	LmA [dB]	74/94	75/96	76/96	76/97	77/97	77/98	78/98	79/99	80/100	81/101	82/102
800	Q [m³/h]	201	239	276	318	340	362	379	403	432	460	489
	T [°C]	111	107	104	102	101	100	100	98	98	97	97
	Pe [kW]	6.6	7.5	8.4	9.4	9.9	10.5	10.9	11.5	12.2	12.9	13.6
	Pm [kW]	11	11	11	11	15	15	15	15	15	15	18.5
	element rpm	2594	2940	3286	3666	3874	4081	4232	4455	4722	4989	5256
	LmA [dB]	74/95	75/96	76/97	77/97	78/98	78/99	79/99	80/100	81/101	82/103	83/104
900	Q [m³/h]	198	236	273	314	337	359	376	400	428	457	486
	T [°C]	124	119	115	113	112	110	111	109	108	107	106
	Pe [kW]	7.4	8.4	9.4	10.5	11.1	11.7	12.2	12.9	13.7	14.5	15.3
	Pm [kW]	11	11	11	15	15	15	15	15	18.5	18.5	18.5
	element rpm	2594	2940	3286	3666	3874	4081	4232	4455	4722	4989	5256
	LmA [dB]	74/96	76/97	77/98	78/98	78/99	79/100	80/101	81/102	82/103	82/104	83/105
1000	Q [m³/h]	195	233	270	312	334	356	373	397	426		
	T [°C]	137	131	127	124	123	131	121	119	118		
	Pe [kW]	8.2	9.3	10.4	11.7	12.4	13	13.5	14.3	15.2		
	Pm [kW]	11	11	15	15	15	18.5	18.5	18.5	18.5		
	element rpm	2594	2940	3286	3666	3874	4081	4232	4455	4722		
	LmA [dB]	74/95	76/96	77/98	78/99	79/99	79/100	80/101	80/102	82/104		

Reference conditions: Inlet pressure: 1.013 bar(a) - Inlet temperature: 20°C dry air

Technical data

ZL 650



Q [m³/h]: capacity of blower aggregate
 T [°C]: temperature on the discharge blower flange
 Pe [kW]: blower input
 Pm [kW]: motor load
 n [rpm]: blower speed
 LmA [dB]: level of acoustic pressure with and without noise enclosure

Δp mbar	ZL 650											
	A	B	C	D	E	F	G	H	I	J	K	
300	Q [m³/h]	264	312	362	413	469	499	530	551	584	625	664
	T [°C]	51	50	50	49	49	49	49	49	49	49	49
	Pe [kW]	3	3.4	4	4.4	5	5.3	5.6	5.9	6.2	6.7	7.2
	Pm [kW]	4	5.5	5.5	5.5	7.5	7.5	7.5	7.5	7.5	11	11
	element rpm	2256	2581	2925	3269	3654	3861	4068	4217	4439	4722	4989
	LmA [dB]	71/92	71/92	72/92	73/93	74/94	74/94	76/95	77/97	77/98	80/100	81/102
	400	Q [m³/h]	258	304	355	406	463	493	524	546	578	617
T [°C]		63	61	60	60	59	59	59	59	59	59	59
Pe [kW]		4	4.5	5.2	5.8	6.6	7	7.4	7.7	8.2	8.7	9.3
Pm [kW]		5.5	5.5	7.5	7.5	11	11	11	11	11	11	11
element rpm		2271	2581	2930	3275	3666	3874	4081	4232	4455	4722	4989
LmA [dB]		71/92	71/92	72/92	73/93	73/94	75/95	76/96	77/97	78/98	81/101	82/102
500		Q [m³/h]	252	297	348	400	456	487	517	539	572	611
	T [°C]	75	73	71	70	69	69	69	69	68	68	68
	Pe [kW]	5	5.6	6.4	7.3	8.1	8.6	9.1	9.5	10.1	10.7	11.4
	Pm [kW]	7.5	7.5	7.5	11	11	11	11	11	15	15	15
	element rpm	2275	2585	2930	3286	3666	3874	4081	4232	4455	4722	4989
	LmA [dB]	72/93	73/94	73/94	74/95	74/95	76/97	78/98	79/99	80/100	82/102	83/103
	600	Q [m³/h]	245	293	344	395	450	481	511	533	566	605
T [°C]		87	84	82	81	79	79	79	79	78	78	78
Pe [kW]		6	6.8	7.7	8.7	9.7	10.3	10.9	11.3	12	12.7	13.5
Pm [kW]		7.5	11	11	11	15	15	15	15	15	15	18.5
element rpm		2275	2594	2940	3286	3666	3874	4081	4232	4455	4722	4989
LmA [dB]		73/95	74/95	75/96	76/96	77/97	77/98	78/98	79/99	80/101	82/101	83/103
700		Q [m³/h]	241	287	339	390	445	476	506	529	561	600
	T [°C]	100	96	93	91	90	90	89	89	88	88	87
	Pe [kW]	7	7.9	9	10.1	11.3	12	12.6	13.1	13.9	14.8	15.7
	Pm [kW]	11	11	11	15	15	15	15	18.5	18.5	18.5	18.5
	element rpm	2283	2594	2940	3286	3666	3874	4081	4232	4455	4722	4989
	LmA [dB]	75/96	76/96	76/97	77/97	77/98	78/98	79/99	80/100	81/101	82/102	84/104
	800	Q [m³/h]	237	283	334	385	441	472	502	524	557	597
T [°C]		113	108	105	102	101	101	99	99	98	97	97
Pe [kW]		7.9	9	10.2	11.5	12.8	13.6	14.4	14.9	15.8	16.8	17.9
Pm [kW]		11	11	15	15	15	18.5	18.5	18.5	18.5	22	22
element rpm		2283	2594	2940	3286	3666	3874	4081	4232	4455	4730	4998
LmA [dB]		75/96	76/97	77/97	78/98	78/99	79/99	80/100	81/101	82/103	83/104	84/105
900		Q [m³/h]	233	279	330	381	437	468	499	522	554	594
	T [°C]	126	121	116	114	111	111	109	110	108	107	
	Pe [kW]	8.9	10.1	11.5	12.9	14.4	15.3	16.2	16.8	17.7	18.9	
	Pm [kW]	11	15	15	15	18.5	18.5	22	22	22	22	
	element rpm	2283	2594	2940	3286	3666	3874	4088	4239	4462	4730	
	LmA [dB]	76/97	77/98	78/98	78/99	79/100	80/101	81/102	82/103	82/104	84/105	

Reference conditions: Inlet pressure: 1.013 bar(a) - Inlet temperature: 20°C dry air

Technical data

ZL 700 - 1000



Q [m³/h]: capacity of blower aggregate

T [°C]: temperature on the discharge blower flange

Pe [kW]: blower input

Pm [kW]: motor load

n [rpm]: blower speed

LmA [dB]: level of acoustic pressure with and without noise enclosure

Δp mbar	ZL 700						ZL 1000					
	A	B	C	D	E	F	G	H	I	J	K	
300	Q [m³/h]	482	558	598	635	673	719	777	829	880	953	1011
	T [°C]	51	51	51	51	51	51	49	49	49	49	49
	Pe [kW]	5.4	6.2	6.7	7.1	7.6	8.1	8.3	8.9	9.4	10.3	11
	Pm [kW]	7.5	7.5	11	11	11	11	11	11	11	15	15
	element rpm	2585	2930	3118	3285	3459	3666	3920	4155	4390	4722	4989
	LmA [dB]	67/ 88	68/ 90	69/91	69/ 91	70/92	70/ 92	71/92	71/92	72/93	73/94	74/95
400	Q [m³/h]	474	550	588	626	664	709	767	819	870	943	1002
	T [°C]	62	61	61	61	61	61	59	58	58	58	58
	Pe [kW]	7.1	8.1	8.7	9.2	9.8	10.5	10.8	11.5	12.3	13.3	14.2
	Pm [kW]	11	11	11	11	15	15	15	15	15	18.5	18.5
	element rpm	2594	2940	3113	3286	3459	3666	3920	4155	4390	4722	4989
	LmA [dB]	67/ 89	68/ 91	70/92	70/ 93	71/93	71/ 93	72/94	72/94	73/95	74/95	75/96
500	Q [m³/h]	465	541	579	617	655	701	759	810	862	937	995
	T [°C]	73	72	72	71	71	71	68	68	68	68	68
	Pe [kW]	8.8	10	10.7	11.3	12	12.8	13.3	14.2	15.1	16.4	17.5
	Pm [kW]	11	15	15	15	15	15	18.5	18.5	18.5	22	22
	element rpm	2594	2940	3113	3286	3459	3666	3920	4155	4390	4730	4998
	LmA [dB]	68/ 91	69/ 93	70/94	71/ 94	71/95	72/ 95	73/95	73/95	74/96	75/96	75/97
600	Q [m³/h]	458	534	572	610	648	694	752	805	857	931	990
	T [°C]	84	83	82	82	81	81	78	78	77	77	77
	Pe [kW]	10.4	11.9	12.5	13.4	14.2	15.1	15.9	16.9	18	19.5	20.7
	Pm [kW]	15	15	15	18.5	18.5	18.5	18.5	22	22	30	30
	element rpm	2594	2940	3113	3286	3459	3666	3920	4162	4398	4738	5006
	LmA [dB]	68/ 92	69/ 93	71/95	71/ 95	72/95	73/ 95	74/96	74/96	75/96	76/96	76/97
700	Q [m³/h]	452	528	566	604	643	689	747	800	852	925	984
	T [°C]	95	94	93	92	92	91	88	87	87	87	87
	Pe [kW]	12.1	13.8	14.7	15.5	16.5	17.5	18.5	19.7	20.9	22.6	24
	Pm [kW]	15	18.5	18.5	18.5	22	22	22	30	30	30	30
	element rpm	2594	2940	3113	3286	3465	3673	3927	4169	4405	4738	5006
	LmA [dB]	68/ 92	69/ 93	71/95	71/ 95	72/96	73/ 96	73/96	74/96	75/97	76/97	76/98
800	Q [m³/h]	446	522	562	600	638	685	743	795	847	920	979
	T [°C]	107	105	104	103	102	102	98	97	97	96	96
	Pe [kW]	13.8	15.7	16.7	17.7	18.7	20	21.1	22.4	23.8	25.7	27.3
	Pm [kW]	18.5	18.5	22	22	22	30	30	30	30	30	37
	element rpm	2594	2940	3118	3291	3465	3679	3933	4169	4405	4738	5006
	LmA [dB]	69/93	70/94	71/95	72/96	72/96	73/96	74/96	74/97	75/97	77/98	78/98
900	Q [m³/h]	441	519	557	596	635	680	728	774	842	894	974
	T [°C]	119	116	115	114	113	112	108	107	107	106	106
	Pe [kW]	15.4	17.6	18.7	19.9	21	22.3	23.3	24.7	26.6	28.2	30.6
	Pm [kW]	18.5	22	22	30	30	30	30	30	37	37	37
	element rpm	2594	2945	3118	3297	3471	3679	3887	4095	4405	4641	5006
	LmA [dB]	69/93	70/94	71/95	72/96	73/96	74/97	74/97	75/97	76/98	77/99	78/100
1000	Q [m³/h]	438	516	554	592	631	676	724	769	838	890	971
	T [°C]	130	127	126	124	123	122	118	118	117	116	117
	Pe [kW]	17.1	19.6	20.8	22	23.2	24.7	25.9	27.3	29.5	31.2	34
	Pm [kW]	22	30	30	30	30	30	30	37	37	37	45
	element rpm	2599	2950	3124	3297	3471	3679	3887	4095	4405	4641	5015
	LmA [dB]	70/94	72/96	72/96	73/97	73/97	74/97	75/97	76/97	77/98	78/99	79/101

Reference conditions: Inlet pressure: 1.013 bar(a) - Inlet temperature: 20°C dry air

Technical data

ZL 1200



Q [m³/h]: capacity of blower aggregate
 T [°C]: temperature on the discharge blower flange
 Pe [kW]: blower input
 Pm [kW]: motor load
 n [rpm]: blower speed
 LmA [dB]: level of acoustic pressure with and without noise enclosure

Δp mbar	ZL 1200											
	A	B	C	D	E	F	G	H	I	J	K	
300	Q [m³/h]	654	699	742	787	840	893	952	1007	1069	1138	1215
	T [°C]	50	50	50	50	49	50	50	50	50	51	51
	Pe [kW]	7.1	8	8	8.5	9.1	9.7	10.4	11.3	12	12.6	13.5
	Pm [kW]	11	11	11	11	11	15	15	15	15	15	18.5
	element rpm	2634	2791	2940	3098	3282	3467	3675	3868	4081	4324	4594
	LmA [dB]	66/91	66/90	67/91	68/92	70/93	70/93	71/93	72/94	73/95	72/96	74/96
	400	Q [m³/h]	641	687	730	775	828	881	940	996	1057	1128
T [°C]		61	61	61	60	60	60	60	60	60	60	60
Pe [kW]		9.3	10	10.5	11.1	11.8	12.6	13.5	14.6	15.4	16.3	17.3
Pm [kW]		11	15	15	15	15	15	18.5	18.5	18.5	22	22
element rpm		2634	2791	2940	3098	3282	3467	3675	3868	4083	4331	4602
LmA [dB]		68/92	68/92	68/93	69/94	70/94	71/94	71/95	72/96	73/96	72/96	74/97
500		Q [m³/h]	631	676	719	765	818	871	932	988	1052	1121
	T [°C]	71	71	71	71	70	70	70	70	70	70	70
	Pe [kW]	11.5	12.3	13	13.7	14.6	15.6	16.6	17.9	19	20	21.2
	Pm [kW]	15	15	18.5	18.5	18.5	18.5	22	22	22	30	30
	element rpm	2634	2791	2940	3095	3282	3467	3681	3875	4097	4338	4609
	LmA [dB]	68/92	68/93	69/93	70/94	71/94	71/95	72/95	73/95	74/95	74/96	75/96
	600	Q [m³/h]	622	688	711	757	810	864	926	982	1043	1113
T [°C]		83	81	81	81	80	80	80	79	79	79	79
Pe [kW]		13.8	14.7	15.5	16.3	17.4	18.4	19.7	21.2	22.5	23.6	25
Pm [kW]		18.5	18.5	18.5	22	22	22	30	30	30	30	30
element rpm		2634	2791	2940	3103	3287	3473	3688	3882	4097	4338	4609
LmA [dB]		68/93	69/93	69/93	70/94	71/95	72/95	72/96	74/96	75/97	75/97	76/97
700		Q [m³/h]	616	661	705	752	805	858	919	974	1036	1105
	T [°C]	94	92	92	91	91	90	90	89	89	89	89
	Pe [kW]	16	17	18	19	20.2	21.5	22.8	24.1	26	27.3	29.2
	Pm [kW]	22	22	22	22	30	30	30	30	30	37	37
	element rpm	2639	2795	2945	3108	3292	3479	3688	3882	4097	4338	4609
	LmA [dB]	69/93	69/93	70/95	70/95	71/95	72/96	73/96	74/96	75/97	75/97	75/97
	800	Q [m³/h]	611	656	700	745	798	852	912	968	1030	1099
T [°C]		105	103	103	102	101	100	100	99	99	99	98
Pe [kW]		18.2	19.4	20.5	21.6	23	24.4	25.9	27.9	29.5	31	33.2
Pm [kW]		22	30	30	30	30	30	37	37	37	37	45
element rpm		2643	2800	2950	3108	3292	3479	3688	3882	4097	4338	4617
LmA [dB]		70/94	69/93	70/94	71/95	72/96	73/96	73/97	74/98	75/98	75/98	75/98
900		Q [m³/h]	605	651	694	740	793	847	907	963	1025	1095
	T [°C]	116	114	114	113	112	110	110	109	109	108	108
	Pe [kW]	20.4	21.8	23	24.2	26	27.4	30	31.2	32.6	34.7	37.1
	Pm [kW]	30	30	30	30	30	37	37	37	45	45	45
	element rpm	2643	2800	2950	3108	3292	3479	3688	3882	4104	4346	4617
	LmA [dB]	70/93	70/94	71/94	72/95	73/96	73/96	74/96	75/97	76/99	76/99	76/99
	1000	Q [m³/h]	601	646	689	735	788	842	903	959	1021	1090
T [°C]		127	125	124	123	121	121	120	120	119	118	
Pe [kW]		22.6	24.2	25.5	26.8	28.6	30.3	32.3	34.1	36.1	38.5	
Pm [kW]		30	30	30	37	37	37	45	45	45	45	
element rpm		2643	2800	2950	3108	3292	3479	3694	3888	4104	4346	
LmA [dB]		72/96	72/96	72/96	73/96	74/97	74/97	75/98	76/99	77/100	77/100	

Reference conditions: Inlet pressure: 1.013 bar(a) - Inlet temperature: 20°C dry air

Technical data

ZL 1400



Q [m³/h]: capacity of blower aggregate

T [°C]: temperature on the discharge blower flange

Pe [kW]: blower input

Pm [kW]: motor load

n [rpm]: blower speed

LmA [dB]: level of acoustic pressure with and without noise enclosure

Δp mbar	ZL 1400											
	A	B	C	D	E	F	G	H	I	J	K	
300	Q [m³/h]	707	753	809	897	961	1022	1084	1157	1231	1304	1390
	T [°C]	51	50	50	50	49	49	49	49	49	49	49
	Pe [kW]	7.7	8.2	8.7	9.6	10.2	10.7	11.3	12.1	12.8	13.6	14.4
	Pm [kW]	11	11	11	15	15	15	15	15	15	18.5	18.5
	element rpm	1629	1718	1817	1993	2117	2234	2363	2499	2634	2775	2940
	LmA [dB]	72/90	73/91	74/92	75/92	75/93	76/93	76/94	77/94	77/95	77/96	78/97
	400	Q [m³/h]	689	768	788	880	944	1005	1073	1143	1216	1293
T [°C]		62	61	61	60	60	59	59	59	59	58	58
Pe [kW]		10.2	10.9	11.5	12.7	13.4	14.2	14.9	15.9	16.9	17.9	19
Pm [kW]		15	15	15	15	18.5	18.5	18.5	18.5	22	22	22
element rpm		1629	1718	1817	1993	2117	2234	2363	2499	2639	2785	2945
LmA [dB]		74/91	75/92	75/92	76/93	76/94	77/94	77/95	77/95	77/96	77/96	78/98
500		Q [m³/h]	675	727	776	867	932	992	1061	1131	1205	1279
	T [°C]	73	72	71	71	70	70	69	69	68	68	68
	Pe [kW]	12.7	13.5	14.3	15.8	16.6	17.6	18.6	19.8	20.9	22.2	23.5
	Pm [kW]	15	18.5	18.5	18.5	22	22	22	30	30	30	30
	element rpm	1629	1728	1823	1997	2120	2235	2367	2502	2643	2785	2950
	LmA [dB]	75/92	75/92	76/93	76/94	77/94	77/95	77/95	77/96	77/96	78/98	78/99
	600	Q [m³/h]	666	715	764	857	922	982	1045	1119	1193	1267
T [°C]		84	83	83	82	81	80	79	79	78	78	78
Pe [kW]		15.3	16.2	17.1	18.8	19.9	21.1	22.2	23.7	25	26.4	28
Pm [kW]		18.5	22	22	22	30	30	30	30	30	37	37
element rpm		1635	1728	1823	2000	2124	2239	2360	2502	2643	2785	2950
LmA [dB]		75/93	76/93	76/94	77/95	77/95	77/96	78/96	78/97	78/97	78/99	79/100
700		Q [m³/h]	656	704	758	850	912	972	1035	1109	1183	1257
	T [°C]	96	95	94	92	91	91	90	89	89	88	88
	Pe [kW]	17.7	18.8	19.9	21.9	23.2	24.5	25.8	27.5	29.1	30.7	32.7
	Pm [kW]	22	22	30	30	30	30	30	37	37	37	45
	element rpm	1635	1728	1831	2006	2124	2242	2360	2502	2643	2785	2955
	LmA [dB]	76/93	76/94	77/95	77/95	77/96	78/96	78/97	78/97	78/97	78/99	79/100
	800	Q [m³/h]	647	696	750	841	903	963	1027	1101	1175	1250
T [°C]		108	107	105	103	102	101	100	99	99	99	98
Pe [kW]		20.2	21.5	22.7	25	26.4	27.9	29.5	31.3	33.2	35.1	37.3
Pm [kW]		30	30	30	30	37	37	37	37	45	45	45
element rpm		1635	1728	1831	2006	2124	2242	2360	2502	2648	2790	2955
LmA [dB]		76/94	77/95	77/95	77/96	78/96	78/97	78/97	78/97	78/99	79/100	80/101
900		Q [m³/h]	640	688	742	834	896	956	1020	1094	1168	1242
	T [°C]	120	118	117	114	113	112	112	111	110	109	
	Pe [kW]	22.8	24.1	25.5	28	29.7	31.4	33.2	35.3	37.3	39.4	
	Pm [kW]	30	30	30	37	37	37	45	45	45	45	
	element rpm	1635	1728	1831	2006	2124	2242	2364	2506	2648	2790	
	LmA [dB]	77/95	77/95	77/96	78/96	78/97	78/97	78/97	78/99	79/100	80/101	
	1000	Q [m³/h]	634	682	736	828	890	952	1014	1088		
T [°C]		132	130	128	126	125	123	122	121			
Pe [kW]		25.3	26.8	28.3	31.1	33.1	35	36.8	39.1			
Pm [kW]		30	37	37	37	45	45	45	45			
element rpm		1635	1728	1831	2006	2128	2246	2364	2506			
LmA [dB]		77/95	77/96	78/96	78/97	78/97	78/97	78/99	79/100			

Reference conditions: Inlet pressure: 1.013 bar(a) - Inlet temperature: 20°C dry air

Technical data

ZL 1600 - 2000



Q [m³/h]: capacity of blower aggregate
 T [°C]: temperature on the discharge blower flange
 Pe [kW]: blower input
 Pm [kW]: motor load
 n [rpm]: blower speed
 LmA [dB]: level of acoustic pressure with and without noise enclosure

Δp mbar	ZL 1600											ZL 2000		
	A	B	C	D	E	F	G	H	I	J	K	L	M	
300	Q [m³/h]	997	1070	1143	1220	1292	1380	1467	1569	1662	1759	1883	1991	2128
	T [°C]	50	50	50	49	49	49	49	49	49	49	49	49	49
	Pe [kW]	10.8	11.5	12.2	12.9	13.7	14.5	15.4	16.5	17.5	18.5	19.8	21.2	22.7
	Pm [kW]	15	15	15	15	18.5	18.5	18.5	22	22	22	30	30	30
	element rpm	1880	1985	2107	2231	2358	2489	2630	2795	2945	3103	3304	3479	3688
	LmA [dB]	74/91	75/92	75/92	76/93	76/94	77/94	77/95	77/95	77/96	77/96	78/98	78/99	79/100
400	Q [m³/h]	981	1055	1132	1203	1285	1369	1460	1553	1646	1744	1865	1973	2103
	T [°C]	61	60	60	60	59	59	59	59	59	58	58	58	58
	Pe [kW]	14.2	15.1	16.1	17	18	19.1	20.3	21.6	22.9	24.1	25.8	27.5	29.5
	Pm [kW]	18.5	18.5	22	22	22	30	30	30	30	30	30	37	37
	element rpm	1887	1992	2121	2235	2367	2502	2650	2800	2950	3108	3304	3479	3688
	LmA [dB]	74/92	75/93	76/93	76/94	77/95	77/95	77/96	78/96	78/97	78/97	78/99	79/100	80/101
500	Q [m³/h]	975	1040	1118	1191	1265	1353	1445	1538	1631	1729	1850	1963	2091
	T [°C]	71	70	70	70	69	69	69	68	68	68	68	68	68
	Pe [kW]	17.8	18.8	20	21.2	22.3	23.7	25.2	26.7	28.3	29.9	31.8	34	36.5
	Pm [kW]	22	22	30	30	30	30	30	37	37	37	37	45	45
	element rpm	1893	1998	2124	2242	2360	2502	2650	2800	2950	3108	3304	3487	3694
	LmA [dB]	74/92	75/93	76/93	76/94	77/95	77/95	77/96	78/96	78/97	78/97	78/99	79/100	80/101
600	Q [m³/h]	963	1029	1105	1178	1251	1340	1432	1525	1620	1724	1829	1958	2072
	T [°C]	82	81	81	80	79	79	79	78	78	77	77	77	77
	Pe [kW]	21.2	22.5	23.9	25.2	26.6	28.2	30	31.8	33.7	35.7	37.8	41.5	43
	Pm [kW]	30	30	30	30	37	37	37	37	45	45	45	55	55
	element rpm	1896	2002	2124	2242	2360	2502	2650	2800	2955	3122	3290	3499	3683
	LmA [dB]	75/93	75/94	76/94	76/95	77/96	77/96	77/97	78/97	78/98	79/98	79/100	80/101	81/102
700	Q [m³/h]	952	1018	1094	1167	1240	1330	1423	1512	1610	1725	1837	1947	
	T [°C]	93	92	91	90	90	90	89	88	88	87	87	87	
	Pe [kW]	24.7	26.1	27.7	29.3	30.9	32.8	34.9	36.9	39	41.7	44.2	47.1	
	Pm [kW]	30	37	37	37	37	45	45	45	45	55	55	55	
	element rpm	1896	2002	2124	2242	2360	2504	2654	2797	2955	3141	3321	3499	
	LmA [dB]	75/94	76/94	76/95	77/96	77/96	77/97	78/97	78/98	79/98	79/100	80/101	81/102	
800	Q [m³/h]	942	1008	1084	1160	1233	1321	1414	1504	1606	1715			
	T [°C]	104	103	102	101	100	99	99	98	98	97			
	Pe [kW]	28.1	29.7	31.6	33.4	35.3	37.4	39.7	42	44.6	47.4			
	Pm [kW]	37	37	37	45	45	45	45	55	55	55			
	element rpm	1896	2002	2124	2246	2364	2504	2654	2799	2965	3140			
	LmA [dB]	76/95	77/96	77/96	77/97	78/97	78/98	79/98	79/100	80/101	81/102			
900	Q [m³/h]	934	1004	1080	1152	1225	1318	1416						
	T [°C]	115	114	113	111	110	109	109						
	Pe [kW]	31.6	33.4	35.5	37.6	39.6	42.1	44.5						
	Pm [kW]	37	45	45	45	45	55	55						
	element rpm	1896	2007	2129	2246	2364	2513	2647						
	LmA [dB]	77/96	77/97	78/97	78/98	79/98	79/100	80/101						
1000	Q [m³/h]	928	997	1061	1144	1223								
	T [°C]	127	125	124	122	121								
	Pe [kW]	35	37.1	39.1	41.7	44.1								
	Pm [kW]	45	45	45	55	55								
	element rpm	1896	2007	2119	2261	2387								
	LmA [dB]	78/97	78/98	79/98	79/100	80/101								

Reference conditions: Inlet pressure: 1.013 bar(a) - Inlet temperature: 20°C dry air

Technical data

ZL 2500 - 3000



Q [m³/h]: capacity of blower aggregate

T [°C]: temperature on the discharge blower flange

Pe [kW]: blower input

Pm [kW]: motor load

n [rpm]: blower speed

LmA [dB]: level of acoustic pressure with and without noise enclosure

Δp mbar	ZL 2500							ZL 3000				
	A	B	C	D	E	F	G	H	I	J	K	
300	Q [m³/h]	1427	1626	1923	2049	2183	2314	2451	2612	2772	2940	3126
	T [°C]	50	50	50	50	50	50	49	49	49	49	49
	Pe [kW]	15.8	18	20.9	22.2	23.7	25.1	26.7	28.6	30.5	32.5	34.8
	Pm [kW]	18.5	22	30	30	30	30	37	37	37	45	45
	element rpm	1460	1635	1896	2006	2124	2239	2360	2501	2643	2790	2955
	LmA [dB]	73/95	74/96	75/97	76/98	76/98	77/99	77/99	77/98	78/99	79/100	80/100
400	Q [m³/h]	1405	1599	1897	2022	2156	2305	2429	2631	2752	2925	3113
	T [°C]	60	59	59	59	59	59	58	60	58	60	58
	Pe [kW]	20.8	23	27.3	28.9	30.8	32.9	34.7	37.6	39.4	42	44.9
	Pm [kW]	30	30	37	37	37	45	45	45	45	55	55
	element rpm	1465	1635	1896	2006	2124	2254	2364	2541	2648	2799	2965
	LmA [dB]	71/95	75/97	76/98	76/98	77/99	77/99	78/100	78/99	78/100	79/101	81/102
500	Q [m³/h]	1383	1585	1879	2012	2120	2279	2435	2620	2730	2915	3103
	T [°C]	71	71	70	70	69	69	69	69	67	69	67
	Pe [kW]	25.7	29	33.7	35.9	37.7	40.4	43	46.3	48.3	51.6	55
	Pm [kW]	30	37	45	45	45	55	55	55	55	75	75
	element rpm	1465	1642	1900	2016	2128	2250	2387	2550	2657	2809	2975
	LmA [dB]	74/96	75/97	76/98	77/99	76/99	78/100	79/101	79/100	79/101	81/102	82/103
600	Q [m³/h]	1375	1567	1859	1994	2129	2264	2404	2549	2722	2897	3086
	T [°C]	81	81	80	80	79	79	79	79	77	78	76
	Pe [kW]	30.8	34.4	40	42.6	45.3	48	50.8	53.8	57.3	61.1	65
	Pm [kW]	37	45	55	55	55	55	75	75	75	75	75
	element rpm	1475	1642	1898	2016	2135	2253	2376	2503	2656	2809	2975
	LmA [dB]	74/96	76/98	77/99	77/99	78/100	78/100	78/100	79/101	80/101	81/102	82/104
700	Q [m³/h]	1360	1577	1853	1977	2098	2244	2389	2534	2707	2883	
	T [°C]	92	90	90	90	89	89	88	88	87	88	
	Pe [kW]	35.8	41	46.6	49.4	52.1	55.5	58.8	62.2	66.4	70.6	
	Pm [kW]	45	55	55	75	75	75	75	75	75	90	
	element rpm	1475	1658	1906	2015	2121	2249	2376	2503	2656	2809	
	LmA [dB]	75/97	76/98	77/99	76/98	77/99	77/99	78/100	79/101	80/102	81/102	
800	Q [m³/h]	1352	1565	1816	1946	2075	2204	2355	2557	2681		
	T [°C]	104	103	101	100	99	99	98	98	97		
	Pe [kW]	40.9	46.1	52.4	55.7	59	62.4	66.3	70.9	75		
	Pm [kW]	55	55	75	75	75	75	75	90	90		
	element rpm	1480	1665	1885	1999	2112	2225	2357	2508	2644		
	LmA [dB]	75/97	77/99	76/98	77/99	77/99	78/100	79/101	80/102	80/102		
900	Q [m³/h]	1341	1556	1805	1935	2064	2198					
	T [°C]	115	113	111	110	109	109					
	Pe [kW]	45.9	51.8	58.8	62.5	66.2	70					
	Pm [kW]	55	75	75	75	75	90					
	element rpm	1480	1667	1885	1999	2112	2229					
	LmA [dB]	75/97	76/98	77/99	78/100	78/100	79/101					
1000	Q [m³/h]	1334	1552	1801	1930							
	T [°C]	127	124	121	120							
	Pe [kW]	50.8	57.5	65.3	69.4							
	Pm [kW]	75	75	75	90							
	element rpm	1480	1684	1889	2002							
	LmA [dB]	76/98	77/99	78/100	78/100							

Reference conditions: Inlet pressure: 1.013 bar(a) - Inlet temperature: 20°C dry air

Technical data

ZL 3400 - 4700



Q [m³/h]: capacity of blower aggregate
 T [°C]: temperature on the discharge blower flange
 Pe [kW]: blower input
 Pm [kW]: motor load
 n [rpm]: blower speed
 LmA [dB]: level of acoustic pressure with and without noise enclosure

Δp mbar	ZL 3400										ZL 4700				
	A	B	C	D	E	F	G	H	I	J	K	L	M	N	
300	Q [m³/h]		2500	2648	2800	3004	3247	3442	3694	3934	4184	4445	4790	5108	5750
	T [°C]		50	50	50	50	50	50	50	50	50	50	50	51	51
	Pe [kW]		28	29.5	30.1	35	36	38	41	43	47	50	54	57.7	66.3
	Pm [kW]		37	37	37	45	45	45	55	55	55	75	75	75	75
	element rpm		1404	1475	1548	1651	1764	1860	1980	2096	2217	2343	2509	2664	2975
	LmA [dB]		73/94	73/94	74/95	75/95	76/96	76/97	77/97	78/99	79/103	81/101	81/106	82/107	83/108
400	Q [m³/h]		2453	2596	2763	2970	3211	3379	3605	3860	4146	4398	4740	5062	5716
	T [°C]		61	61	61	60	60	60	60	60	60	60	60	60	60
	Pe [kW]		37	38	41	45	47	49	53	56	60	64	69	73.9	84.7
	Pm [kW]		45	45	55	55	55	75	75	75	75	75	90	90	110
	element rpm		1404	1475	1554	1657	1770	1851	1960	2083	2221	2343	2514	2664	2980
	LmA [dB]		74/96	74/96	75/97	76/97	77/97	77/98	78/99	79/100	82/105	81/103	84/106	85/105	86/106
500	Q [m³/h]		2422	2567	2737	2952	3147	3338	3565	3820	4106	4359	4699	5032	5678
	T [°C]		72	71	71	70	70	70	70	70	70	70	69	69	69
	Pe [kW]		45	48	52	54	59	61	64	69	74	78	84	90.5	103
	Pm [kW]		55	55	75	75	75	75	75	90	90	90	110	110	132
	element rpm		1409	1480	1564	1665	1762	1851	1960	2083	2221	2343	2507	2668	2980
	LmA [dB]		75/98	75/98	76/98	77/99	78/99	78/102	79/101	80/102	81/104	82/105	84/107	85/107	85/108
600	Q [m³/h]		2372	2531	2703	2917	3126	3303	3530	3783	4078	4340	4665	4999	
	T [°C]		82	82	82	81	80	80	80	80	79	79	79	79	
	Pe [kW]		54	57	61	65	70	72	77	81	87	93	100	106.9	
	Pm [kW]		75	75	75	75	90	90	90	90	110	110	110	132	
	element rpm		1405	1480	1564	1665	1768	1851	1960	2082	2224	2350	2507	2668	
	LmA [dB]		76/99	76/99	77/100	78/100	79/101	79/102	80/103	81/104	82/105	83/106	85/107	86/107	
700	Q [m³/h]		2333	2510	2673	2882	3101	3288	3506	3762	4049	4310	4636		
	T [°C]		93	93	92	92	91	91	90	90	89	89	88		
	Pe [kW]		63	66	71	76	80	83	95	94	101	107	115		
	Pm [kW]		75	90	90	90	90	110	110	110	132	132	132		
	element rpm		1405	1485	1564	1665	1768	1858	1963	2086	2224	2350	2507		
	LmA [dB]		77/101	77/102	78/101	79/102	79/103	80/103	82/106	82/106	83/106	84/107	86/107		
800	Q [m³/h]		2315	2483	2657	2853	3068	3261	3528	3736	4023				
	T [°C]		105	104	103	102	102	101	101	100	99				
	Pe [kW]		72	75	80	84	90	95	101	107	115				
	Pm [kW]		90	90	90	110	110	110	132	132	132				
	element rpm		1405	1485	1569	1662	1765	1858	1986	2086	2224				
	LmA [dB]		77/101	77/101	78/102	79/102	80/103	81/104	81/105	82/106	83/107				
900	Q [m³/h]	1955	2110	2292	2460	2634	2850	3007	3238	3505					
	T [°C]	121	119	116	115	115	112	112	111	111					
	Pe [kW]	70	74	80	84	89	95	101	108	113					
	Pm [kW]	90	90	90	110	110	110	132	132	132					
	element rpm	1243	1318	1405	1485	1568	1673	1778	1882	1986					
	LmA [dB]	77/99	78/100	78/101	78/102	78/102	79/103	80/103	81/104	82/105					
1000	Q [m³/h]	1934	2089	2277	2437	2614	2830	2987	3218						
	T [°C]	133	131	127.5	126	126	123	123	122						
	Pe [kW]	78	82	88	93	99	106	110	118						
	Pm [kW]	90	110	110	110	110	132	132	132						
	element rpm	1243	1318	1407	1485	1568	1673	1747	1858						
	LmA [dB]	78/100	78/101	78/102	79/103	80/103	81/103	80/103	84/107						

Reference conditions: Inlet pressure: 1.013 bar(a) - Inlet temperature: 20°C dry air

Technical data

ZL 5000 - 5300



Q [m³/h]: capacity of blower aggregate

T [°C]: temperature on the discharge blower flange

Pe [kW]: blower input

Pm [kW]: motor load

n [rpm]: blower speed

LmA [dB]: level of acoustic pressure with and without noise enclosure

Δp mbar	ZL 5000											ZL 5300			
	A	B	C	D	E	F	G	H	I	J	K	L	M	N	
300	Q [m³/h]	2966	3140	3373	3605	3838	4128	4436	4731	5061	5388	6097	6509	6978	
	T [°C]	51	50	50	50	50	50	50	50	50	50	49.3	49	49	
	Pe [kW]	32.9	34.6	36.9	39.2	41.6	44.5	47.8	50.9	54.4	58	61.5	65	69	74
	Pm [kW]	45	45	45	45	55	55	55	75	75	75	75	90	90	90
	element rpm	1106	1161	1235	1309	1383	1475	1573	1677	1772	1876	1973	2100	2231	2380
	LmA [dB]	73/94	73/94	74/95	74/95	75/96	76/97	77/97	77/98	78/99	78/100	80/100	80/100	80/100	80/100
400	Q [m³/h]	2902	3076	3309	3555	3788	4081	4393	4701	5000	5327	5629	6045	6461	6930
	T [°C]	61	61	61	60	60	60	59	59	59	59	58.8	58	58	58
	Pe [kW]	43.1	45.3	48.3	51.5	54.6	58.5	62.6	66.8	70.9	75.5	80	84	89.8	96.4
	Pm [kW]	55	55	55	75	75	75	75	90	90	90	90	110	110	110
	element rpm	1106	1161	1235	1313	1388	1480	1579	1677	1772	1876	1976	2103	2235	2384
	LmA [dB]	74/95	74/96	75/97	75/97	76/97	77/97	78/98	78/99	79/100	80/100	81/104	81/104	81/104	81/104
500	Q [m³/h]	2861	3038	3272	3502	3739	4029	4341	4668	4967	5295	5590	5994	6409	6879
	T [°C]	72	72	71	71	70	70	69	69	69	69	68.1	68	67	67
	Pe [kW]	53.6	56.4	60.1	63.7	67.6	72.3	76.7	82.8	86.8	93.4	98.5	103.8	110.9	119
	Pm [kW]	75	75	75	75	90	90	90	110	110	110	132	132	132	132
	element rpm	1110	1166	1240	1313	1388	1480	1579	1683	1778	1882	1976	2103	2235	2384
	LmA [dB]	75/97	75/98	76/98	76/99	77/99	78/99	79/100	79/101	80/102	80/103	82/105	82/105	82/105	82/105
600	Q [m³/h]	2814	2992	3226	3456	3693	3983	4296	4623	4923	5250	5546	5949	6365	6835
	T [°C]	83	83	82	81	81	80	80	79	79	78	78	77	77	77
	Pe [kW]	63.9	67.2	71.6	76	80.5	86.1	91.8	98.6	103.6	111.1	117.5	123.8	132.1	141.7
	Pm [kW]	75	90	90	90	90	110	110	110	132	132	132	160	160	160
	element rpm	1110	1166	1240	1313	1388	1485	1584	1683	1778	1882	1976	2103	2235	2384
	LmA [dB]	76/99	76/99	77/100	77/100	78/100	79/101	80/102	80/103	81/104	81/105	84/107	84/107	84/107	84/107
700	Q [m³/h]	2774	2951	3198	3432	3666	3960	4256	4584	4886	5212	5508	5911	6327	6796
	T [°C]	95	94	93	92	91	90	90	89	89	88	87.9	87	86	86
	Pe [kW]	74.2	78.1	83.4	88.6	93.7	100.3	106.7	114.4	120.3	128.8	136	143.7	153.4	164.5
	Pm [kW]	90	90	110	110	110	132	132	132	160	160	160	200	200	200
	element rpm	1110	1166	1244	1318	1392	1485	1584	1683	1778	1882	1976	2103	2235	2384
	LmA [dB]	77/100	77/101	78/101	78/102	79/102	80/103	81/104	81/105	82/106	82/107	83/107	83/107	83/107	83/107
800	Q [m³/h]	2750	2925	3162	3397	3631	3925	4239	4550	4851	5190	5474	5877	6293	6762
	T [°C]	106	105	104	103	102	101	100	99	99	98	97.8	97	96	96
	Pe [kW]	84.9	89.2	95	100.9	106.7	114.2	121.6	130.2	137.1	146.9	154.5	163.7	174.8	187.4
	Pm [kW]	110	110	110	132	132	132	160	160	160	200	200	200	200	250
	element rpm	1114	1169	1244	1318	1392	1485	1584	1683	1778	1886	1976	2103	2235	2384
	LmA [dB]	77/101	77/101	78/102	79/102	79/103	80/103	81/104	81/105	82/106	82/107	84/108	84/108	84/108	84/108
900	Q [m³/h]	2718	2893	3131	3365	3600	3894	4208	4529	4830	5157	5444	5846		
	T [°C]	118	117	115	114	113	112	111	110	109	108	107.7	106		
	Pe [kW]	95.2	100.1	106.7	113.2	119.8	128.1	136.5	146.3	154.2	164.7	173.5	183.8		
	Pm [kW]	110	132	132	132	160	160	160	200	200	200	200	250		
	element rpm	1114	1169	1244	1318	1392	1485	1584	1686	1781	1885	1976	2103		
	LmA [dB]	77/101	77/101	78/102	79/102	80/103	81/104	81/104	82/105	82/106	82/107	85/110	85/110		
1000	Q [m³/h]	2691	2865	3103	3338	3572	3867	4190	4464	4704	5138	5417			
	T [°C]	130	128	126	125	124	122	121	120	119	118	117.6			
	Pe [kW]	105.6	111	118.3	125.5	132.8	142	151.7	162.2	168.7	181.8	192			
	Pm [kW]	132	132	132	160	160	160	200	200	200	200	250			
	element rpm	1114	1169	1244	1318	1392	1485	1587	1674	1750	1887	1976			
	LmA [dB]	77/101	78/102	78/102	79/103	80/103	81/104	81/104	82/105	82/106	82/106	85/110			

Reference conditions: Inlet pressure: 1.013 bar(a) - Inlet temperature: 20°C dry air

Technical data

ZL 8200



Q [m³/h]: capacity of blower aggregate
 T [°C]: temperature on the discharge blower flange
 Pe [kW]: blower input
 Pm [kW]: motor load
 n [rpm]: blower speed
 LmA [dB]: level of acoustic pressure with and without noise enclosure

Δp mbar	ZL 8200										
	A	B	C	D	E	F	G	H	I	J	
300	Q [m³/h]	4605	4873	5227	5581	5634	6374	6857	7343	7786	8312
	T [°C]	51	51	51	51	51	51	51	51	49	49
	Pe [kW]	51.2	54	57.8	61.6	65.6	70.5	73.4	82	83.4	89.3
	Pm [kW]	75	75	75	75	75	90	90	110	110	110
	element rpm	1110	1166	1240	1314	1388	1480	1579	1683	1773	1882
	LmA [dB]	74/95	74/95	75/96	76/97	76/98	77/98	78/99	79/99	79/100	80/101
400	Q [m³/h]	4520	4788	5143	5497	5871	6316	6798	7263	7751	8230
	T [°C]	61	61	61	60	60	60	60	60	58	58
	Pe [kW]	66.8	70.4	75.2	80.1	85.3	91.7	96.1	105.6	109.3	116.1
	Pm [kW]	90	90	90	90	110	110	110	132	132	132
	element rpm	1110	1166	1240	1314	1392	1485	1584	1683	1782	1882
	LmA [dB]	75/96	75/97	76/98	77/98	77/98	78/99	79/100	79/100	80/101	81/102
500	Q [m³/h]	4468	4732	5092	5447	5802	6247	6728	7200	7696	8176
	T [°C]	72	71	71	71	70	70	70	70	68	68
	Pe [kW]	82.8	87.1	93	99	105	112.7	118.6	129.5	134.9	143.2
	Pm [kW]	110	110	110	110	132	132	132	160	160	160
	element rpm	1114	1169	1244	1318	1392	1485	1584	1684	1786	1886
	LmA [dB]	76/98	76/99	77/99	78/100	78/100	79/101	80/101	80/102	81/103	82/104
600	Q [m³/h]	4407	4671	5032	5387	5742	6188	6639	7100	7556	8064
	T [°C]	82	82	81	81	80	80	78	78	77	77
	Pe [kW]	98.5	103.6	110.6	117.6	124.7	133.7	140.6	149.7	158.8	169.1
	Pm [kW]	110	132	132	132	160	160	160	200	200	200
	element rpm	1114	1169	1244	1318	1392	1485	1578	1674	1769	1875
	LmA [dB]	77/100	77/100	78/101	79/101	79/102	80/103	81/103	81/104	82/105	83/106
700	Q [m³/h]	4345	4711	5066	5427	5797	6152	6583	6948	7505	8014
	T [°C]	93	93	92	91	91	90	88	88	87	87
	Pe [kW]	114.1	122.2	130.2	138.4	146.9	155.1	163	171.3	184.1	196
	Pm [kW]	132	160	160	160	200	200	200	200	250	250
	element rpm	1112	1188	1262	1320	1414	1488	1577	1653	1769	1875
	LmA [dB]	78/101	78/102	79/103	80/103	80/104	81/104	82/105	82/105	83/106	84/108
800	Q [m³/h]	4299	4665	5036	5377	5752	6108	6514	7004	7460	
	T [°C]	105	103	102	102	101	100	98	97	97	
	Pe [kW]	129.8	139	148.5	157.2	167	176.2	187.6	197.6	209.5	
	Pm [kW]	160	160	200	200	200	200	250	250	250	
	element rpm	1112	1188	1265	1323	1414	1488	1572	1674	1769	
	LmA [dB]	78/102	78/102	79/103	80/103	81/104	81/104	82/105	82/106	83/107	

Reference conditions: Inlet pressure: 1.013 bar(a) - Inlet temperature: 20°C dry air

Technical data

ZL 10000



Q [m³/h]: capacity of blower aggregate

T [°C]: temperature on the discharge blower flange

Pe [kW]: blower input

Pm [kW]: motor load

n [rpm]: blower speed

LmA [dB]: level of acoustic pressure with and without noise enclosure

Δp mbar	ZL 10000								
	A	B	C	D	E	F	G	H	
300	Q [m³/h]	6398	7343	7816	8090	8442	8977	9576	10284
	T [°C]	51	51	51	51	50	50	50	50
	Pe [kW]	70.8	81.9	87.8	93.9	100.5	108	117	127.5
	Pm [kW]	90	110	110	132	132	132	160	160
	element rpm	1485	1683	1782	1884	1987	2104	2235	2384
	LmA [dB]	77/98	79/99	79/100	80/101	82/103	82/103	82/103	82/103
400	Q [m³/h]	6316	7263	7741	8013	8367	8903	9503	10207
	T [°C]	61	61	61	61	60	60	60	60
	Pe [kW]	91.7	105.6	112.9	120.4	128.2	137.6	148.3	161
	Pm [kW]	110	132	160	160	160	160	200	200
	element rpm	1486	1684	1783	1884	1987	2104	2235	2384
	LmA [dB]	78/99	79/100	80/101	81/102	84/106	84/106	84/106	84/106
500	Q [m³/h]	6252	7210	7688	7963	8304	8841	9442	10146
	T [°C]	70	70	70	70	70	70	70	70
	Pe [kW]	112.7	129.7	138.4	147.3	155.5	167.5	180.1	194.8
	Pm [kW]	132	160	200	200	200	200	200	250
	element rpm	1486	1684	1786	1885	1987	2104	2235	2384
	LmA [dB]	79/101	80/102	81/103	82/104	84/106	84/106	84/106	84/106
600	Q [m³/h]	6203	7094	7636	7907	8251	8788	9390	9928
	T [°C]	80	79	79	79	79	79	79	79
	Pe [kW]	134	152.4	163.8	174.1	184.8	197.4	211.9	224.7
	Pm [kW]	160	200	200	250	250	250	250	250
	element rpm	1486	1674	1787	1885	1987	2104	2235	2347
	LmA [dB]	80/103	81/104	82/105	83/106	85/107	85/107	85/107	85/107
700	Q [m³/h]	6152	7020	7591	7882	8332			
	T [°C]	90	89	89	89	89			
	Pe [kW]	155.1	175.6	189.5	200.6	213.2			
	Pm [kW]	200	200	250	250	250			
	element rpm	1488	1669	1788	1882	1987			
	LmA [dB]	81/105	82/106	83/106	84/108	85/110			
800	Q [m³/h]	6108	6977	7548					
	T [°C]	100	99	99					
	Pe [kW]	176.2	199.4	215					
	Pm [kW]	200	250	250					
	element rpm	1488	1669	1788					
	LmA [dB]	81/105	82/106	83/107					

Reference conditions: Inlet pressure: 1.013 bar(a) - Inlet temperature: 20°C dry air


Compact dimensions Easy installation



Standard unit

Model	A		B		C		Weight		Outlet connection		
	mm	in	mm	in	mm	in	kg	lb			
ZL 100	798	31.4	635	25.0	645	24.4	77	170	DN65.	PN10 acc.	DIN2501
ZL 300	811	31.9	648	25.5	845	33.3	91	201	DN65.	PN10 acc.	DIN2501
ZL 350	829	32.6	648	25.5	845	33.3	95	209	DN65.	PN10 acc.	DIN2501
ZL 400	823	32.4	648	25.5	961	37.8	120	264	DN65.	PN10 acc.	DIN2501
ZL 500	869	34.2	829	32.6	1065	41.9	150	331	DN80.	PN10 acc.	DIN2576
ZL 650	895	35.2	829	32.6	1065	41.9	160	353	DN80.	PN10 acc.	DIN2576
ZL 700	903	35.5	844	33.2	1186	46.7	200	441	DN80.	PN10 acc.	DIN2576
ZL 1000	1025	40.3	869	34.2	1240	48.8	230	507	DN100.	PN10 acc.	DIN2576
ZL 1200	1049	41.3	869	34.2	1240	48.8	245	540	DN100.	PN10 acc.	DIN2576
ZL 1400	1085	42.7	883	34.8	1247	49.1	325	716	DN100.	PN10 acc.	DIN2576
ZL 1600	1227	50.0	1022	40.2	1336	52.6	425	937	DN150.	PN10 acc.	DIN2576
ZL 2000	1277	50.2	1056	41.6	1336	52.6	750	1653	DN200.	PN10 acc.	DIN2576
ZL 2500	1324	52.1	1112	43.7	1518	59.7	750	1653	DN200.	PN10 acc.	DIN2576
ZL 3000	1643	64.7	1320	52.0	1687	66.4	750	1653	DN200.	PN10 acc.	DIN2576
ZL 3400	1717	67.6	1333	52.5	1816	71.5	975	2149	DN200.	PN10 acc.	DIN2576
ZL 4700	1825	71.8	1540	60.6	1932	76.1	1100	2425	DN250.	PN10 acc.	DIN2576
ZL 5000	1866	73.5	1597	62.9	2082	82.0	1375	3031	DN250.	PN10 acc.	DIN2576
ZL 5300	2036	80.1	1597	62.9	2082	82.0	1490	3285	DN300.	PN10 acc.	DIN2576
ZL 8200	2126	83.7	1597	62.9	2082	82.0	1710	3770	DN300.	PN10 acc.	DIN2576
ZL 10000	2126	83.7	1597	62.9	2082	82.0	1710	3770	DN300.	PN10 acc.	DIN2576


Excluding motor

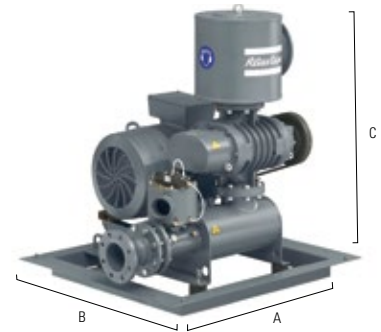

Sound enclosure

Model	A		B		C		Weight		Outlet connection		
	mm	in	mm	in	mm	in	kg	lb			
ZL 100	892	35.1	940	37.0	1106	43.5	197	434	DN65.	PN10 acc.	DIN2501
ZL 300	892	35.1	940	37.0	1106	43.5	211	465	DN65.	PN10 acc.	DIN2501
ZL 350	892	35.1	940	37.0	1106	43.5	120	264	DN65.	PN10 acc.	DIN2501
ZL 400	892	35.1	940	37.0	1106	43.5	240	529	DN65.	PN10 acc.	DIN2501
ZL 500	1022	40.2	1157	45.5	1291	50.8	310	683	DN80.	PN10 acc.	DIN2576
ZL 650	1022	40.2	1157	45.5	1291	50.8	320	705	DN80.	PN10 acc.	DIN2576
ZL 700	1102	43.4	1247	49.1	1433	56.4	360	794	DN80.	PN10 acc.	DIN2576
ZL 1000	1102	43.4	1247	49.1	1433	56.4	416	917	DN100.	PN10 acc.	DIN2576
ZL 1200	1102	43.4	1247	49.1	1433	56.4	431	950	DN100.	PN10 acc.	DIN2576
ZL 1400	1102	43.4	1247	49.1	1433	56.4	511	1126	DN100.	PN10 acc.	DIN2576
ZL 1600	1302	51.2	1406	55.3	1636	64.4	645	1422	DN150.	PN10 acc.	DIN2576
ZL 2000	1302	51.2	1406	55.3	1636	64.4	1240	2734	DN200.	PN10 acc.	DIN2576
ZL 2500	1302	51.2	1406	55.3	1636	64.4	1240	2734	DN200.	PN10 acc.	DIN2576
ZL 3000	1890	74.4	1752	69.0	1838	72.4	1240	2734	DN200.	PN10 acc.	DIN2576
ZL 3400	2090	82.3	1900	74.8	2158	85.0	1515	3340	DN200.	PN10 acc.	DIN2576
ZL 4700	2090	82.3	1955	77.0	2158	85.0	1640	3615	DN250.	PN10 acc.	DIN2576
ZL 5000	2090	82.3	1955	77.0	2158	85.0	1915	4222	DN250.	PN10 acc.	DIN2576
ZL 5300	2090	82.3	2295	90.3	2158	85.0	2070	4563	DN300.	PN10 acc.	DIN2576
ZL 8200	2090	82.3	2295	90.3	2158	85.0	2290	5048	DN300.	PN10 acc.	DIN2576
ZL 10000	2090	82.3	2295	90.3	2158	85.0	2490	5490	DN300.	PN10 acc.	DIN2576

Excluding motor



COMMITTED TO SUSTAINABLE PRODUCTIVITY

We stand by our responsibilities towards our customers, towards the environment and the people around us. We make performance stand the test of time. This is what we call – Sustainable Productivity.



www.atlascopco.com

The Atlas Copco logo, consisting of the brand name 'Atlas Copco' in a stylized, italicized font, positioned between two horizontal bars.