
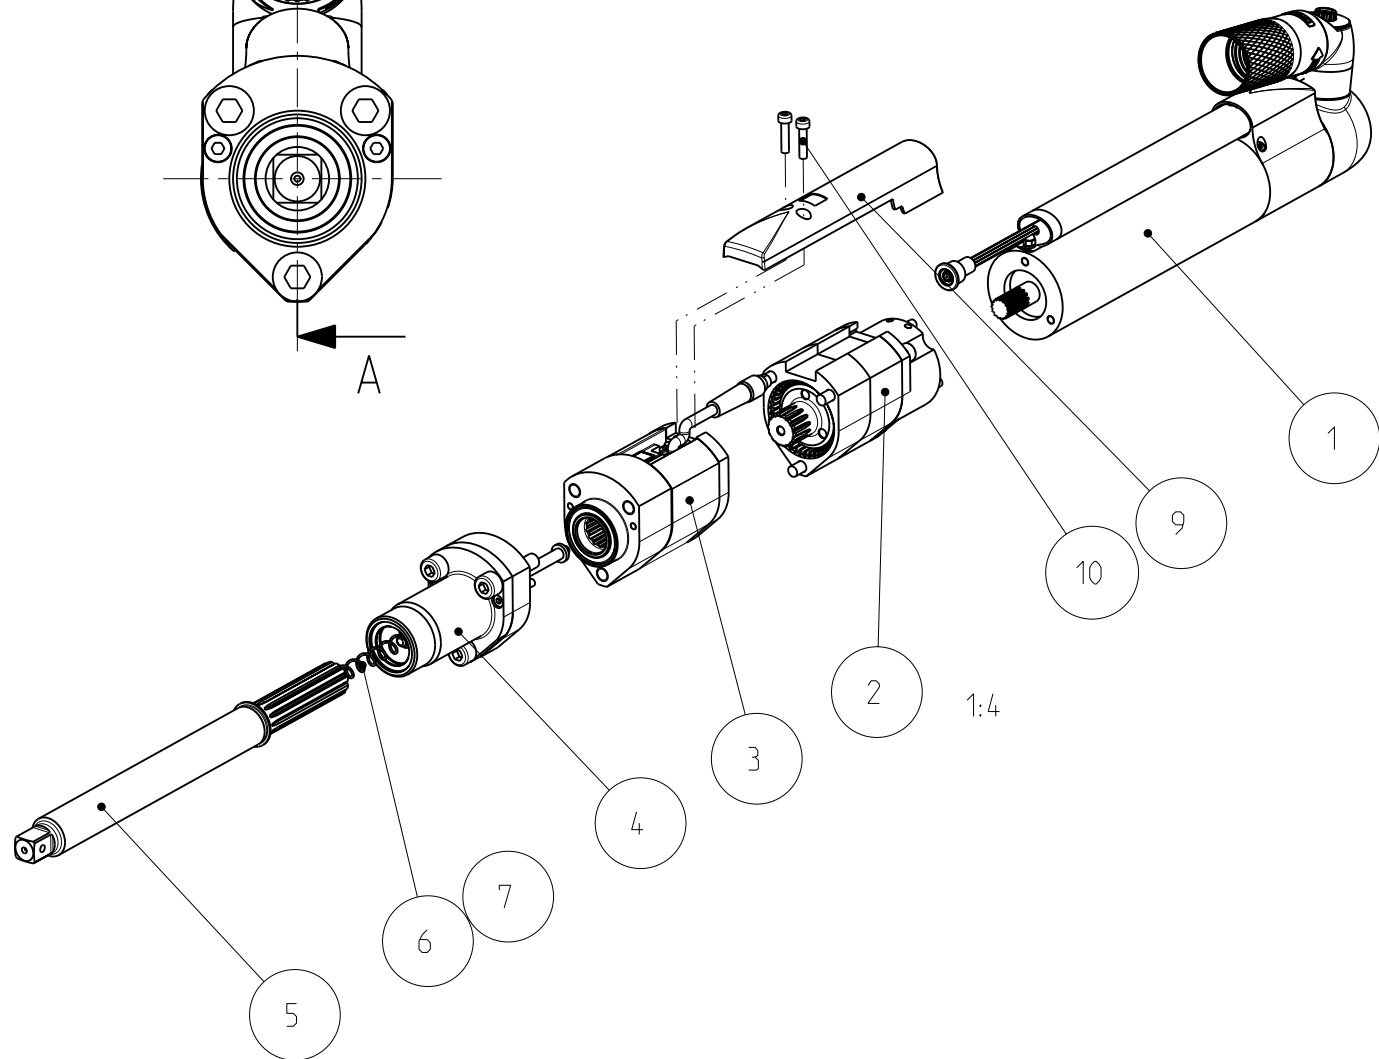
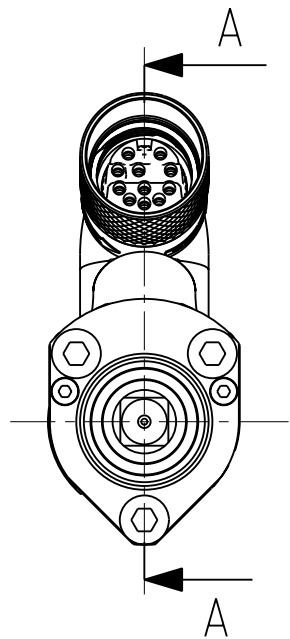


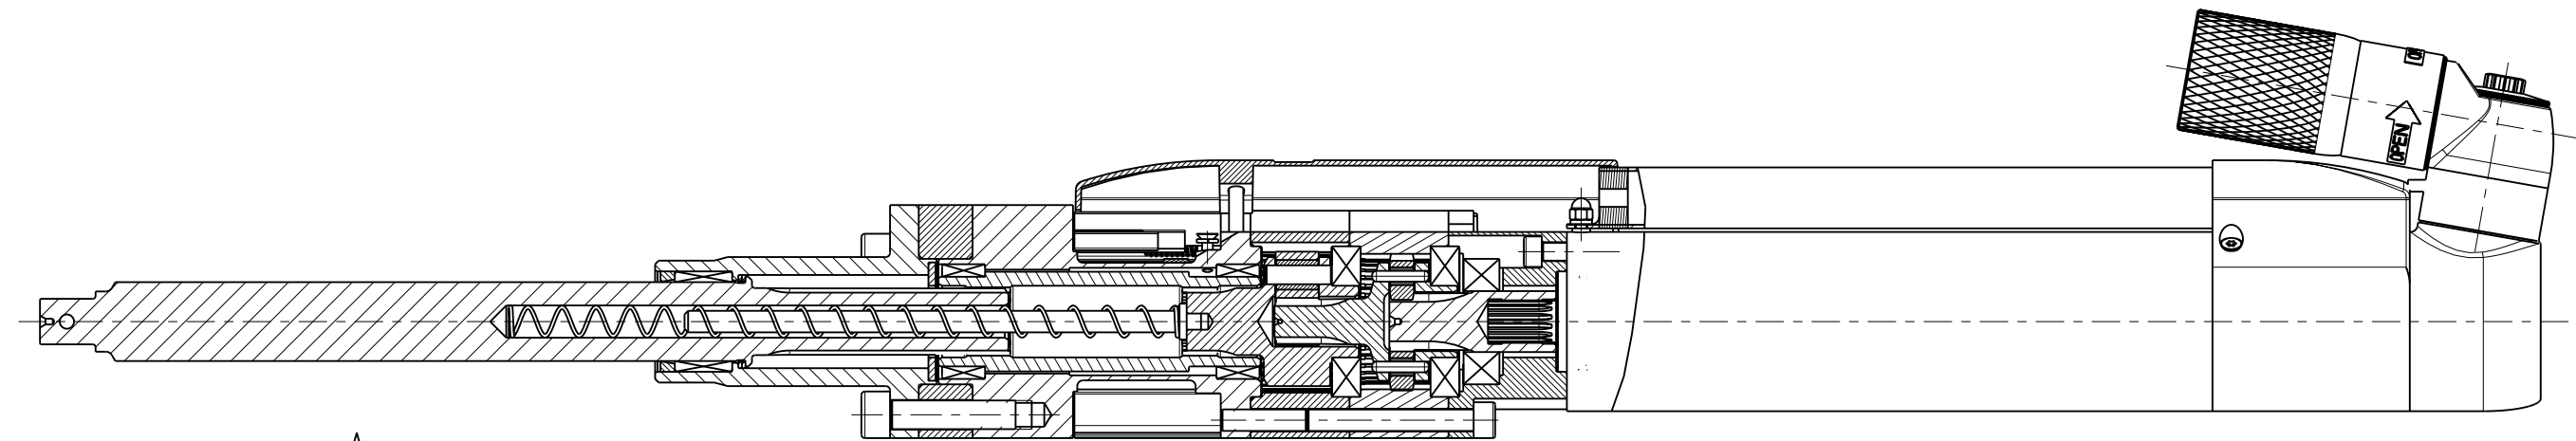

A - A

NUTRUNNERS COMPL. WITH SOCKET HOLDER	
A	1/2"
0	(8435 6040 10) See separate drawing
50	8435 4083 28
100	8435 4083 29
150	8435 4083 30
200	8435 4083 31
250	8435 4083 32

SOCKET HOLDERS	
A	1/2"
0	4230 1820 00
50	4230 2219 00
100	4230 2219 01
150	4230 2219 02
200	4230 2219 03
250	4230 2219 04

* For grease instruction see PZ4113

Strongest compression spring mounted at delivery
Comment: Max torque 90 Nm. Max speed 650 rpm.

10	0211 1965 27	2	HEX SOCK SCREW	MC6S M4x18 H 12.9
9	4230 2645 10	1	CABLE RAIL	QST 50
8	4230 1480 00	1	GREASE	KERNITE Lubra K HS*
7	4230 1825 02	1	COMPRESSION SPRING	20-30N
6	4230 1826 00	1	COMPRESSION SPRING	38-55N
5	-	1	SOCKET HOLDER	SEE "SOCKET HOLDERS"-TABLE ABOVE.
4	4230 1635 84	1	FRONT PART	QMX50
3	4230 2963 80	1	TRANSDUCER SET	QDT50-100
2	4230 2171 80	1	GEAR UNIT	ETX50 '50' : i=18.21= (((36/14)+1)*((41/10)+1)))
1	4230 3012 80	1	MOTOR	QST 50
Pos	Designation	Number	Name	Comment

Tolerances, if not indicated, according to:	-	-	-	-	-
AC-STD	-	-	-	-	-

Name	QST50-90CT			Secrecy class	-
Material	-			1102 K/-	-
	-			CAD Pro/E	-
Scale	1:2	Format	A3	Family	MK2_G
Drawn	JLT	Blank	-	Compare	-
Transferred from	Cons.class	1295 K/-	Rev	2	Status
	Mass/Volume	-	Date	2007-09-03	RELEASED
				Designation	4230 2721 00
				Sheet 1 (2)	

2	-	See separate drawing added	2013-04-03	CSR
Note	Pos.	Modified from	Date	Intr.

Model name	4230272100	Rev.Ver	2.0+
Drawing name	4230272100	Rev.Ver	2.1+

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

