
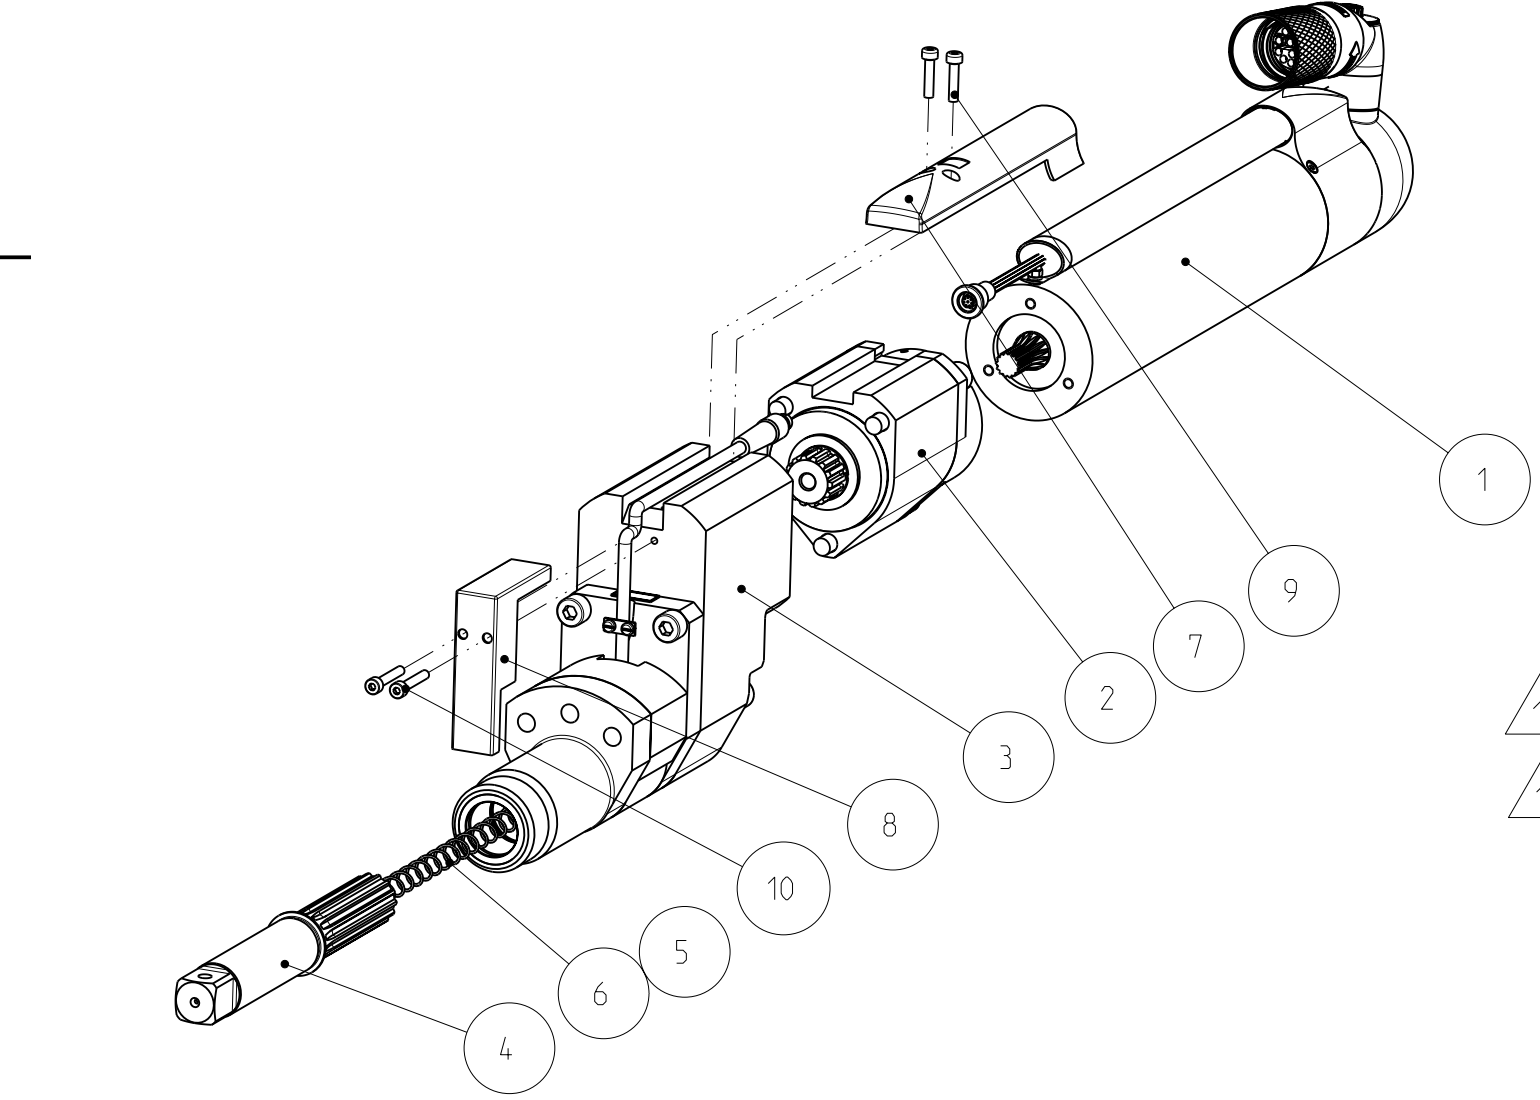


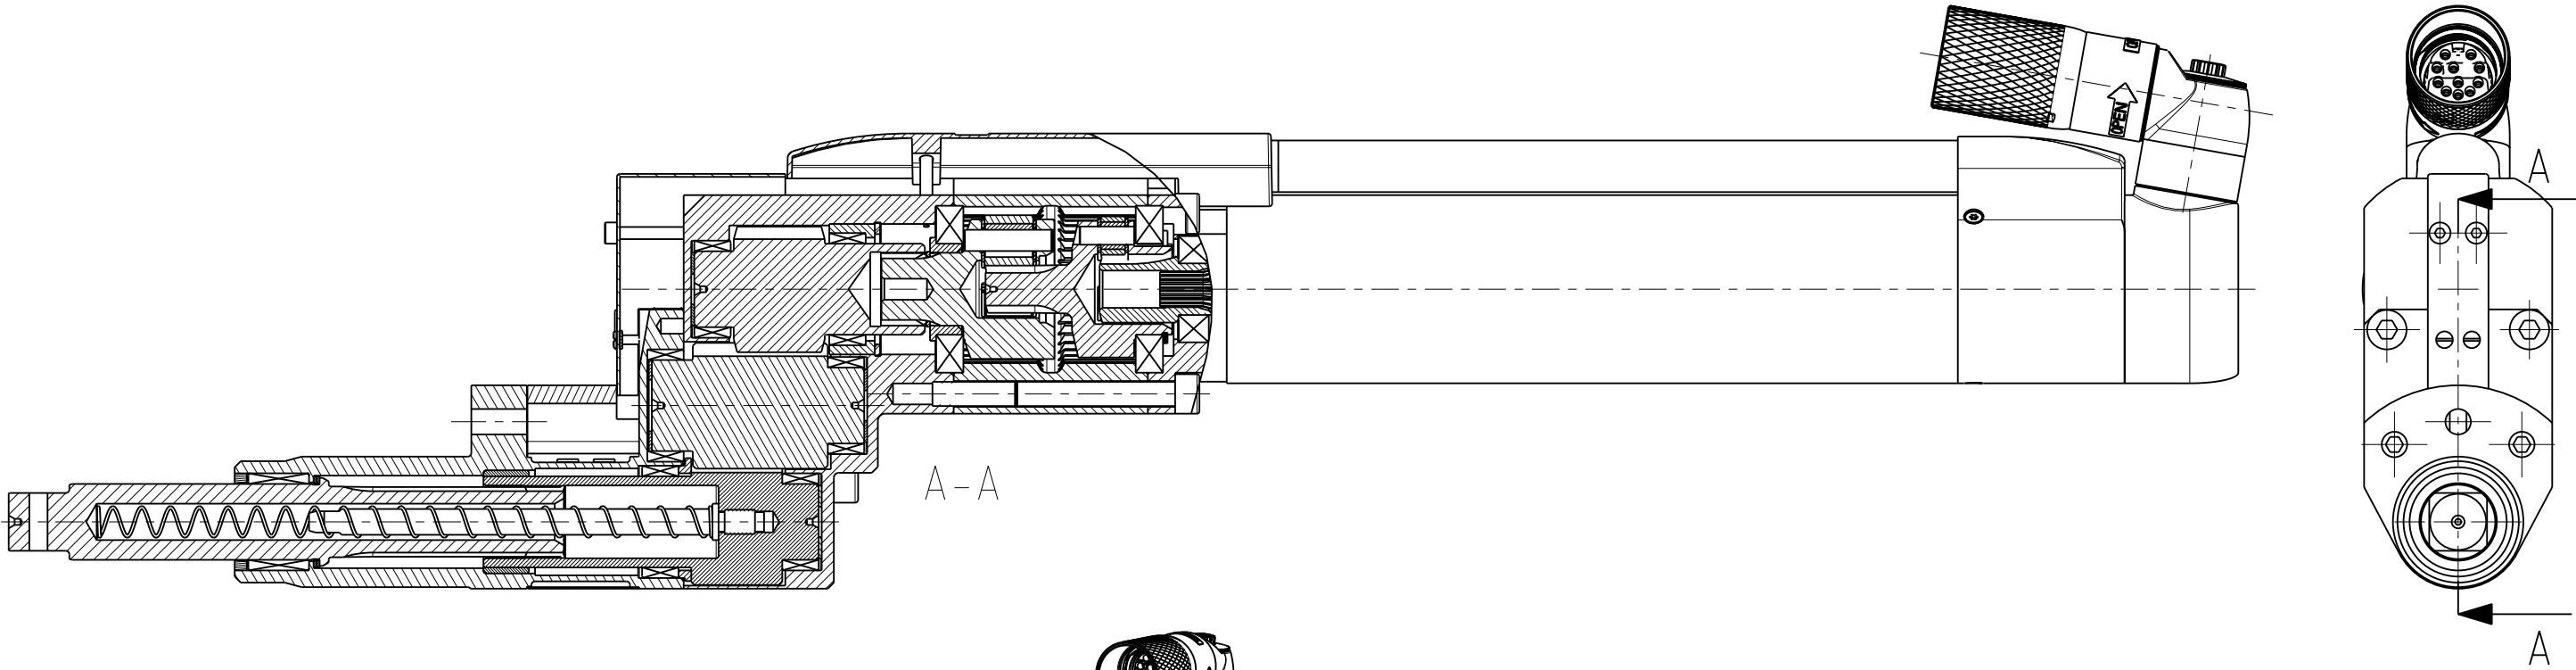

*FOR GREASE INSTRUCTION SEE PZ4113

Strongest compression spring mounted at delivery

Comment: Max torque 230 Nm. Max speed 330 r.p.m

11	4230 1480 00	1	GREASE	KERNITE Lubra K HS*
10	0211 1176 00	2	HEX SOCK SCREW	MC6S M4x25 12.9
9	0211 1965 27	2	HEX SOCK SCREW	MC6S M4x18 H 12.9
8	4230 2669 00	1	CABLERAIL	QST62-COT
7	4230 2647 10	1	CABLE RAIL	QST 62
6	4230 1827 00	1	COMPRESSION SPRING	QMX62 80 : 48-60N
5	4230 1827 01	1	COMPRESSION SPRING	QMX62 80 : 18-30N
4	4230 1822 00	1	SOCKET HOLDER	QMX62: 3/4" 0mm 50mm travel QM62 thru hole.
3	4230 2984 82	1	OFFSET GEAR	QDOTT62-100 i=1.00 300Nm
2	4230 2172 81	1	GEAR UNIT	QMX62 I=19.04 = ((41/15+1)*(41/10+1))
1	4230 3013 80	1	MOTOR	QST 62
Pos	Designation	Number	Name	Comment


Tolerances, if not indicated, according to:		-	-	-	-	-
AC-STD		-	-	-	-	-
Name QST62-230COTT-T50-L152-H19/1					QST	
Material -					1102 K/-	
-					CAD Pro/E	
Scale 9:20		Format A3	Family MK2_G	Compare -	Drawing owner	
Drawn PLK		Blank -	Replaces -	T00		
Cons.class 1295 K/-		Rev 1	Status RELEASED	Designation		
Mass/Volume 13.2 kg		Date 2009-02-18	8435 6065 60			


1	-	New connector: Motor & Offset Gear replaced = MK2	2013-03-07	CSR
Note	Pos.	Modified from	Date	Intr.

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

Rev. Ver 1.1

1	-	New connector: Motor & Offset Gear replaced = MK2	2013-03-07	CSR
Note	Pos.	Modified from	Date	Intr.

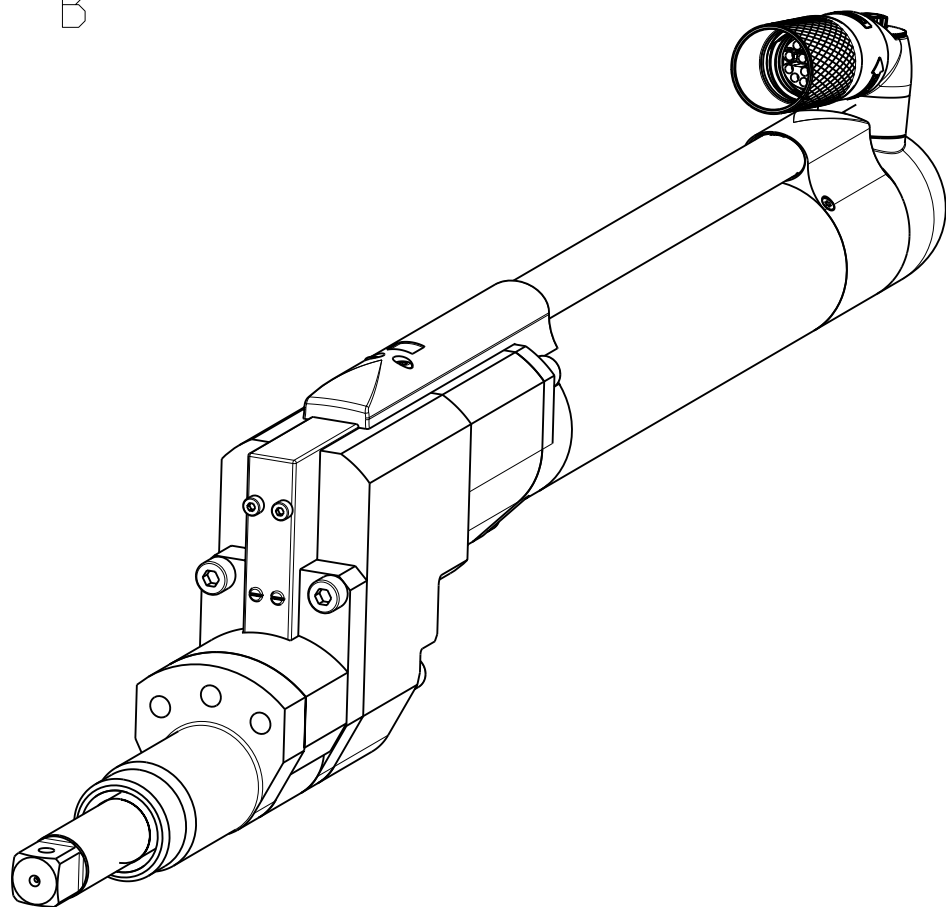

Tolerances, if not indicated, according to:		-	-	-	-	-
AC-STD		-	-	-	-	-
Name QST62-230COTT-T50-L152-H19 QST					Secrecy class	
Material -					1102 K/-	
-					CAD Pro/E	
Atlas Copco		Scale 9:20	Format A3	Family MK2_G	Compare -	Drawing owner TOO
Drawn PLK			Blank -	Replaces -		
Transferred from -	Cons.class 1295 K/-		Rev 1	Status RELEASED	Designation	
	Mass/Volume 13.2 kg		Date 2009-02-18	8435 6065 60		
						Sheet 2 (2)