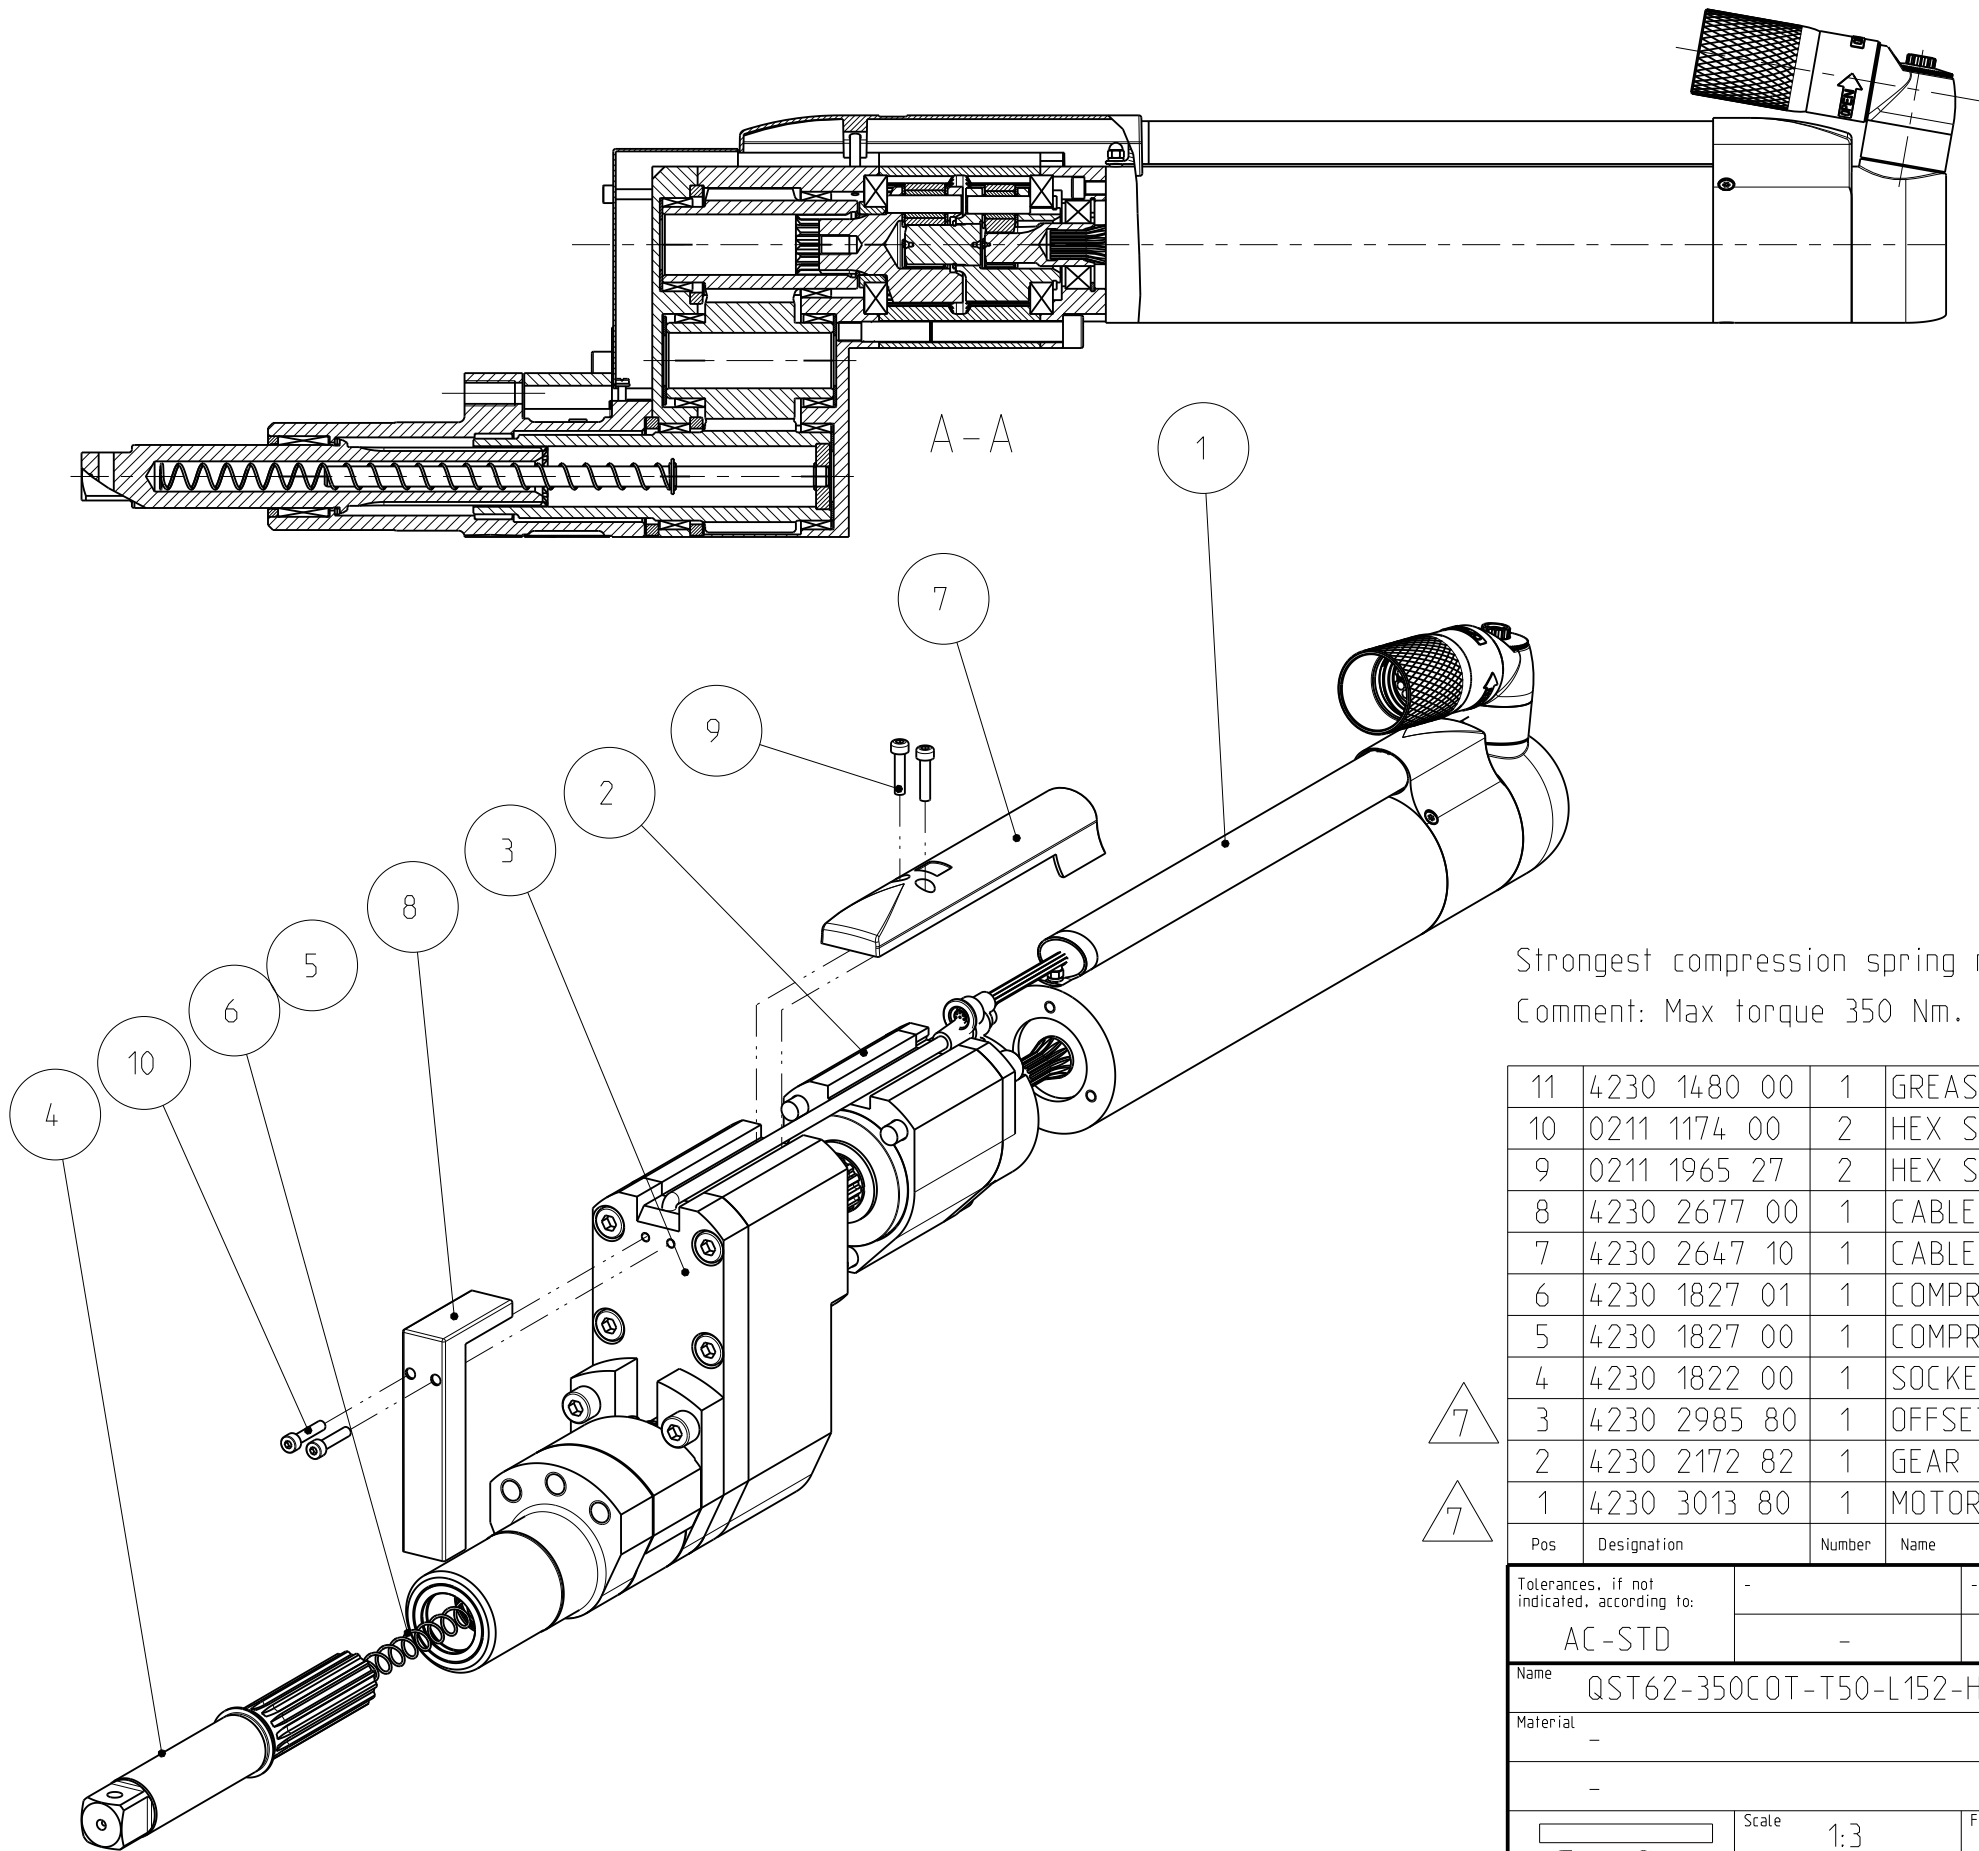


*FOR GREASE INSTRUCTION SEE PZ4113

Strongest compression spring mounted at delivery
Comment: Max torque 350 Nm. Max speed 220 r.p.m

11	4230 1480 00	1	GREASE	KERNITE Lubra K HS*
10	0211 1174 00	2	HEX SOCK SCREW	MC6S M4x20 12.9
9	0211 1965 27	2	HEX SOCK SCREW	MC6S M4x18 H 12.9
8	4230 2677 00	1	CABLE RAIL	QST62-350COT
7	4230 2647 10	1	CABLE RAIL	QST 62
6	4230 1827 01	1	COMPRESSION SPRING	QMX62 80 : 18-30N
5	4230 1827 00	1	COMPRESSION SPRING	QMX62 80 : 48-60N
4	4230 1822 00	1	SOCKET HOLDER	QMX62: 3/4" 0mm 50mm travel QM62 thru hole.
3	4230 2985 80	1	OFFSET GEAR	QDOT62: i=1.000 350Nm
2	4230 2172 82	1	GEAR UNIT	QMX62: 350Nm:i=28.33 ((41/9+1)*(41/10+1))
1	4230 3013 80	1	MOTOR	QST 62
Pos	Designation	Number	Name	Comment



Tolerances, if not indicated, according to:	-	-	-	-	-
AC-STD	-	-	-	-	-


Name QST62-350COT-T50-L152-H19				Secrecy class -	
Material -				1102 K/-	
-				CAD Pro/E	
Scale 1:3		Format A3	Family MK2_G	Compare -	Drawing owner
Drawn tooten		Blank -		Replaces	T00
Cons.class 1295 K/-		Rev 8	Status Released	Designation	
Mass/Volume 13.7 kg		Date 2006-12-19		Sheet 1 (2)	
Transferred from SW		8435 6070 20			

8		The diam. 43 was 42.5.	2014-09-24	M0m
Note	Pos.	Modified from	Date	Intr.

Model name	84.35607020	Rev. Ver	8.1
Drawing name	84.35607020	Rev. Ver	8.1

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

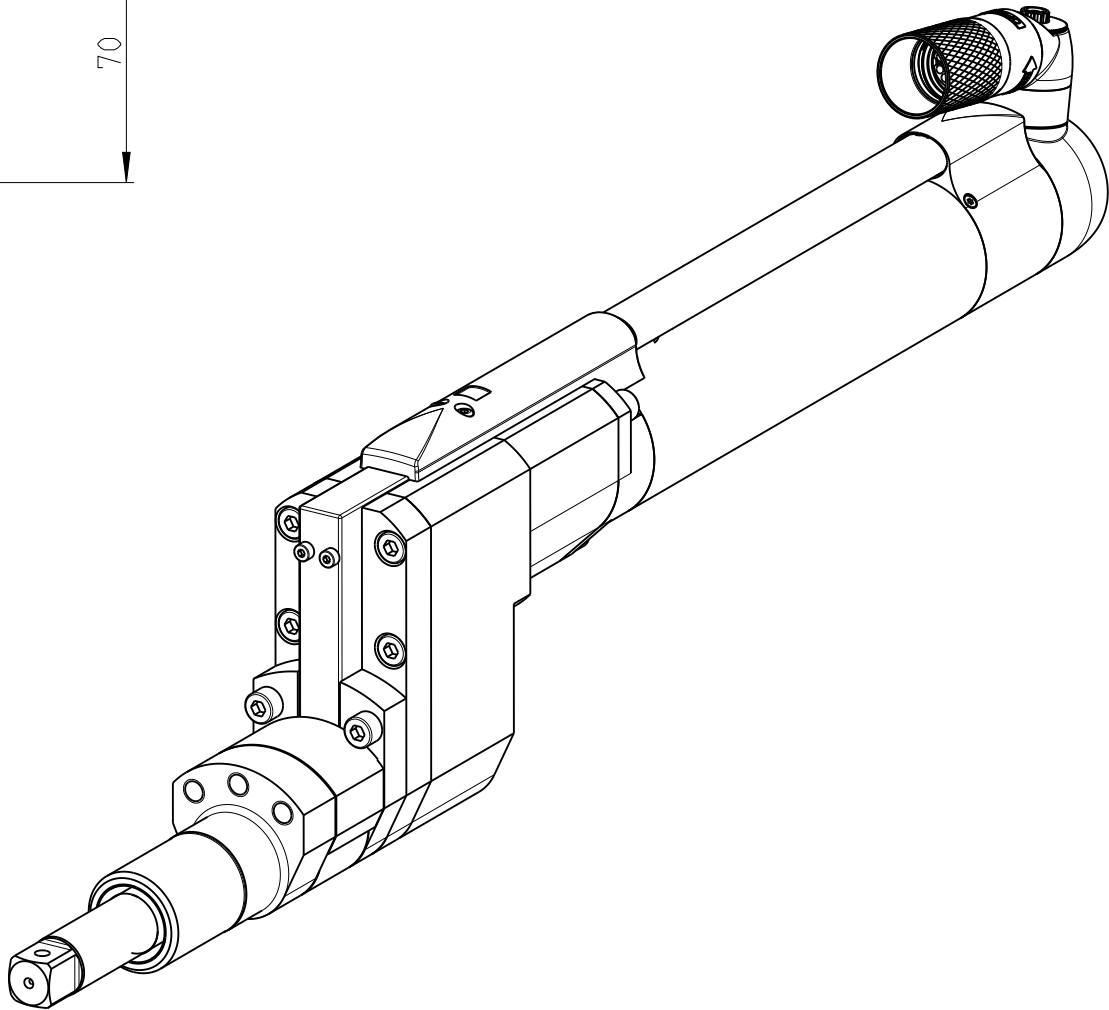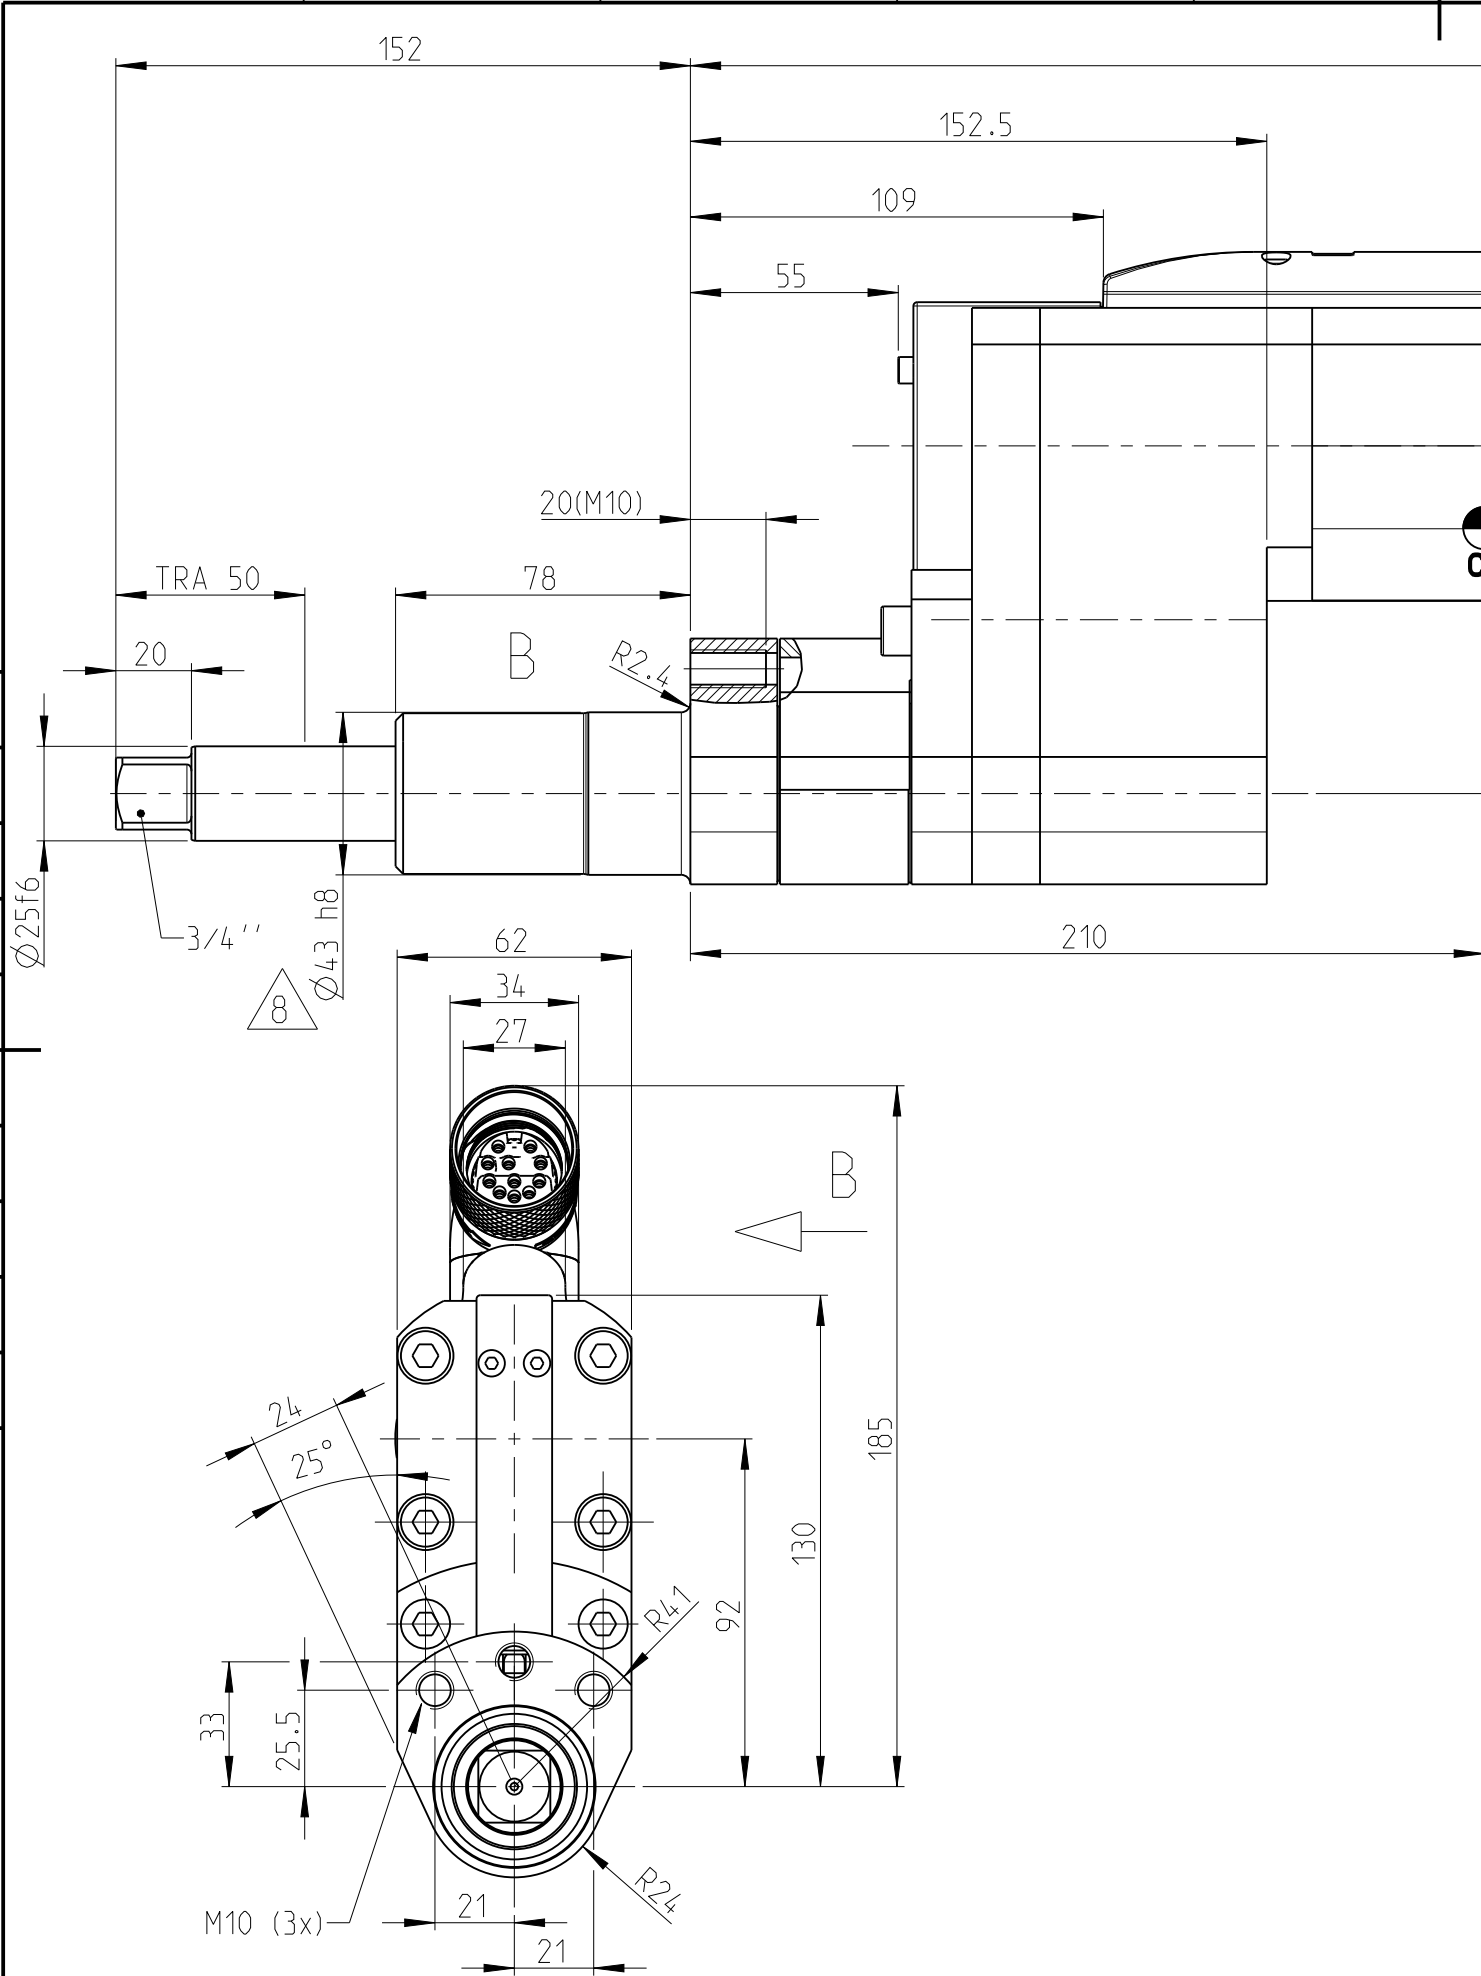

Tolerances, if not indicated, according to:		-	-	-	-	-
AC-STD		-	-	-	-	-
Name QST62-350COT-T50-L152-H19					Secrecy class	
Material -					1102 K/-	
-					CAD Pro/E	
<i>Atlas Copco</i>		Scale 1:2	Format A3	Family MK2_G	Compare -	Drawing owner
Drawn tooten			Blank -	Replaces		T00
Transferred from SW		Cons.class 1295 K/-	Rev 8	Status Released	Designation	
		Mass/Volume 13.7 kg		Date 2006-12-19	8435 6070 20	
Sheet 2 (2)						

8		The diam. 43 was 42.5.	2014-09-24	M0m
Note	Pos.	Modified from	Date	Intr.