
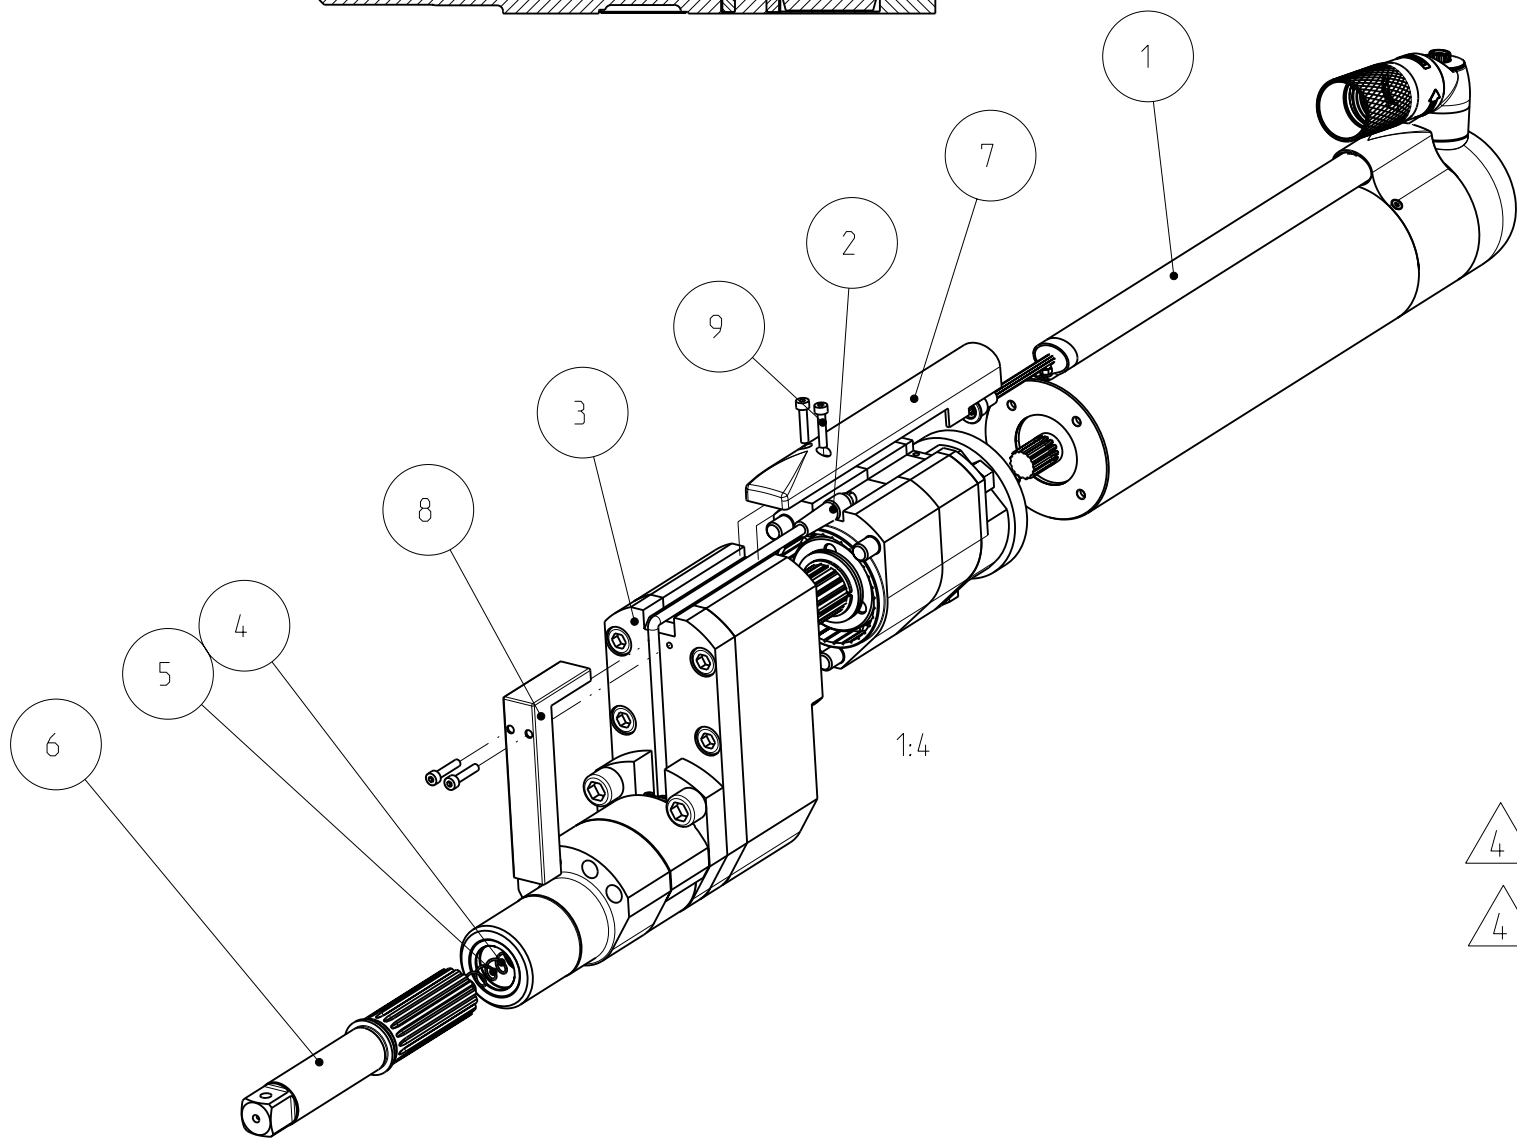
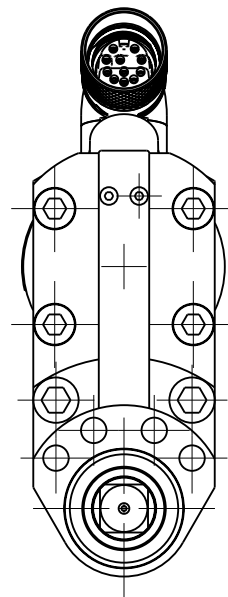


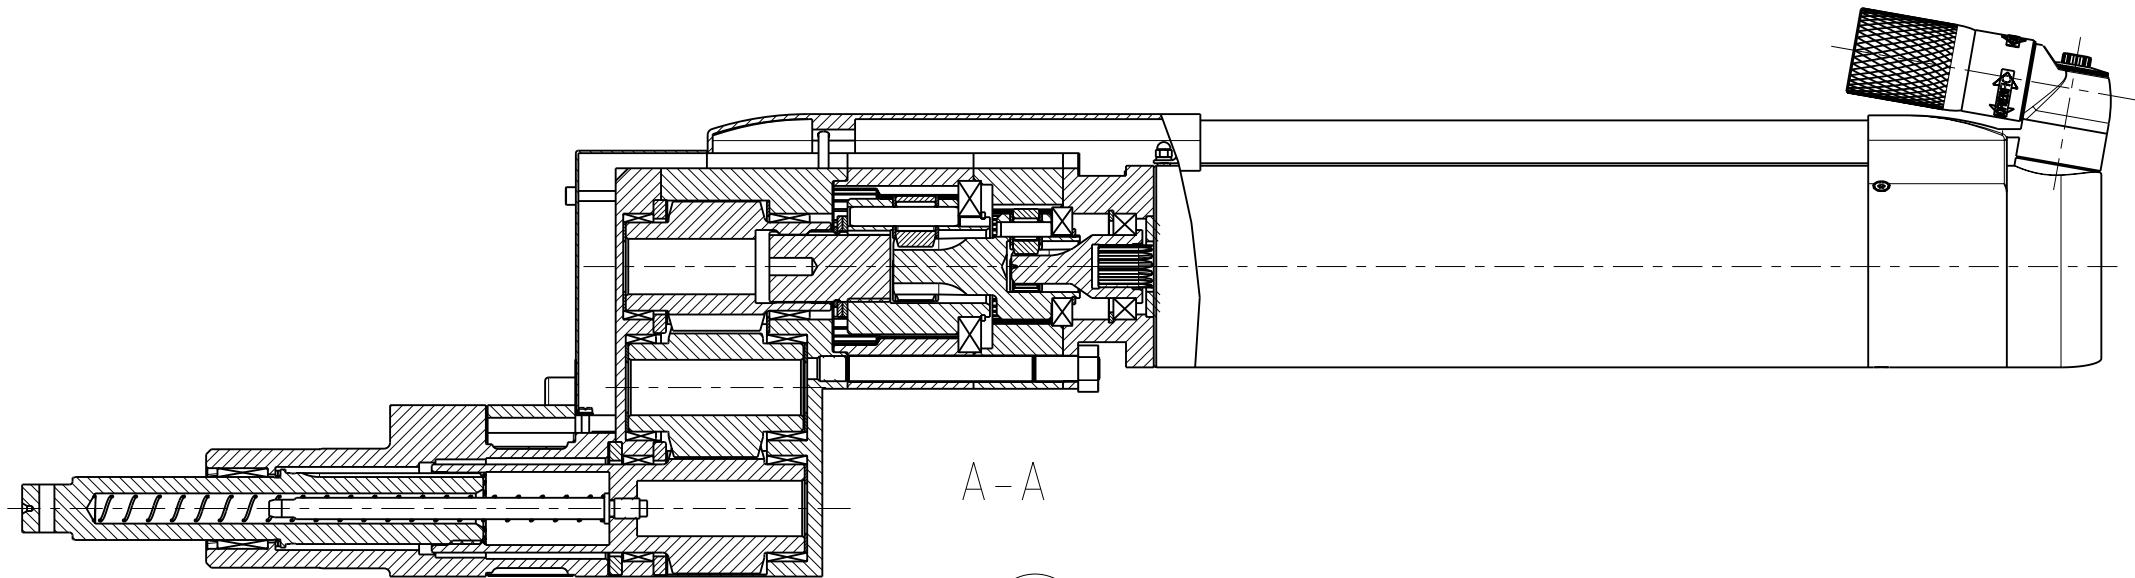

*FOR GREASE INSTRUCTION SEE PZ4113

Strongest compression spring mounted at delivery
Comment: Max torque 450Nm. Max speed 265rpm.



10	4230 1480 00	1	GREASE	KERNITE Lubra K HS*
9	0211 1174 00	4	HEX SOCK SCREW	MC6S M4x20 12.9
8	4230 2708 00	1	CABLE RAIL	QST80-COT
7	4230 2681 05	1	CABLE RAIL	QST 80 offset
6	4230 1971 00	1	SOCKET HOLDER	QMX80 :3/4" :Tra. 50
5	4230 1827 01	1	COMPRESSION SPRING	QMX62 80 : 18-30N
4	4230 1827 00	1	COMPRESSION SPRING	QMX62 80 : 48-60N
3	4230 2986 80	1	OFFSET GEAR	QST80
2	4230 2682 80	1	GEAR UNIT	QST80 i=22.673 ((47/11)+1)*((33/10)+1)
1	4230 3014 80	1	MOTOR	QST80/90
Pos	Designation	Number	Name	Comment

Tolerances, if not indicated, according to:	-	-	-	-	-
AC-STD	-	-	-	-	-

Name	QST80-450COT-T50-L146-H19				QST	Secrecy class
Material	-				1102 K/-	
	-				CAD Pro/E	
	Scale	1:3	Format	A3	Family	MK2_G
	Drawn	tooten	Blank	-	Replaces	-
Transferred from	Cons.class	1295 K/-	Rev	4	Status	RELEASED
-	Mass/Volume	22.1 kg	Date	2007-05-31	Designation	8435 6075 20

Note	4	-	New connector: Motor & Offset Gear replaced = MK2	2013-03-07	JZr
	Pos.	Modified from		Date	Intr.

Rev. Ver	4.1
Rev. Ver	4.1

[illegible]

Atlas Copco

4	-	New connector: Motor & Offset Gear replaced = MK2	2013-03-07	JZr
Note	Pos.	Modified from	Date	Intr.