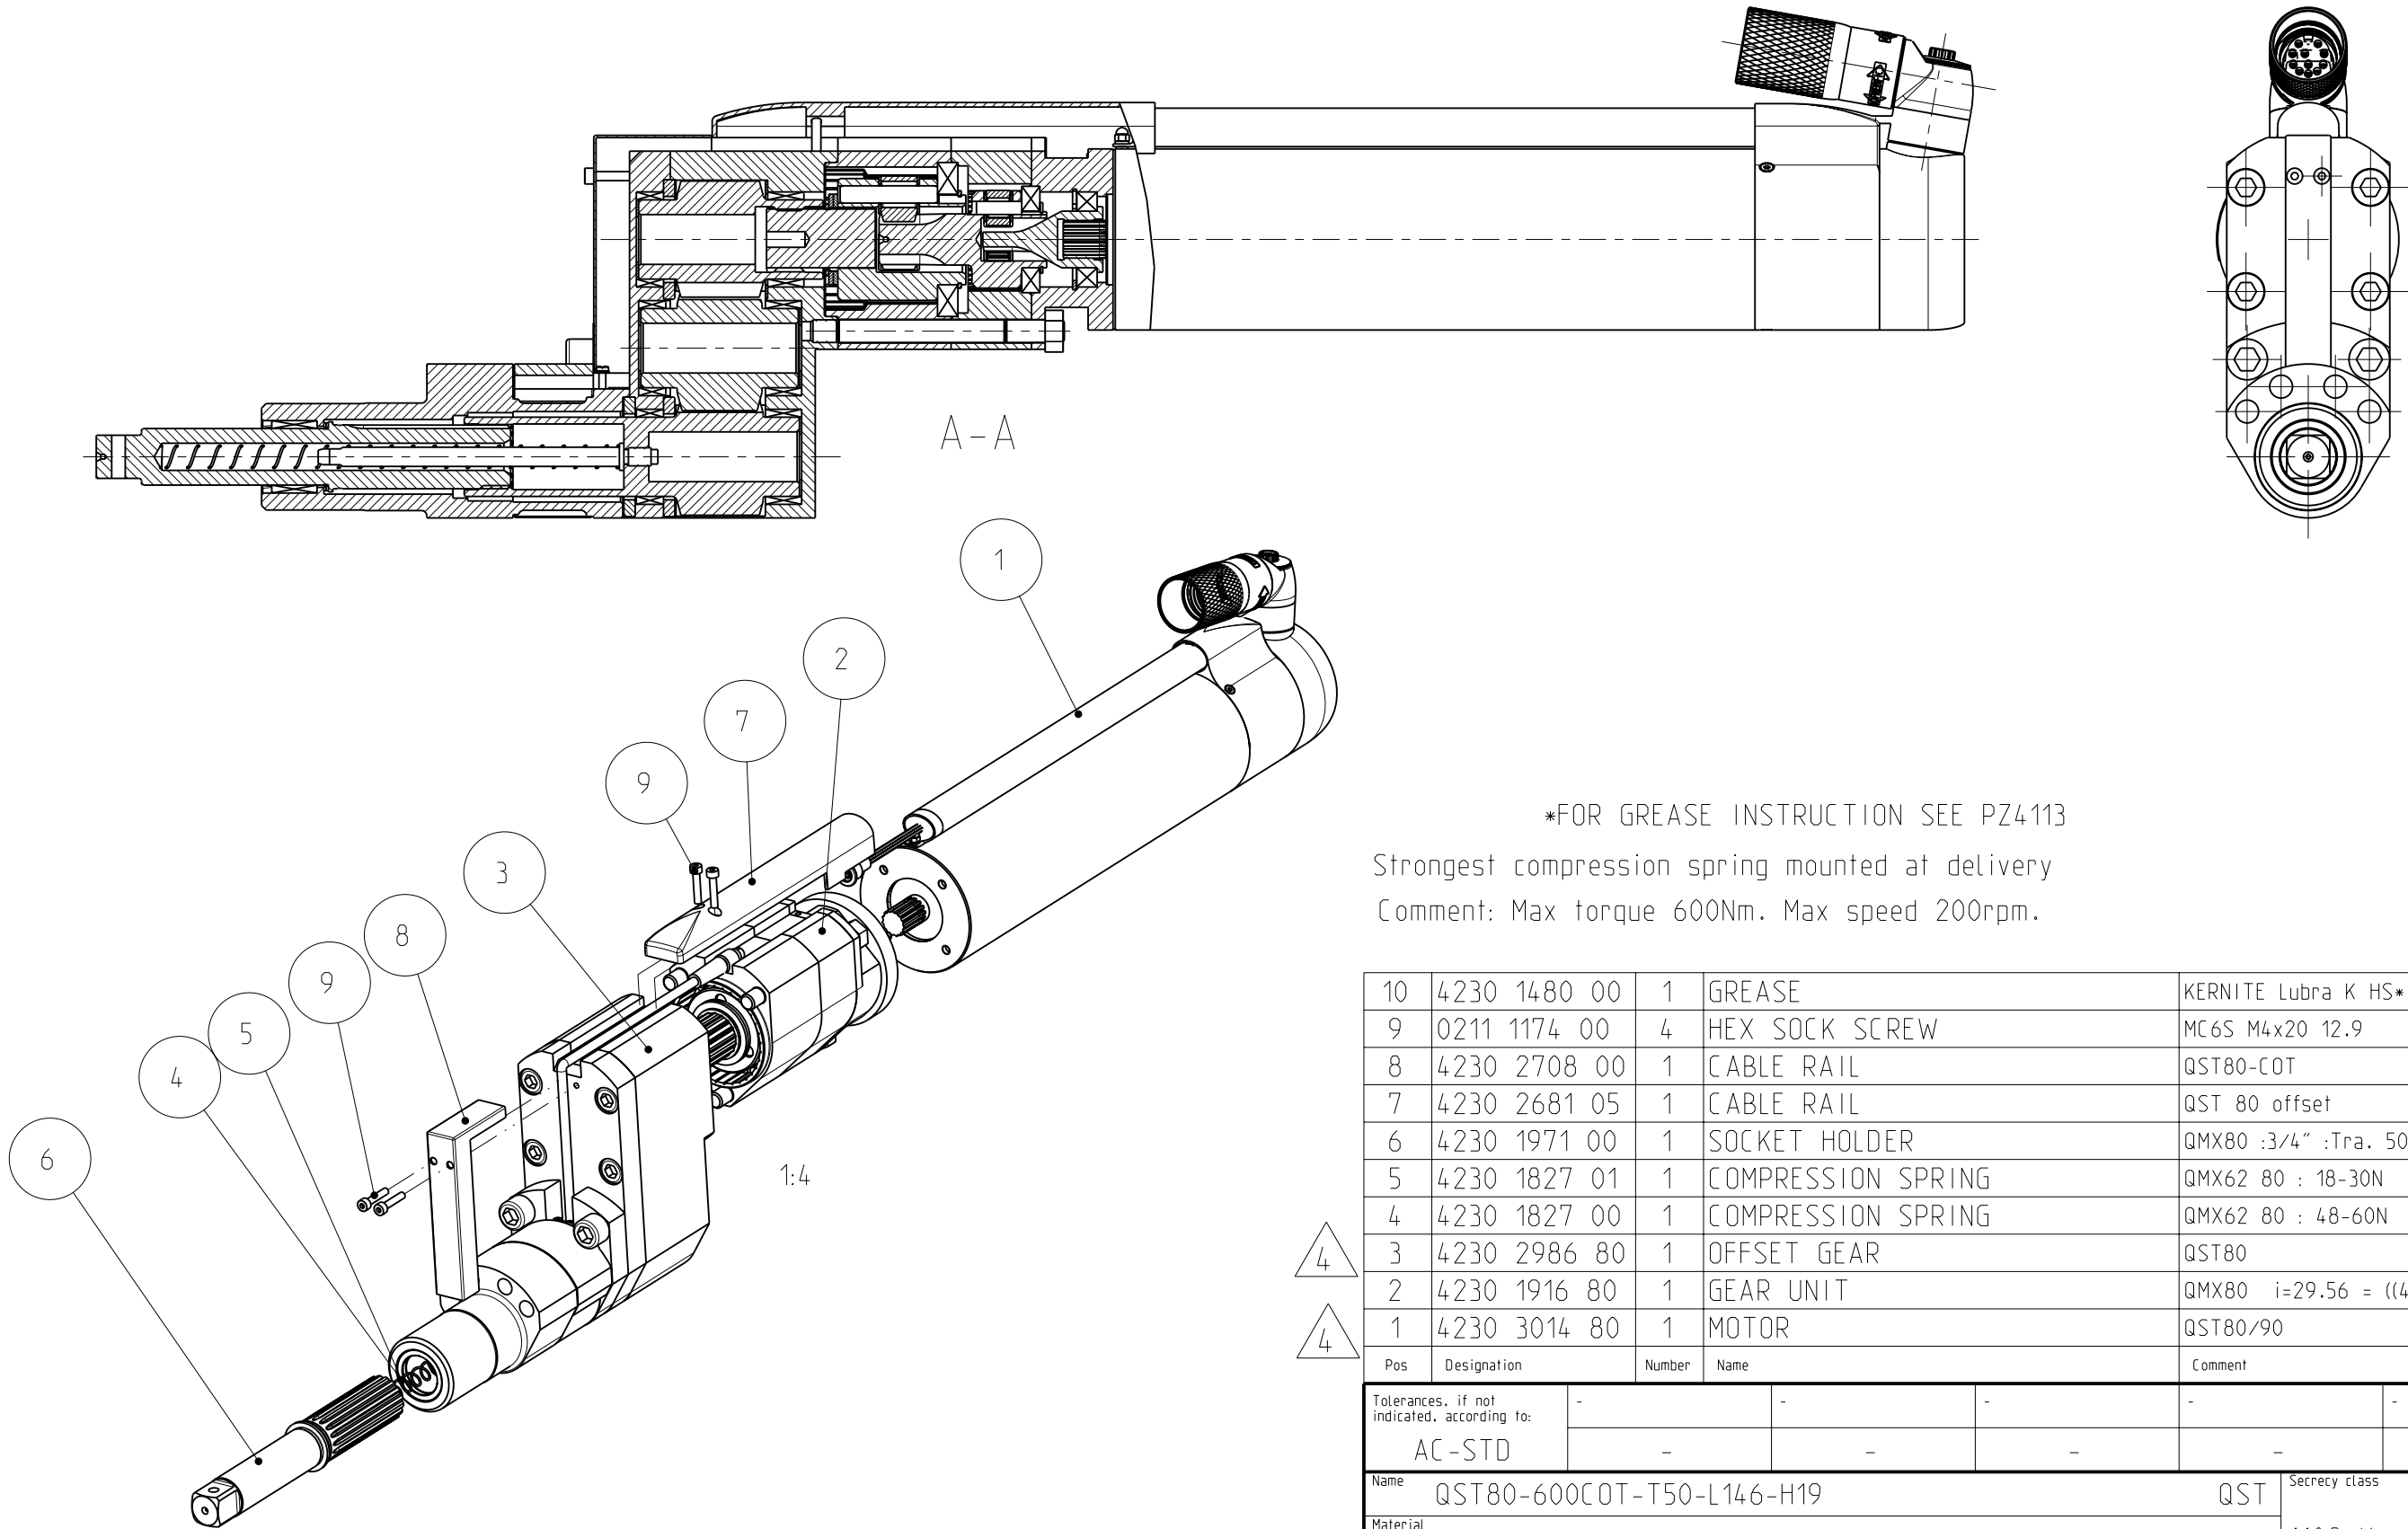





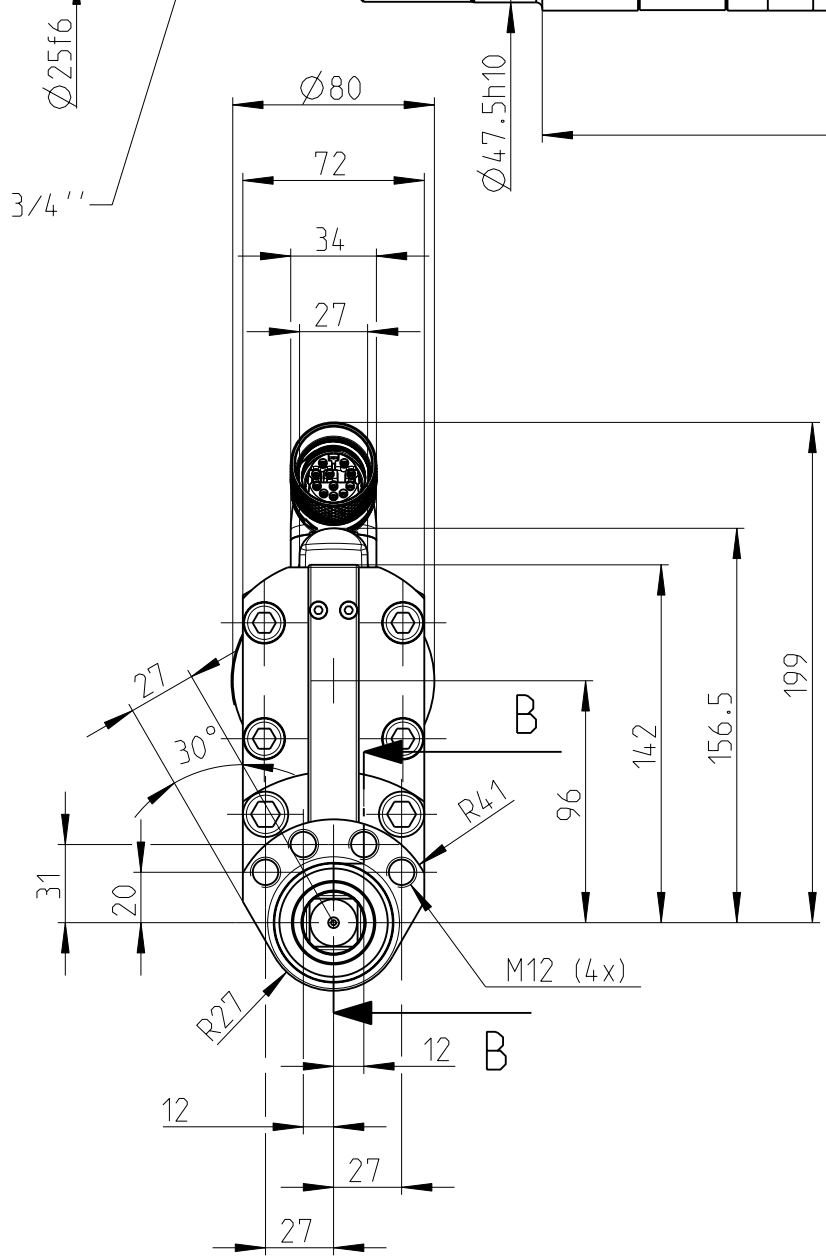
*FOR GREASE INSTRUCTION SEE PZ4113
Strongest compression spring mounted at delivery
Comment: Max torque 600Nm. Max speed 200rpm.

10	4230 1480 00	1	GREASE	KERNITE Lubra K HS*
9	0211 1174 00	4	HEX SOCK SCREW	MC6S M4x20 12.9
8	4230 2708 00	1	CABLE RAIL	QST80-COT
7	4230 2681 05	1	CABLE RAIL	QST 80 offset
6	4230 1971 00	1	SOCKET HOLDER	QMX80 :3/4" :Tra. 50
5	4230 1827 01	1	COMPRESSION SPRING	QMX62 80 : 18-30N
4	4230 1827 00	1	COMPRESSION SPRING	QMX62 80 : 48-60N
3	4230 2986 80	1	OFFSET GEAR	QST80
2	4230 1916 80	1	GEAR UNIT	QMX80 i=29.56 = ((47/8+1)*(33/10+1))
1	4230 3014 80	1	MOTOR	QST80/90

Pos	Designation	Number	Name	Comment
Tolerances, if not indicated, according to:				
AC-STD				
Name QST80-600COT-T50-L146-H19				QST
Material -				1102 K/-
-				CAD Pro/E
Scale 1:3		Format A3	Family MK2_G	Compare -
Drawn tooten		Blank -	Replaces	Drawing owner
Cons.class 1295 K/-		Rev 4	Status RELEASED	T00
Transferred from -		Mass/Volume 22.1 kg	Date 2007-05-07	
Designation				Sheet 1 (2)
8435 6080 20				

4	-	New connector: Motor & Offset Gear replaced = MK2	2013-03-07	ASH
Note	Pos.	Modified from	Date	Intr.

Rev. Ver	4.0+
Rev. Ver	4.1

[illegible]

Tolerances, if not indicated, according to:		-	-	-	-	-
AC-STD		-	-	-	-	-
Name QST80-600COT-T50-L146-H19					QST	Secrecy class
Material -					1102 K/-	
-					CAD Pro/E	
Atlas Copco	Scale 1:3	Format A3	Family MK2_G	Compare -	Drawing owner	
	Drawn tooten		Blank -	Replaces	TOO	
Transferred from -	Cons.class 1295 K/-	Rev 4	Status RELEASED	Designation 8435 6080 20	Sheet 2 (2)	
	Mass/Volume 22.1 kg	Date 2007-05-07				