


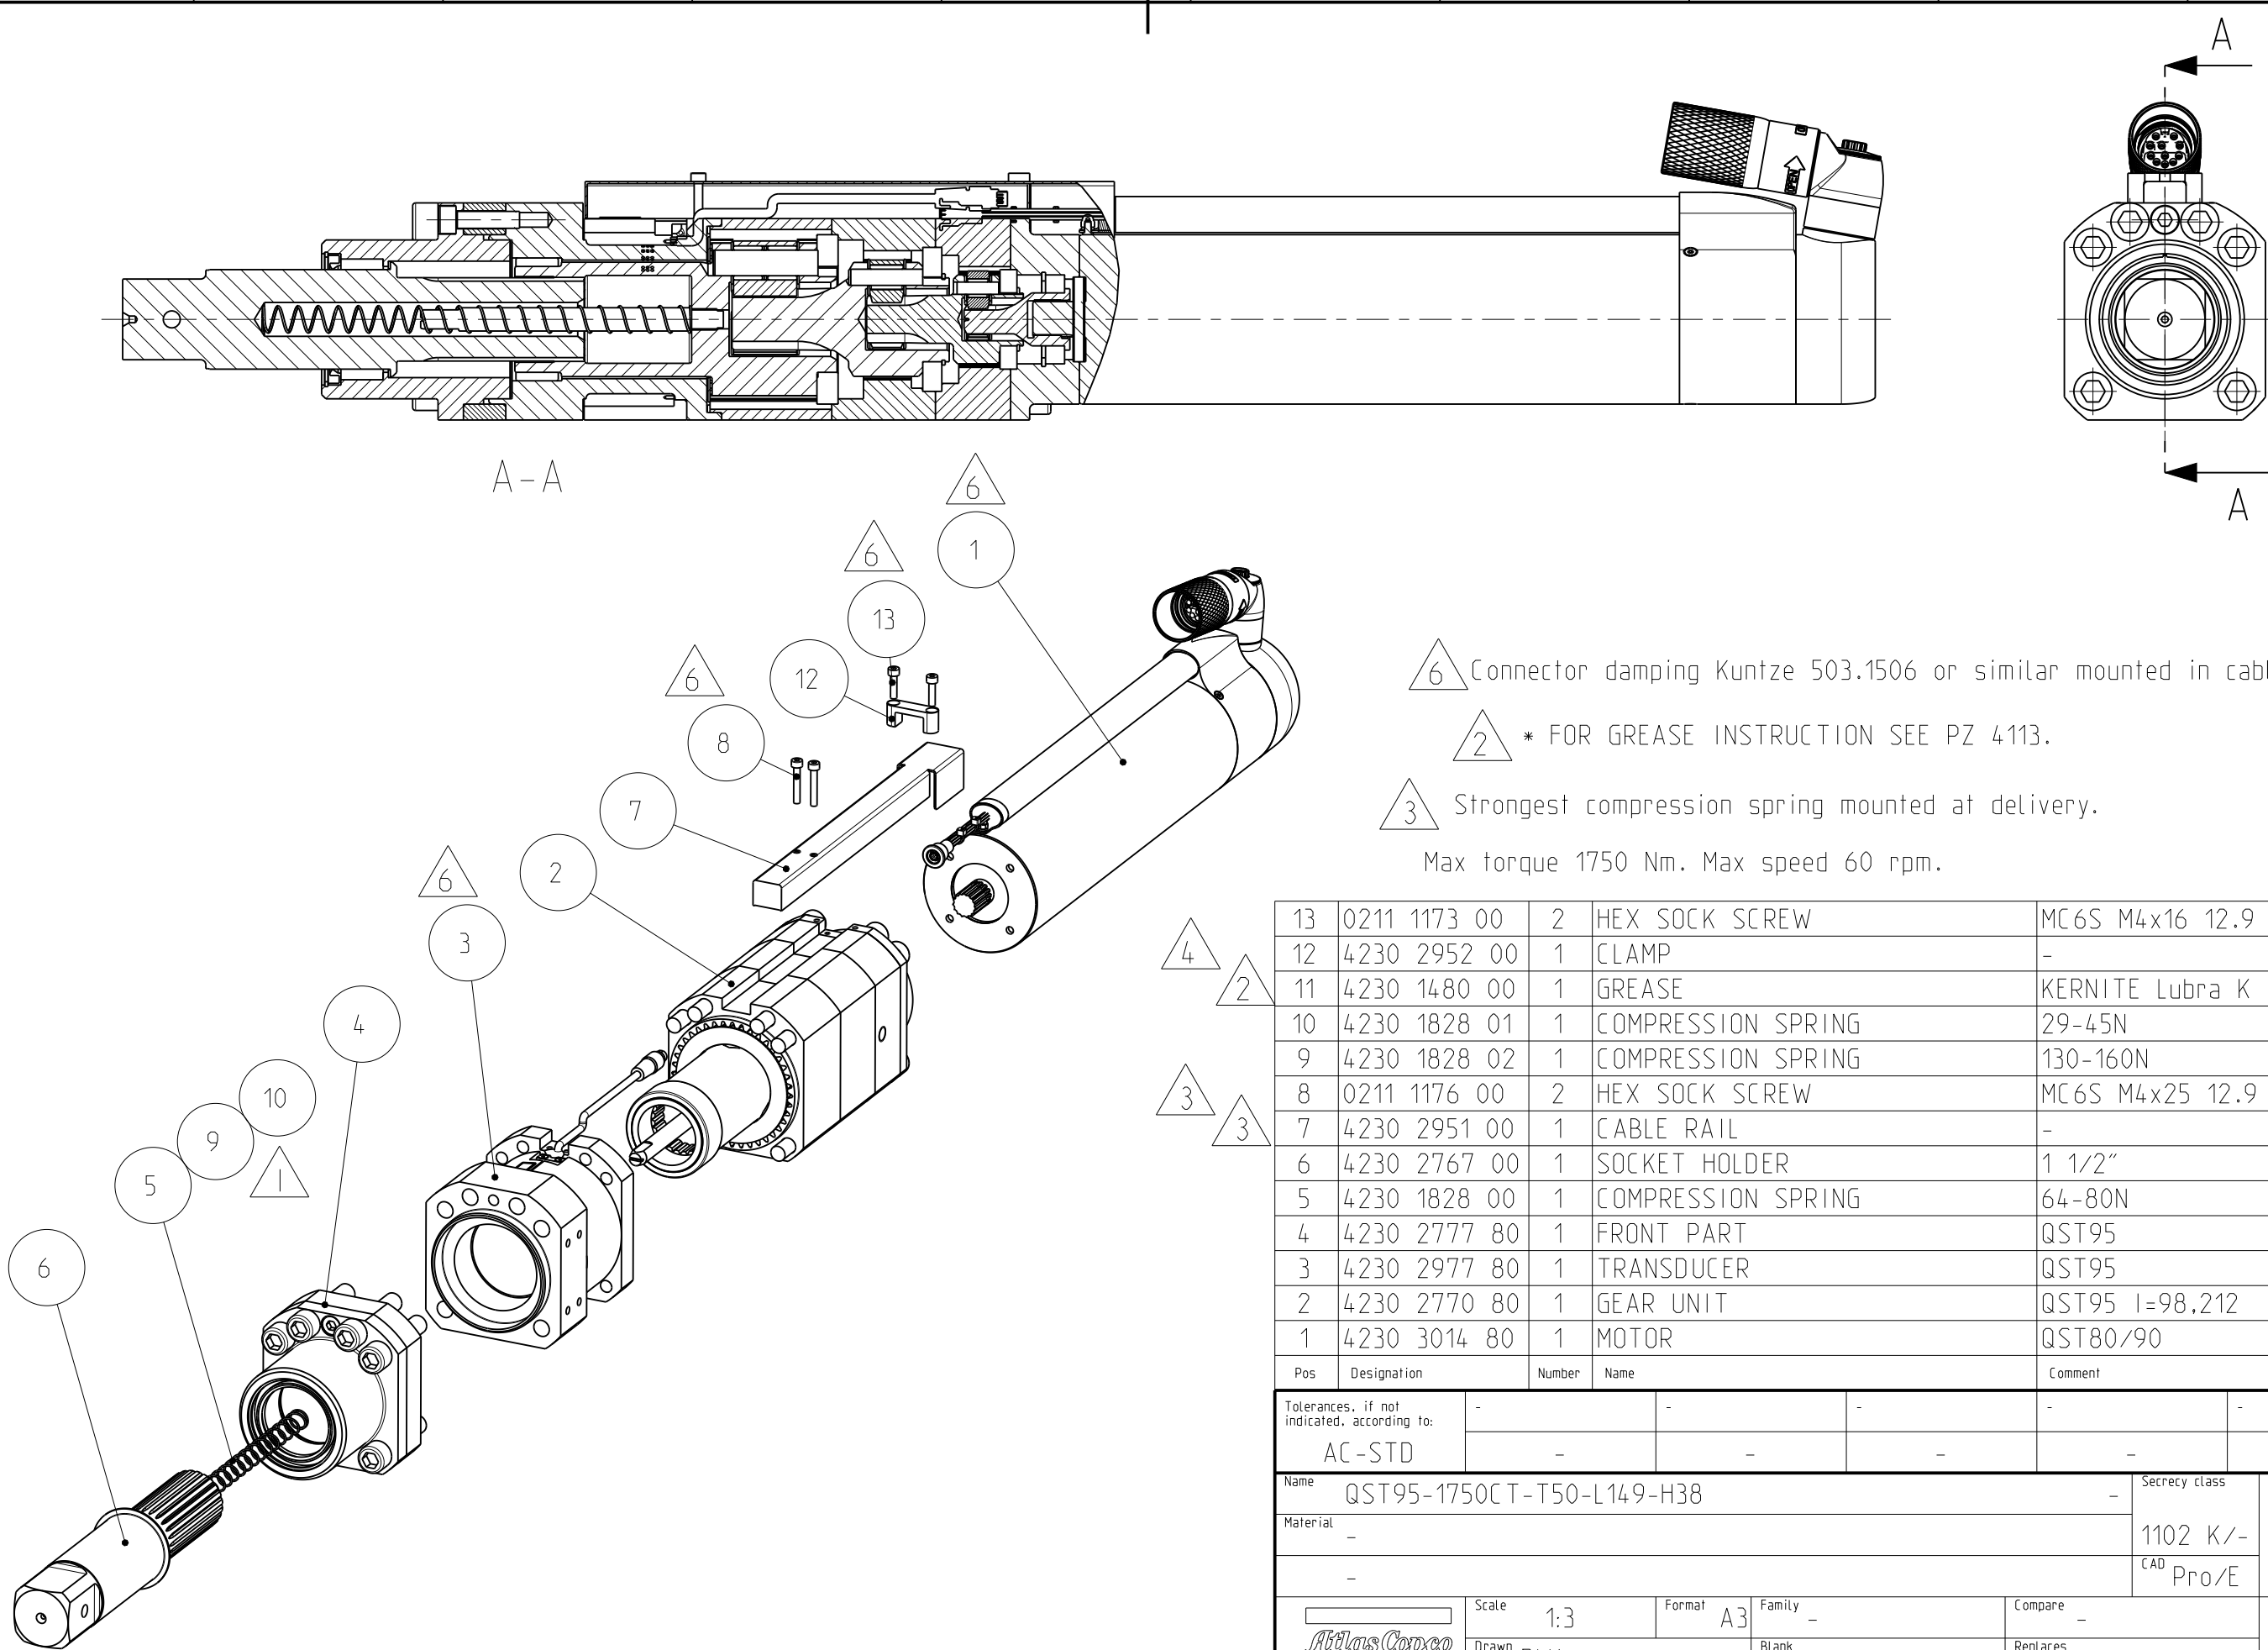

- △ 6 Connector damping Kuntze 503.1506 or similar mounted in cable rail.
- △ 2 * FOR GREASE INSTRUCTION SEE PZ 4113.
- △ 3 Strongest compression spring mounted at delivery.
- Max torque 1750 Nm. Max speed 60 rpm.

13	0211 1173 00	2	HEX SOCK SCREW	MC6S M4x16 12.9
12	4230 2952 00	1	CLAMP	-
11	4230 1480 00	1	GREASE	KERNITE Lubra K HS*
10	4230 1828 01	1	COMPRESSION SPRING	29-45N
9	4230 1828 02	1	COMPRESSION SPRING	130-160N
8	0211 1176 00	2	HEX SOCK SCREW	MC6S M4x25 12.9
7	4230 2951 00	1	CABLE RAIL	-
6	4230 2767 00	1	SOCKET HOLDER	1 1/2"
5	4230 1828 00	1	COMPRESSION SPRING	64-80N
4	4230 2777 80	1	FRONT PART	QST95
3	4230 2977 80	1	TRANSDUCER	QST95
2	4230 2770 80	1	GEAR UNIT	QST95 l=98,212
1	4230 3014 80	1	MOTOR	QST80/90

Pos	Designation	Number	Name	Comment
Tolerances, if not indicated, according to:				
AC-STD				
Name QST95-1750CT-T50-L149-H38				Secrecy class -
Material -				1102 K/-
-				CAD Pro/E
Scale 1:3		Format A3	Family -	Compare -
Drawn PLK		Blank -	Replaces -	Drawing owner T00
Cons.class 1295 K/-		Rev 7	Status Released	Designation 8435 6095 10
Transferred from -		Mass/Volume 28.2 kg	Date 2008-05-08	Sheet 1 (2)

7	B6	M10 (2x) added, for Lift Eye Bolts. (Pos B6, page 2)	2019-03-19	HPN
Note	Pos.	Modified from	Date	Intr.



Tolerances, if not indicated, according to:		-	-	-	-	-
AC-STD		-	-	-	-	-
Name QST95-1750CT-T50-L149-H38						Secrecy class
Material -						1102 K/-
-						CAD Pro/E
Atlas Copco		Scale 2:5	Format A3	Family -	Compare -	Drawing owner
		Drawn PLK	Blank -	Replaces -		TOO
Transferred from -	Cons.class 1295 K/-	Rev 7	Status Released	Designation		Sheet 2 (2)
	Mass/Volume 28.2 kg	Date 2008-05-08	8435 6095 10			