

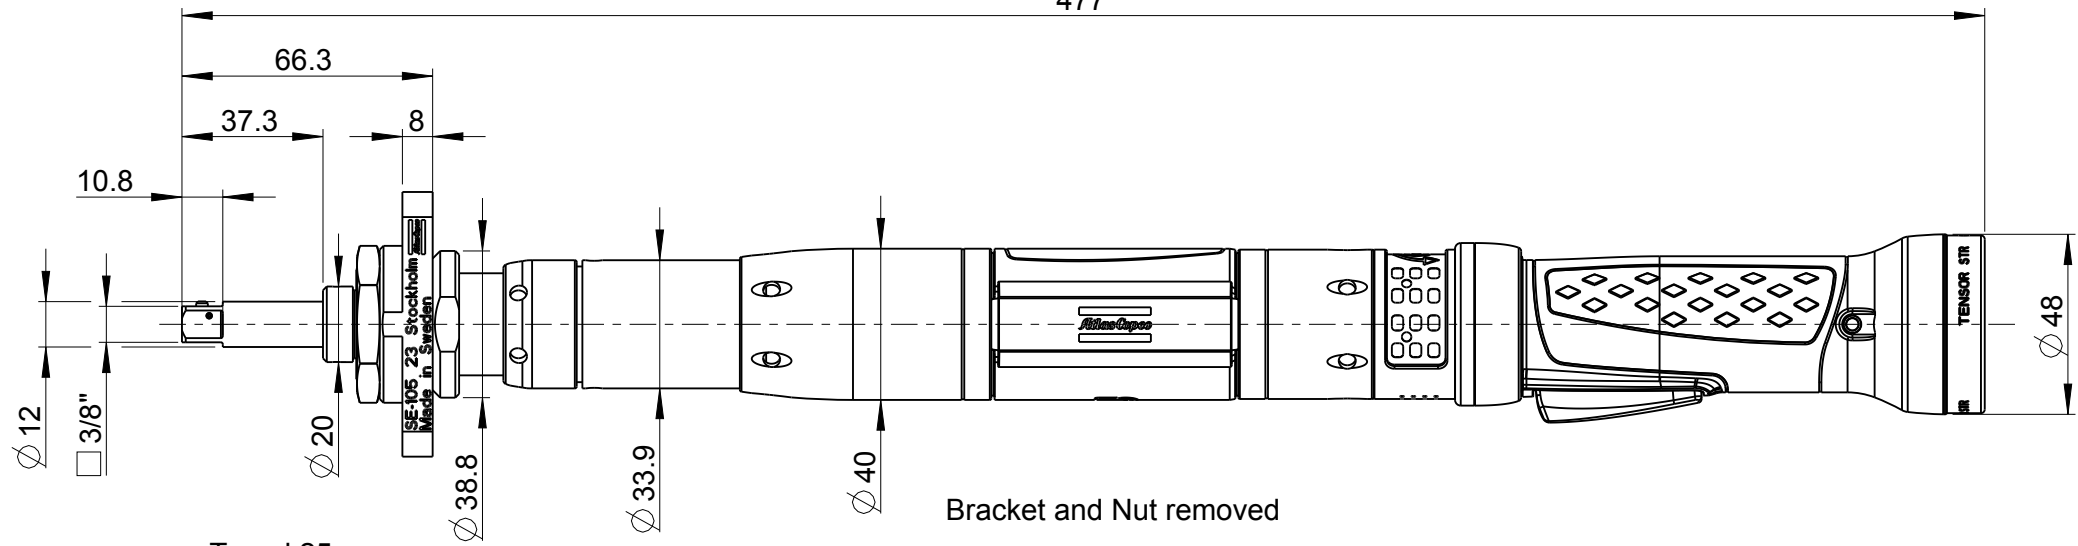


477

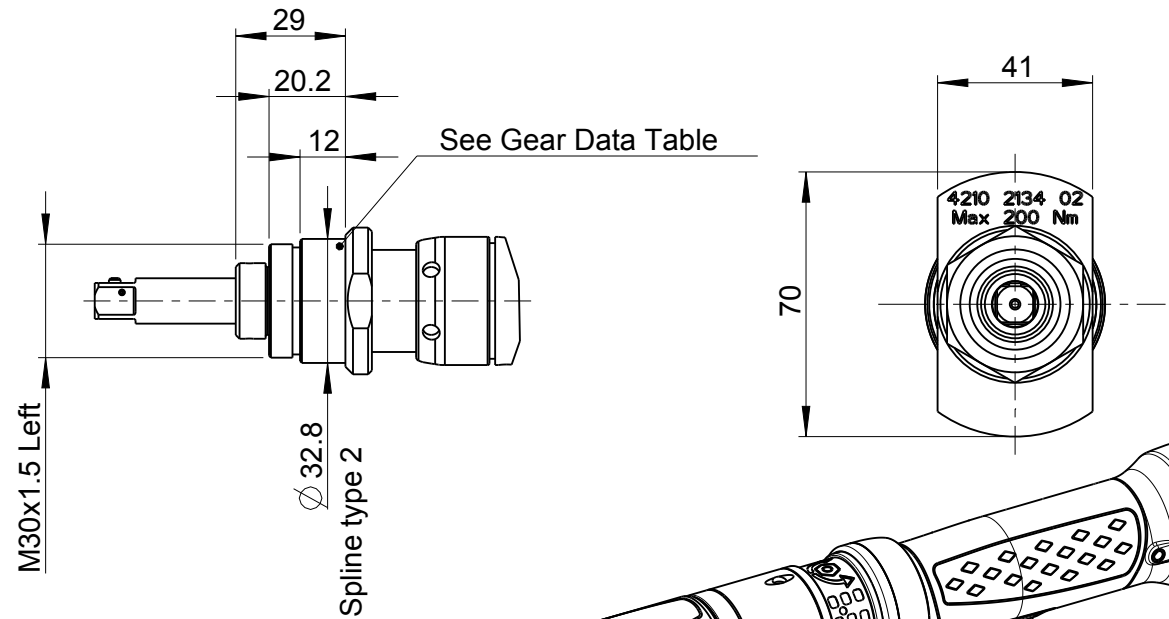


Travel 25



## GEAR DATA/KUGGDATA

|                                   |             |
|-----------------------------------|-------------|
| Class ISO 1328                    | 8           |
| Klass                             | 8           |
| Pressure angle                    | 20°         |
| Pressvinkel                       | 20°         |
| Basic rack                        | AC 4902 K   |
| Referensprofil                    | AC 4902 K   |
| Module                            | 0.8         |
| Normalmodul                       | 0.8         |
| Number of teeth                   | 39          |
| Kuggtal                           | 39          |
| Helix angle                       |             |
| Snedvinkel                        |             |
| Right or left hand teeth          |             |
| Snedriktning                      |             |
| Addendum modification coefficient | 0           |
| Profilförskjutningsfaktor         | 0           |
| Reference diameter                | 31.2        |
| Delningsdiameter                  | 31.2        |
| Chordal tooth thickness           |             |
| Base tangent length over 5 teeth  | 10.95 -0.01 |
| Kordakuggtjocklek                 |             |
| kuggvidd över kuggar              | -0.06       |
| Measurement between/over rollers  |             |
| Mått mellan/över mättrullar       | -           |
| Motg.det.                         |             |

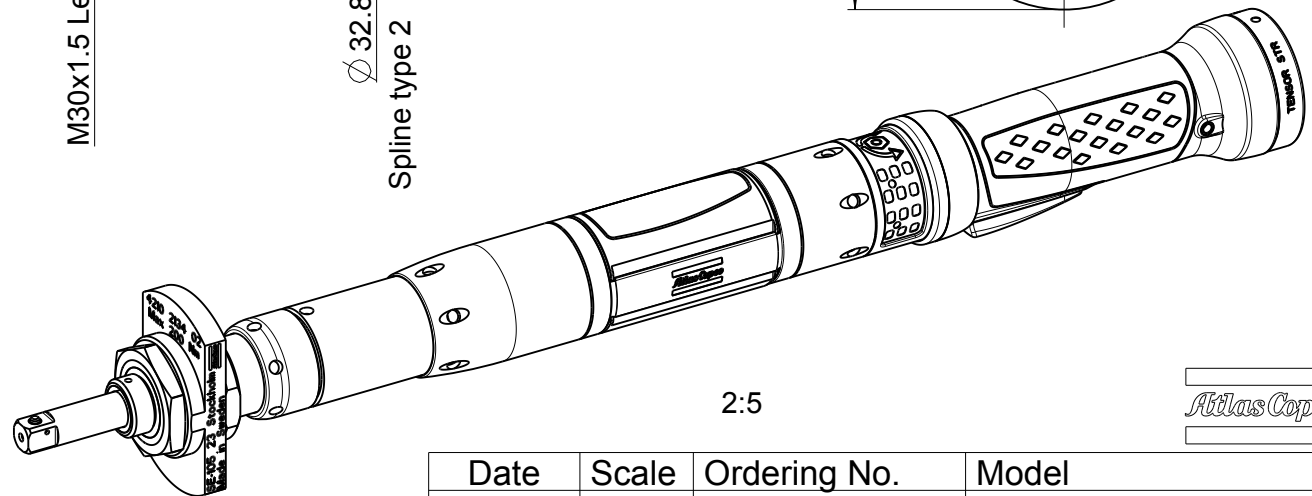

| Date       | Scale | Ordering No. | Model               |
|------------|-------|--------------|---------------------|
| 2018-06-21 | 1:2   | 8436 6260 16 | ETD STR61-15-10-T25 |

Atlas Copco