
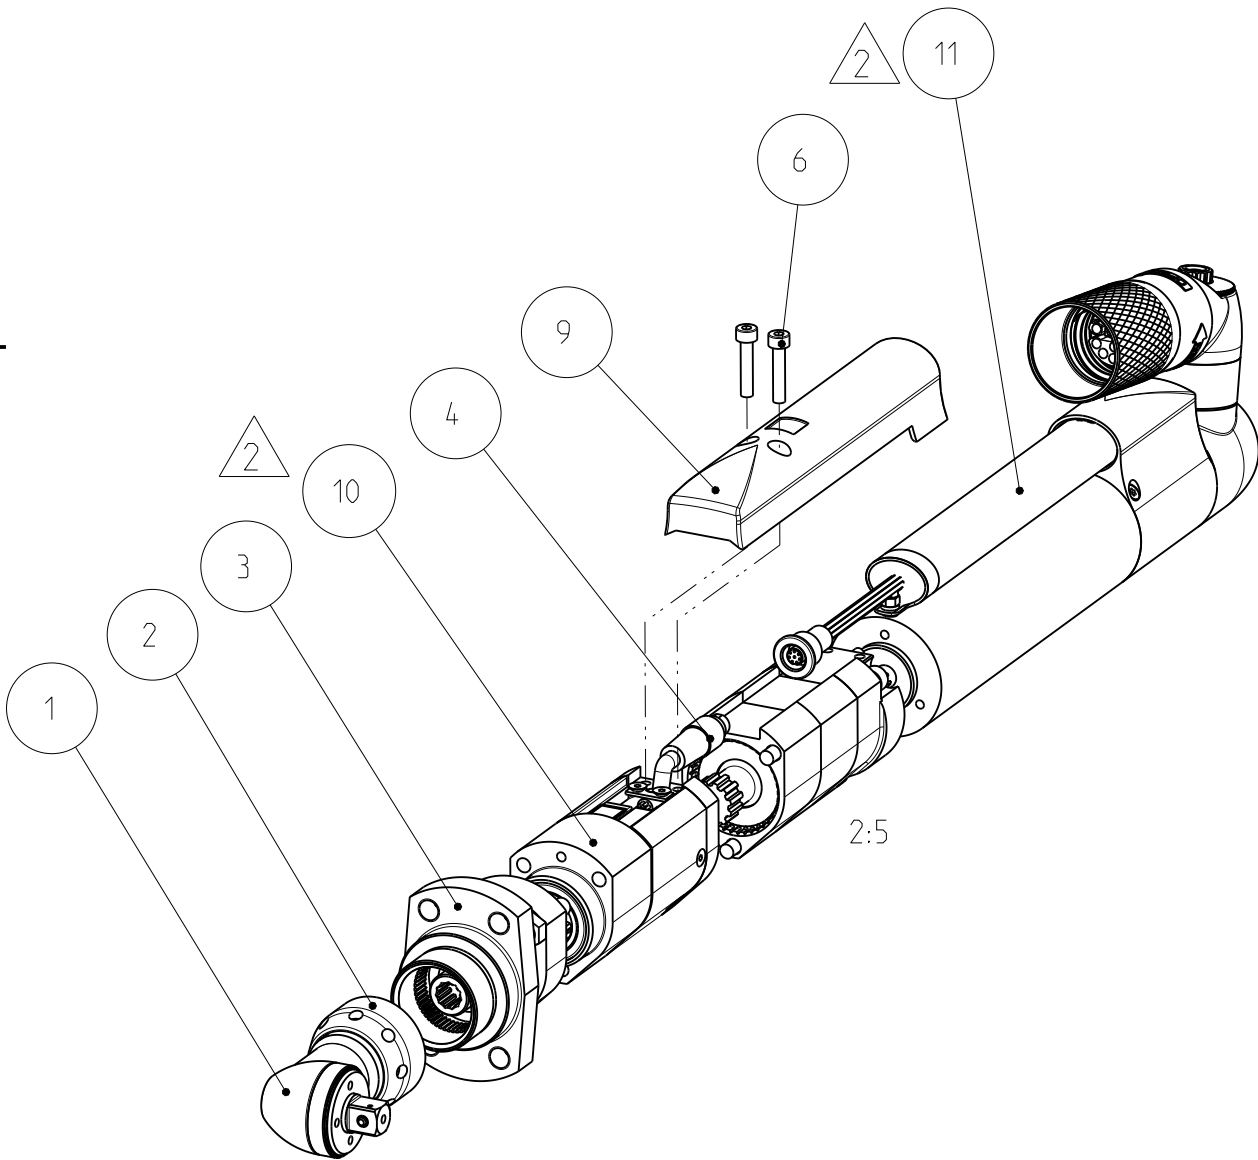
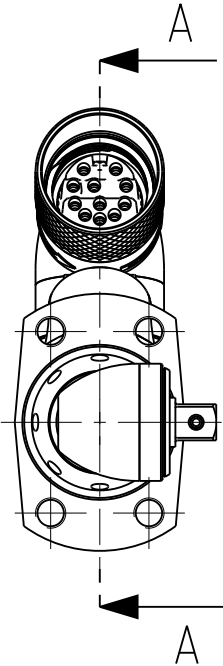


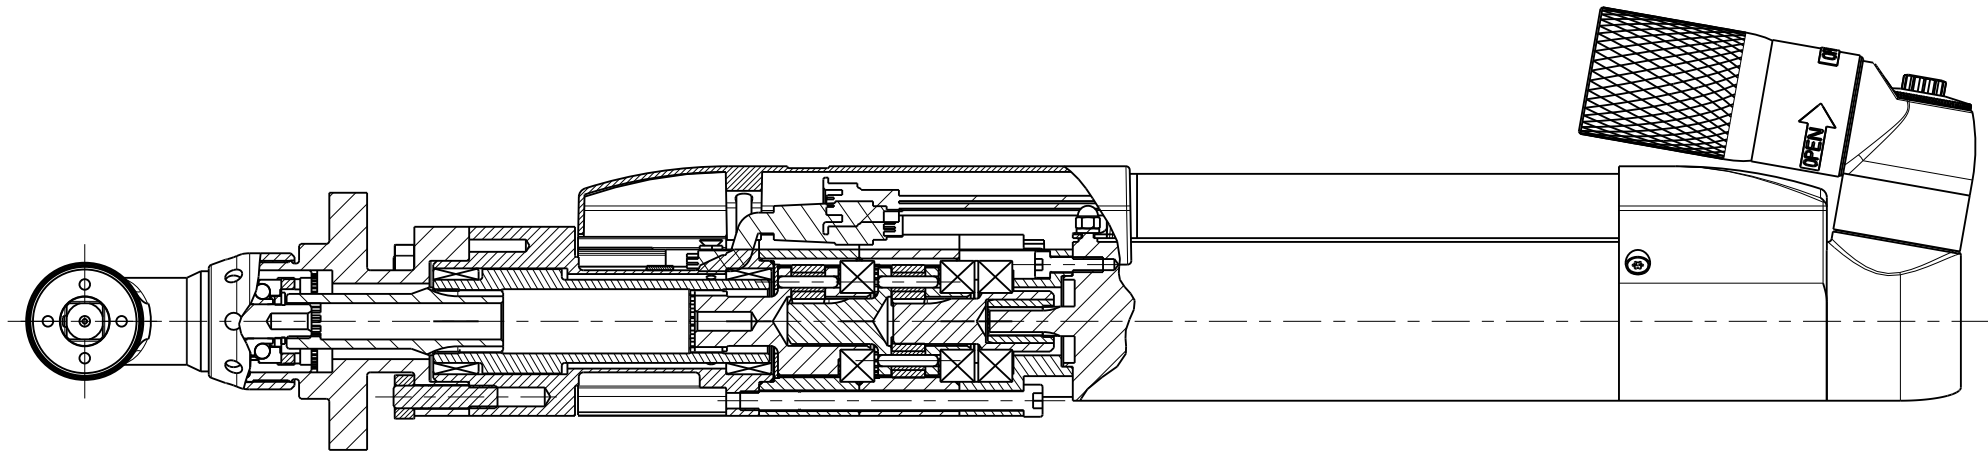

* FOR GREASE INSTRUCTION SEE PZ4113.

SP= Specially designed part, not available as standard spare part.

Comment: Max torque 30Nm. Max speed 605 rpm.

11	4230 3011 80	1	MOTOR	QST 42	
10	4230 2962 80	1	TRANSDUCER SET	QDT38-050	
9	4230 2644 11	1	CABLE RAIL	QST 42-50	
6	0211 1174 00	2	HEX SOCK SCREW	MC6S M4x20 12.9	
5	4230 1480 00	1	GREASE	KERNITE Lubra K HS*	
4	4230 1617 81	1	GEAR UNIT	i = 16.00	
3	4232 1568 80	1	CLAMP	-	SP
2	4220 0841 00	1	CAP NUT	-	
1	4224 2514 04	1	ANGLE GEAR ST6-35	-	
Pos	Designation	Number	Name	Comment	Class

Tolerances, if not indicated, according to:	-	-	-	-	-
AC-STD	-	-	-	-	-

Name					QST42-30C TV-P10		QST		Secrecy class												
Material					-					1102 K/-											
					-					CAD Pro/E											
		Scale		1:2		Format		A3		Family		MK2_G		Compare		-		Drawing owner			
		Drawn		B Nilsson				Blank		-				Replaces		-				TOO	
Transferred from				Cons.class		1295 K/-		Rev		2		Status		Released		Designation		Sheet 1 (2)			
-				Mass/Volume		3,8 kg				Date		2009-01-22		9831		4077		61			

2	-	New connector: Motor & transducer replaced, MK2	2014-09-02	H0n
Note	Pos.	Modified from	Date	Intr.

Tolerances, if not indicated, according to:		-	-	-	-	-
AC-STD		-	-	-	-	-
Name QST42-30CTV-P10					QST	Secrecy class
Material -					1102 K/-	
-					CAD Pro/E	
		Scale 1:2	Format A3	Family MK2_G	Compare -	Drawing owner
		Drawn B Nilsson	Blank -	Replaces -	TOO	
Transferred from -		Cons.class 1295 K/-	Rev 2	Status Released	Designation	Sheet 2 (2)
		Mass/Volume 3,8 kg	Date 2009-01-22	9831 4077 61		