

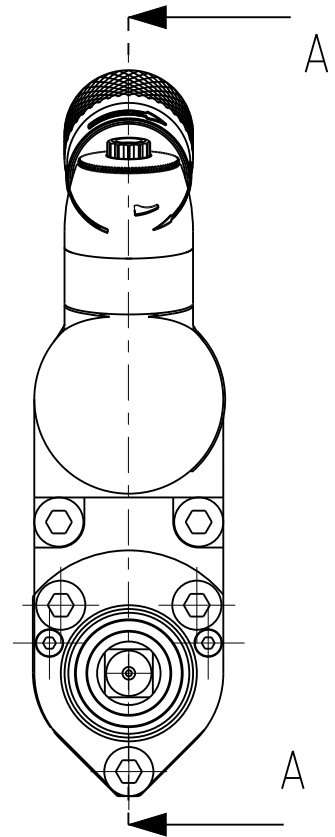


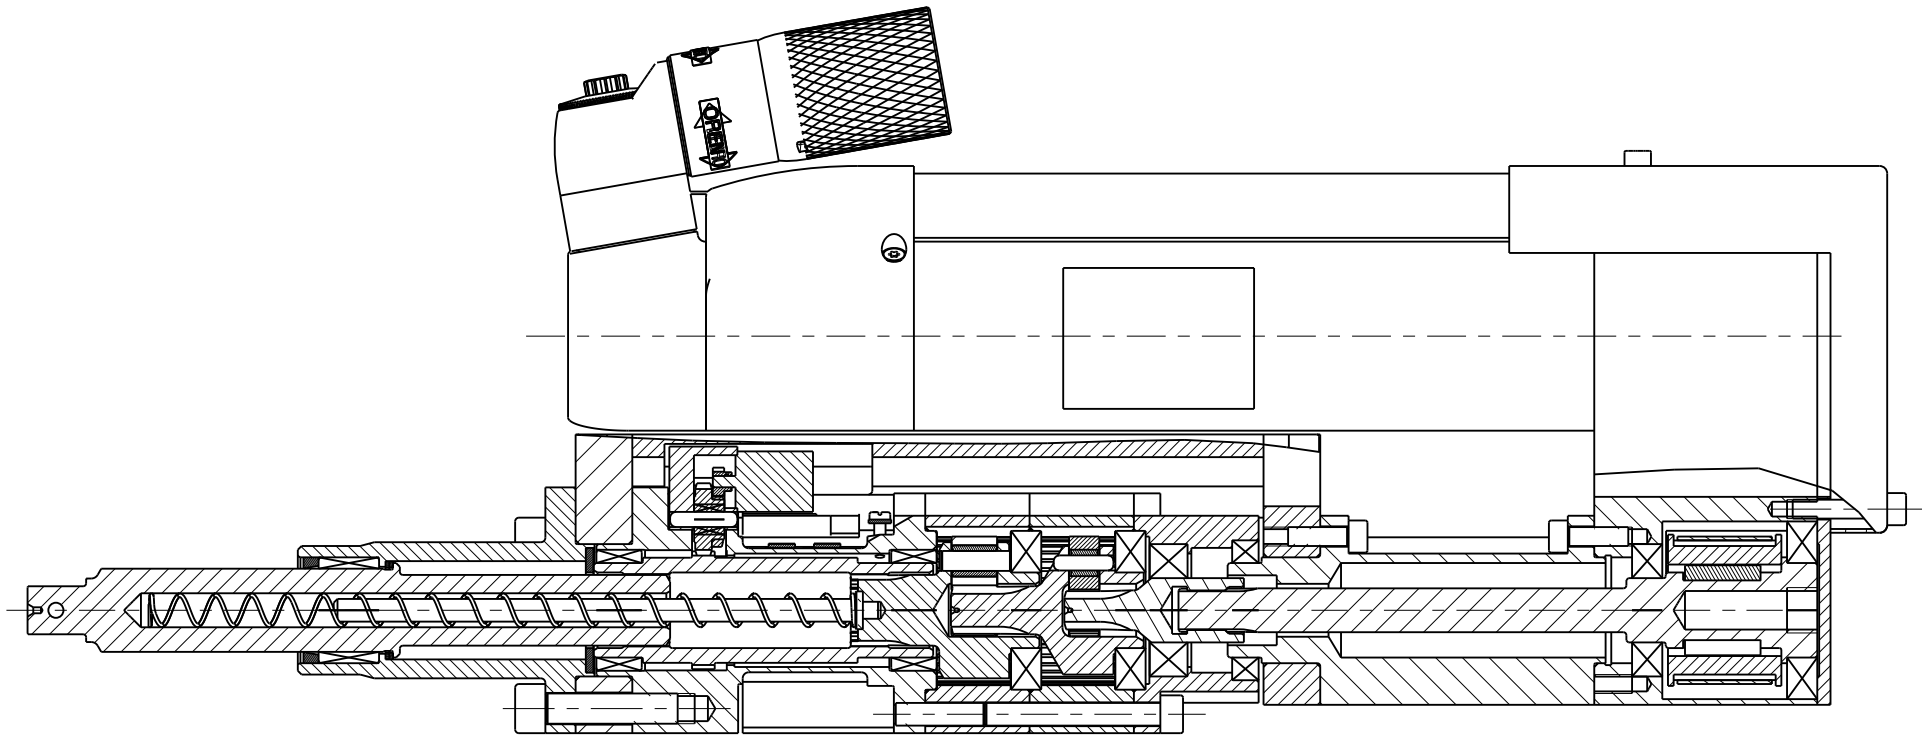

A-A

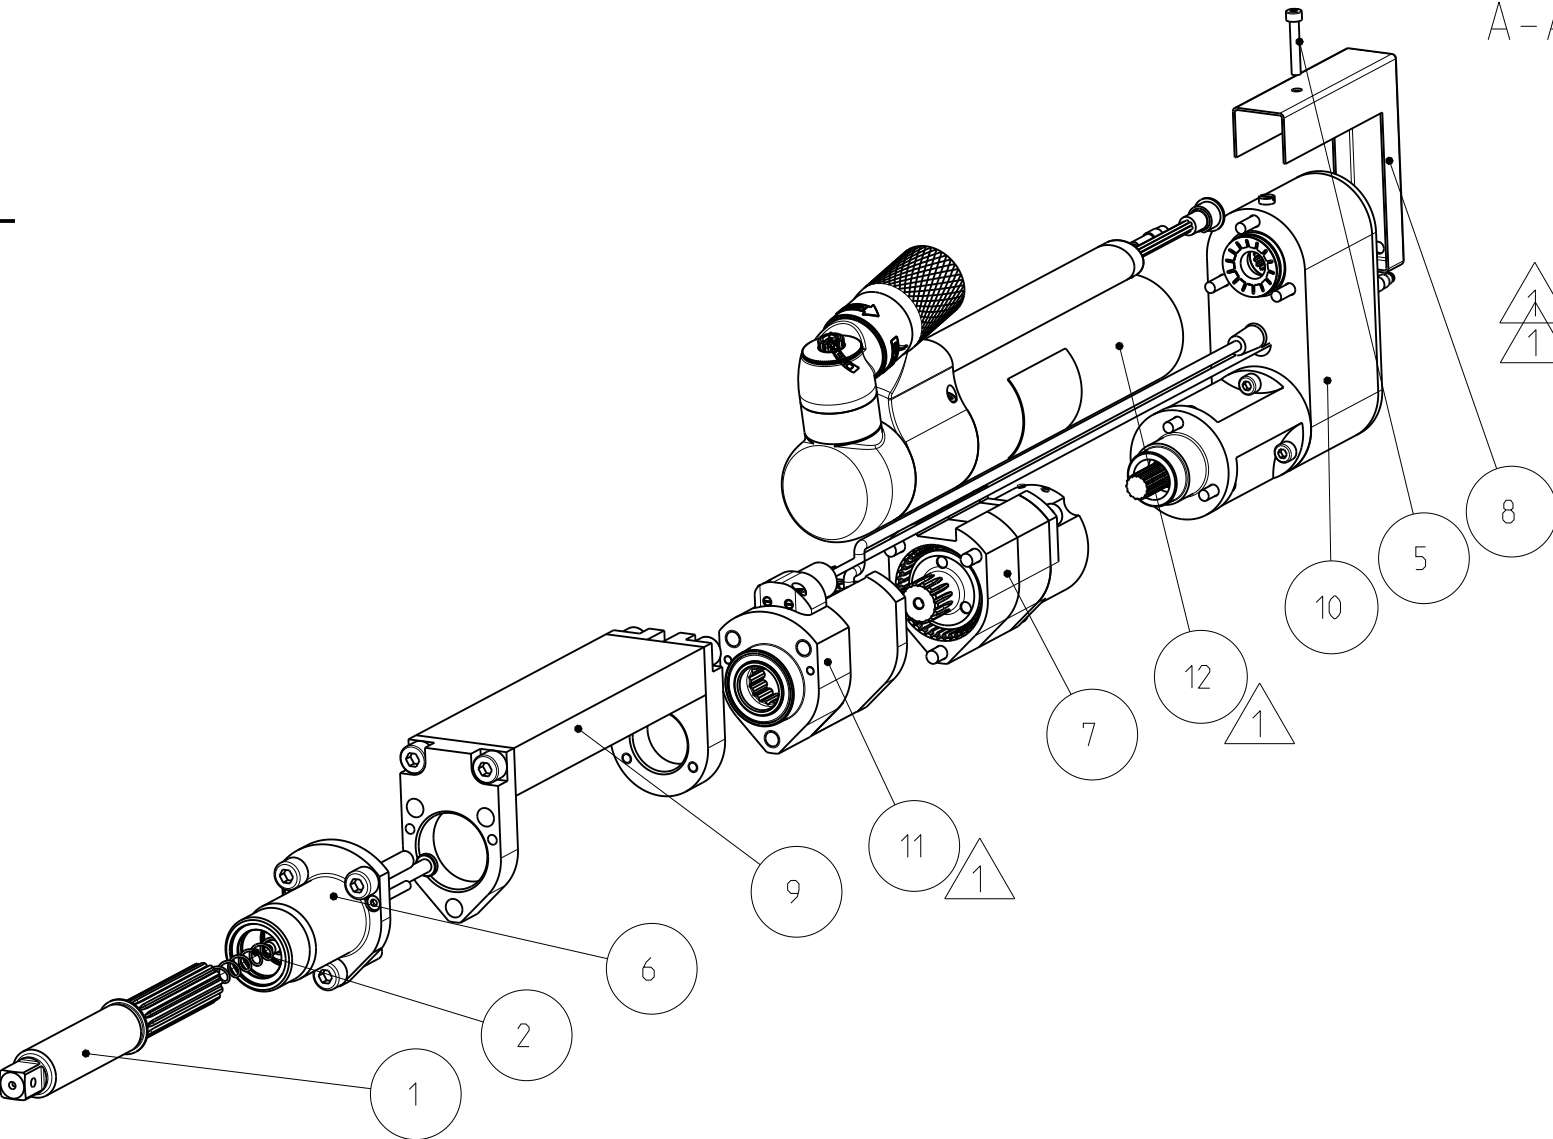

For grease instruction see PZ4113
Strongest compression spring mounted at delivery
SP = Specially designed part. Not available as standard spare part
Max torque 150 Nm. Max speed 380 rpm

12	4230 3012 81	1	MOTOR	QSTTA50	
11	4230 2963 60	1	TRANSDUCER SET	QST50-CTTA	SP
10	4232 3494 80	1	U-GEAR	QST50	SP
9	4232 3605 80	1	CLAMP	QST50	SP
8	4232 3503 00	1	CABLE RAIL	QST50	SP
7	4232 3501 80	1	GEAR UNIT	QMX50: $i=((41/8)+1) \times ((41/10)+1)=31.24$	SP
6	4232 1374 80	1	FRONT PART	QMX50	SP
5	0211 1176 00	1	HEX SOCK SCREW	MC6S M4x25 12.9	
4	4230 1480 00	1	GREASE	KERNITE Lubra K HS*	
3	4230 1826 00	1	COMPRESSION SPRING	38-55N	
2	4230 1825 02	1	COMPRESSION SPRING	20-30N	
1	4230 1820 00	1	SOCKET HOLDER	1/2'' ±0mm 50mm travel WM5 thru hole	
Pos	Designation	Number	Name	Comment	Class



Tolerances, if not indicated, according to:	-	-	-	-	-
AC-STD	-	-	-	-	-

Name	QST50-150CUTTA-T50-L137-H13				Secrecy class
Material	-				1102 K/-
	-				CAD Pro/E
Scale	1:2	Format	A3	Family	MK2
Drawn	toohon		Blank	Compare	-
Transferred from	Cons.class	1295 K/-	Rev	1	Status
	Mass/Volume	-	Date	2008-04-20	Released
Designation					9831 4078 60
Sheet 1 (2)					
Drawing owner					T00

1	-	Motor and transducer replaced. New connector. MK2.	2017-12-27	BNn
Note	Pos.	Modified from	Date	Intr.

[illegible]

1	-	Motor and transducer replaced. New connector. MK2.	2017-12-27	BNn
Note	Pos.	Modified from	Date	Intr.

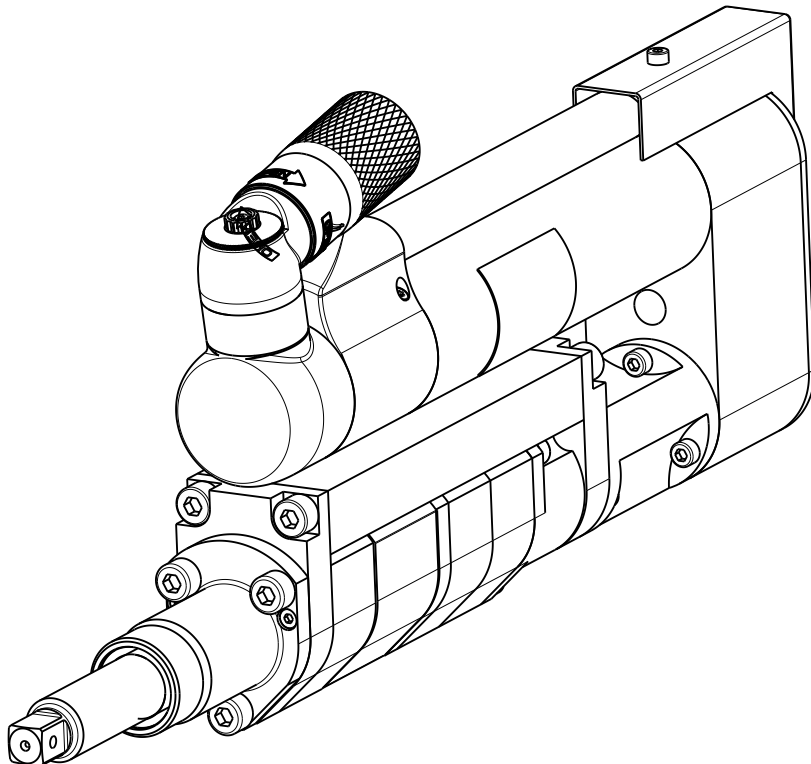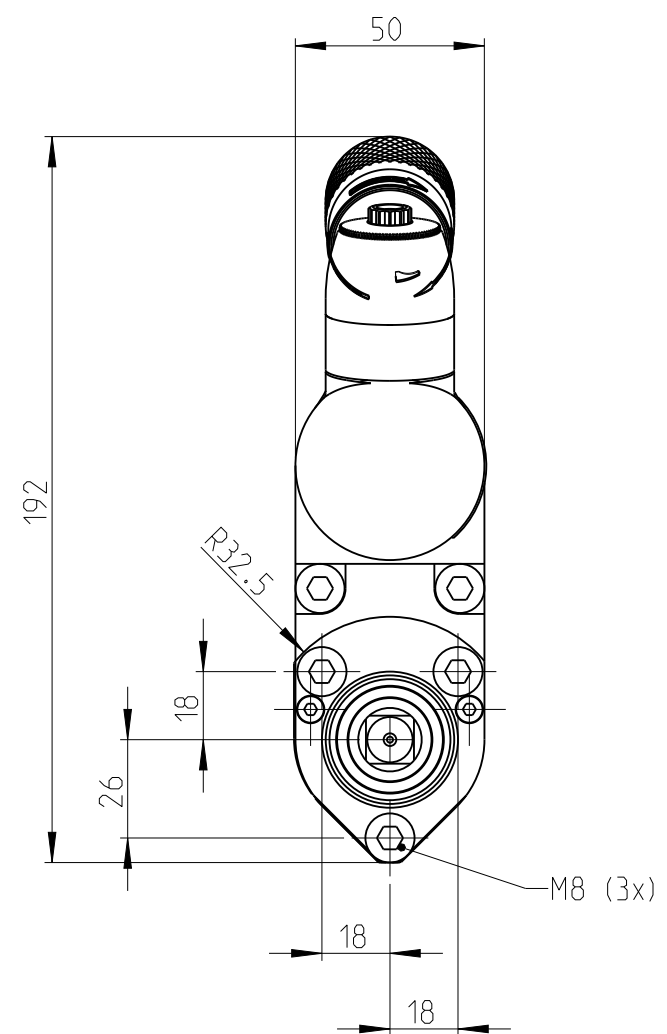

Tolerances, if not indicated, according to:		-	-	-	-	-
AC-STD		-	-	-	-	-
Name QST50-150CUTTA-T50-L137-H13					Secrecy class	
Material -					1102 K/-	
-					CAD Pro/E	
Atlas Copco	Scale 1:2	Format A3	Family MK2	Compare -	Drawing owner	
	Drawn toohon		Blank -	Replaces -	TOO	
Transferred from -	Cons.class 1295 K/-	Rev 1	Status Released	Designation	Sheet 2 (2)	
	Mass/Volume -		Date 2008-04-20	9831 4078 60		