
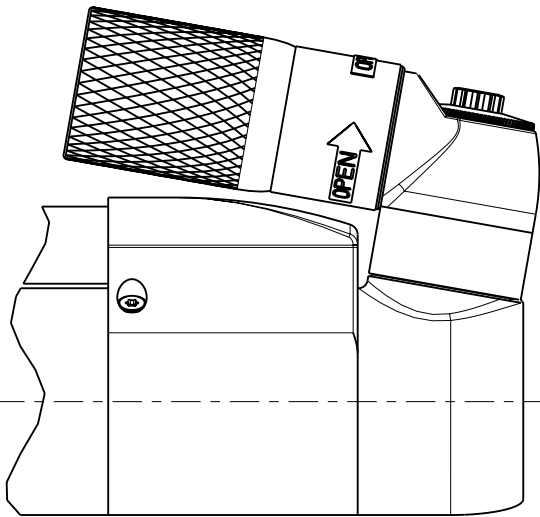
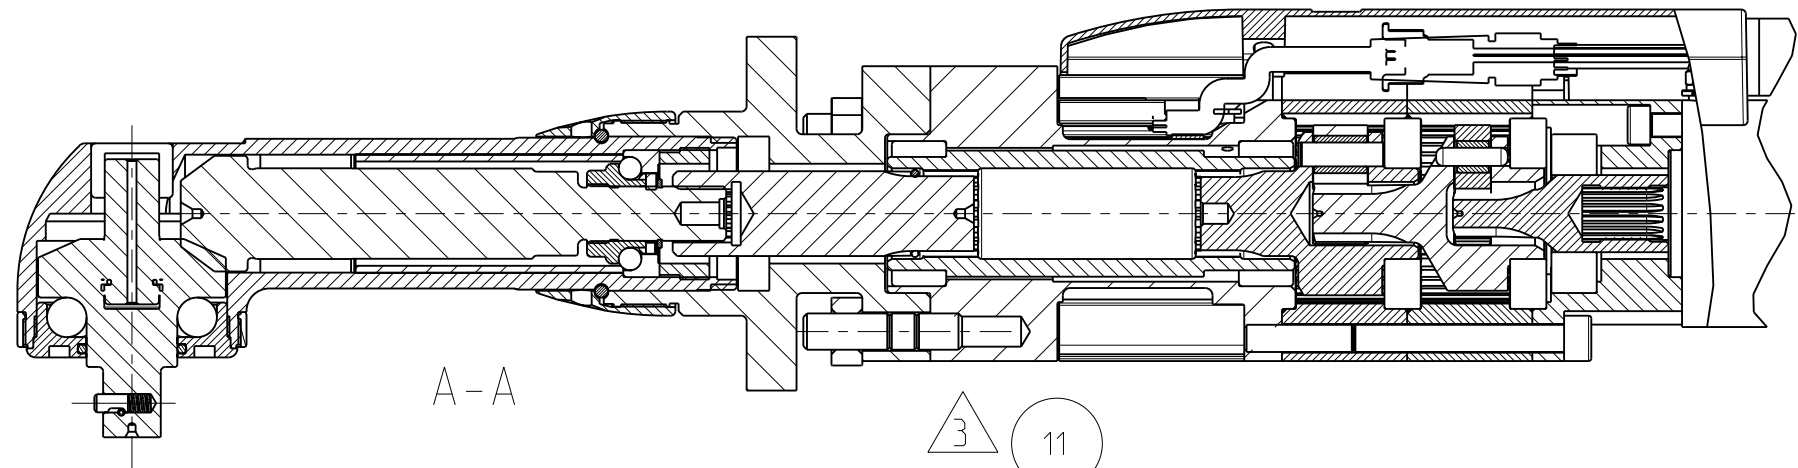


Spare part:
4220 3599 90

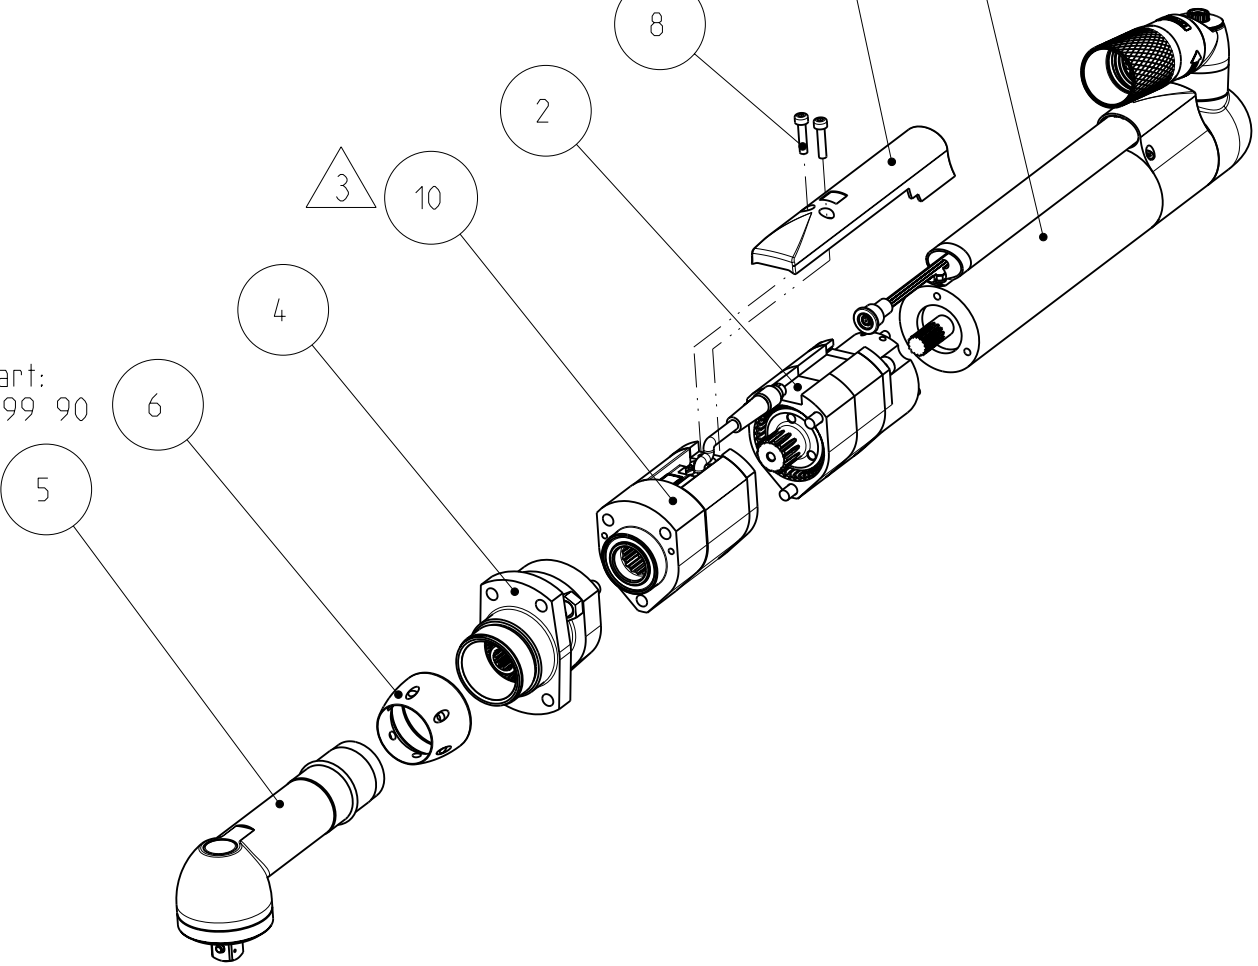

FOR GREASE INSTRUCTION SEE PZ4113

Comment: Max torque 170 Nm. Max speed 200 rpm.

11	4230 3012 80	1	MOTOR	QST 50
10	4230 2963 80	1	TRANSDUCER SET	QDT50-100
9	4230 1480 00	1	GREASE	KERNITE Lubra K HS*
8	0211 1965 27	2	HEX SOCK SCREW	MC6S M4x18 H 12.9
7	4230 2645 10	1	CABLE RAIL	QST 50
6	4220 2928 00	1	CAP NUT ST6/ST8-100/150/200	-
5	4224 2509 02	1	ANGLE GEAR ETV-ST6/ST8-150/200	u = 1.8
4	4230 2350 80	1	ADAPTER	-
2	4230 2171 81	1	GEAR UNIT	ETX50 "50": i=((41/8)+1)*((41/10)+1))~31.24
Pos	Designation	Number	Name	Comment


Tolerances, if not indicated, according to:	-	-	-	-	-
AC-STD	-	-	-	-	-

Name QST50-170CTV-P13					QST	Secrecy class		
Material -					1102 K/-			
-					CAD Pro/E			
 <i>Atlas Copco</i> 		Scale 3:5	Format A3	Family MK2_G	Compare -	Drawing owner T00		
Drawn KKM			Blank -	Replaces -				
Transferred from -	Cons.class 1295 K/-		Rev 3	Status RELEASED	Designation		Sheet 1 (2)	
	Mass/Volume 6.8 kg		Date 2008-02-18	9831 4078 38				

3	-	New connector:Motor & Transducer replaced = MK2	2013-02-05	H0n
Note	Pos.	Modified from	Date	Intr.

Model name	9831407838	Rev.Ver	3.1
Drawing name	9831407838	Rev.Ver	3.1

This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.

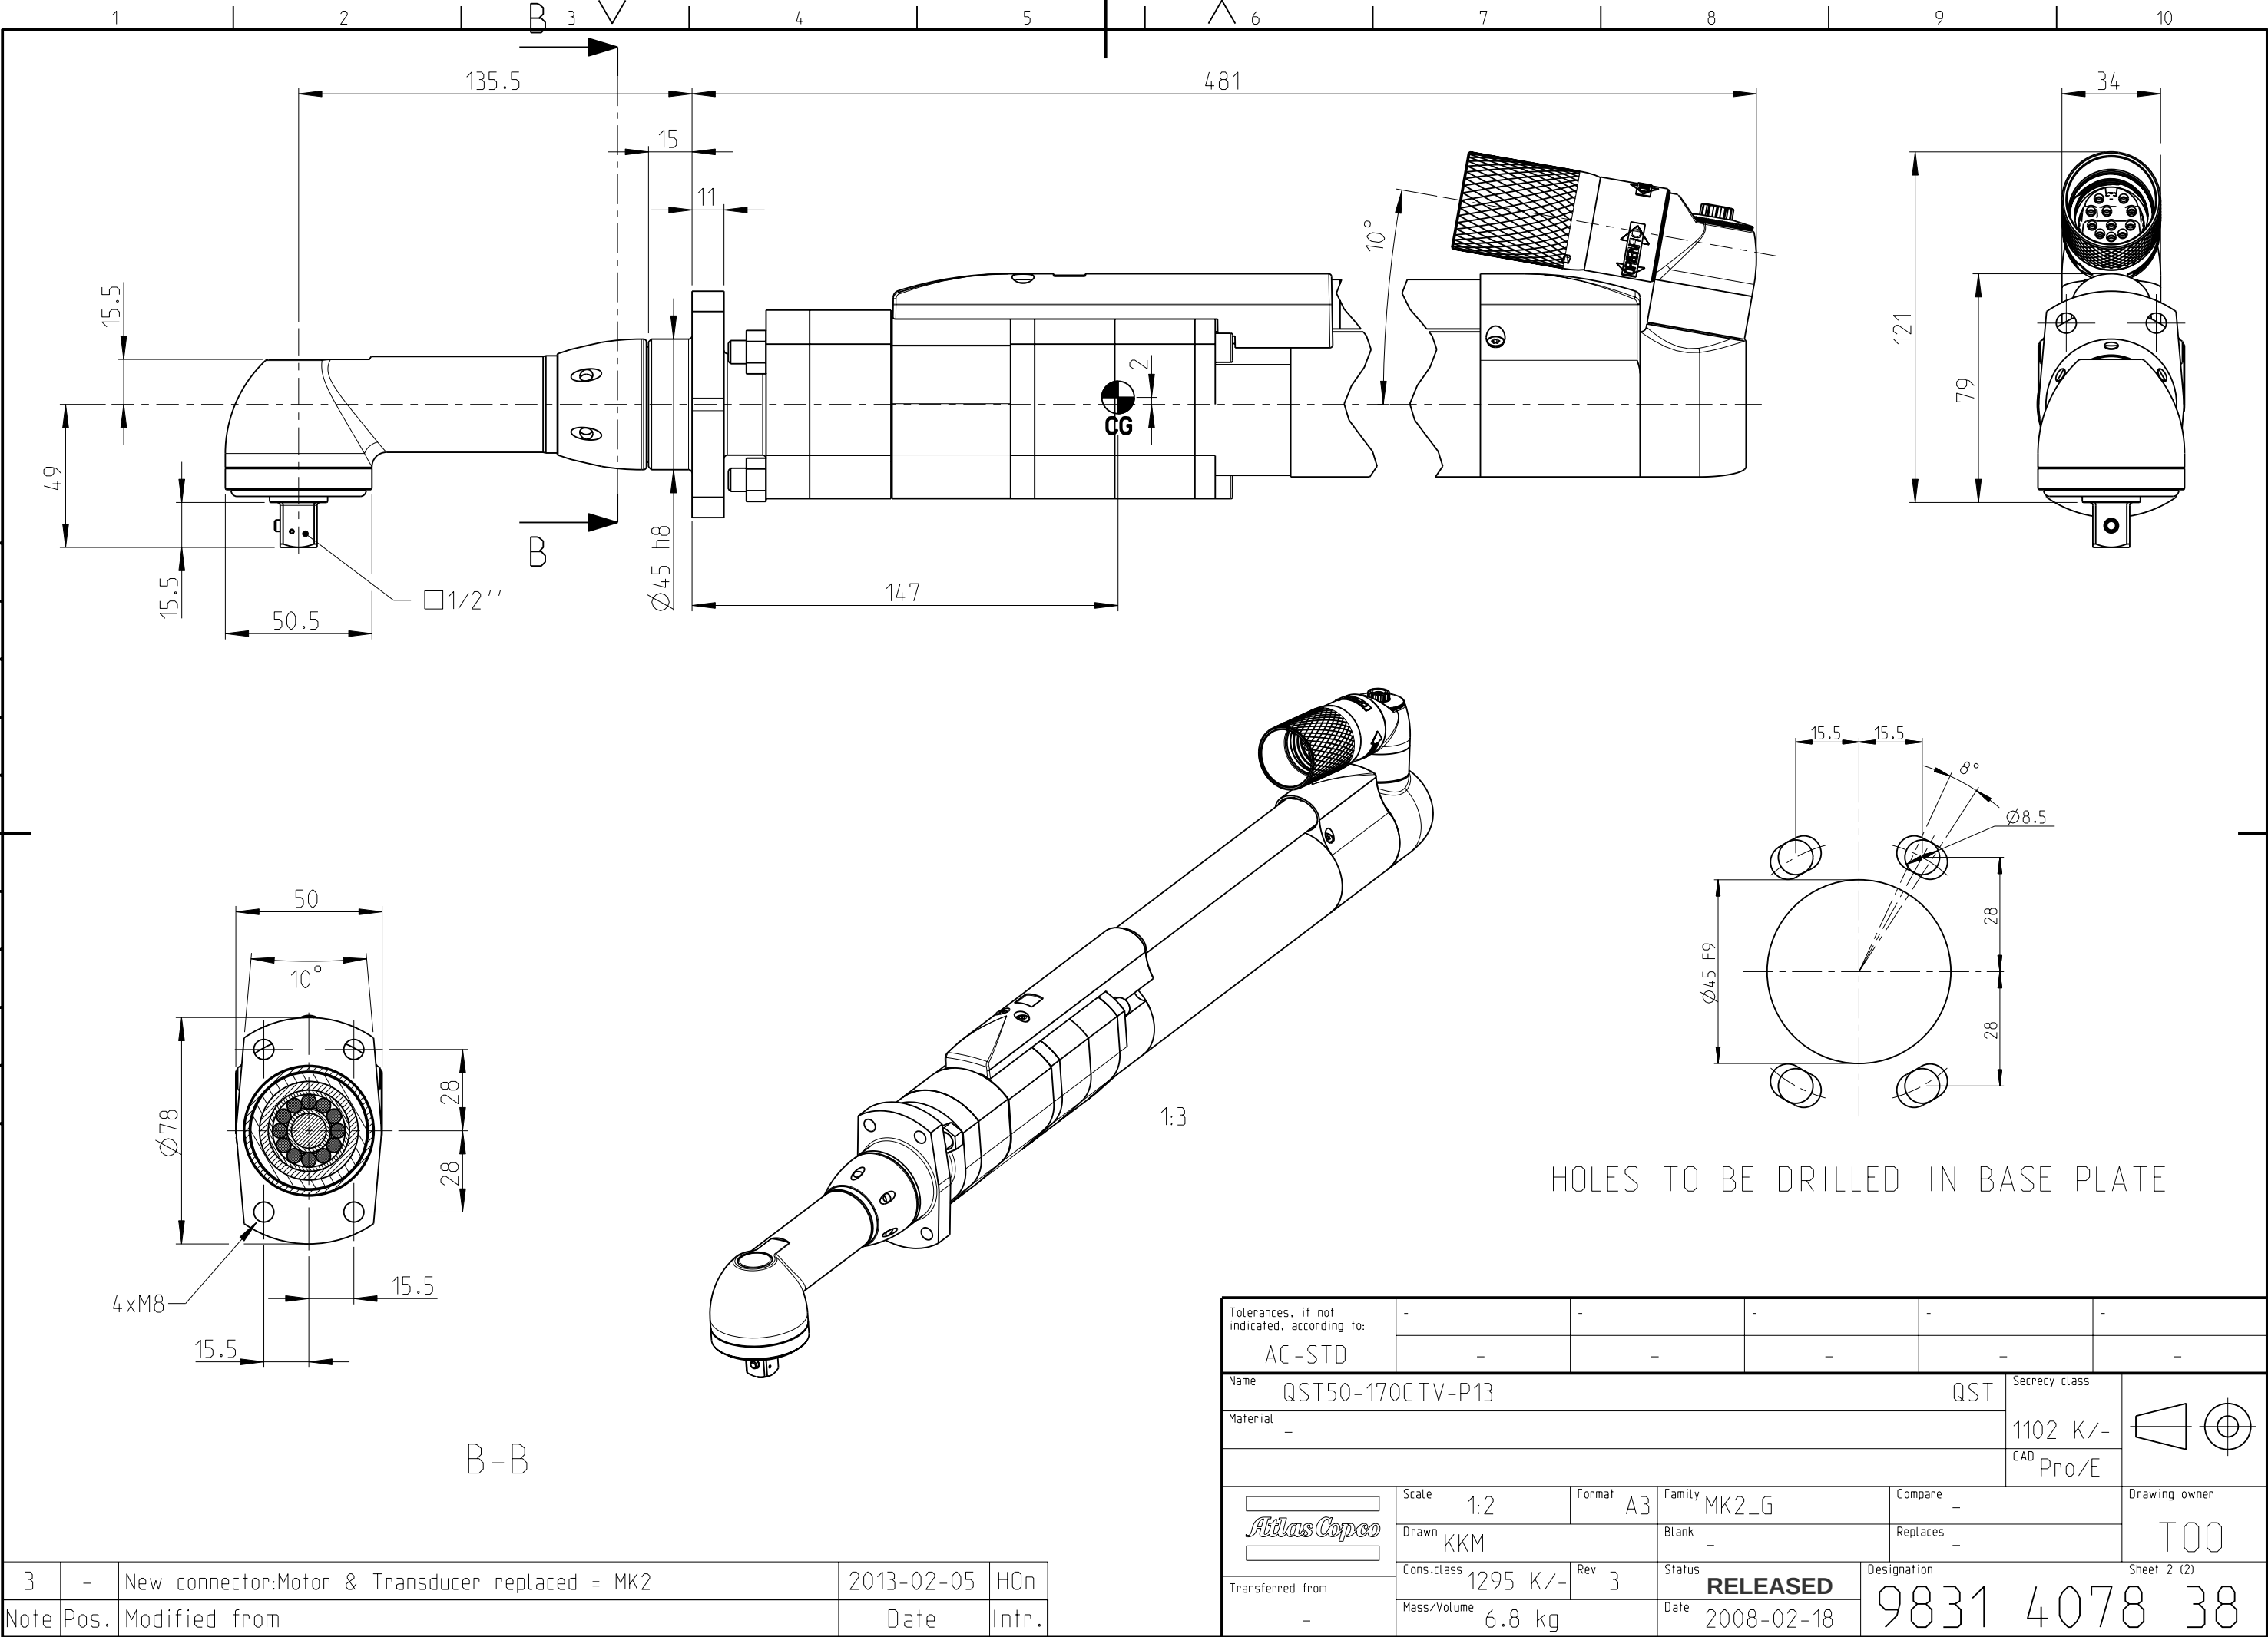

3	-	New connector:Motor & Transducer replaced = MK2	2013-02-05	H0n
Note	Pos.	Modified from	Date	Intr.

Tolerances, if not indicated, according to:		-	-	-	-	-
AC-STD		-	-	-	-	-
Name QST50-170CTV-P13					QST	Secrecy class
Material -					1102 K/-	
-					CAD Pro/E	
	Scale	1:2	Format	A3	Family	MK2_G
	Drawn	KKM	Blank	-	Compare	-
	Cons.class	1295 K/-	Rev	3	Replaces	-
Transferred from		Mass/Volume	6.8 kg	Status	RELEASED	Designation
-				Date	2008-02-18	9831 4078 38
Sheet 2 (2)						Drawing owner
						T00