


COMPRESSOR DATA SHEET

Federal Uniform Test Method for Certain Air Compressors Not Applicable

Rotary Compressor: Variable Frequency Drive

MODEL DATA - FOR COMPRESSED AIR

1	Manufacturer: Atlas Copco		
2	Model Number: ZT 22 VSD STD-8.6 HAV	Date: 07-30-2024	
	<input checked="" type="checkbox"/> Air-cooled <input type="checkbox"/> Water-cooled	Type: Tooth	
	<input type="checkbox"/> Lubricated <input checked="" type="checkbox"/> Oil-free	# of Stages: 2	
3	Full Load Operating Pressure*(b)	124.7	psig*(b)
4	Drive Motor Nominal Rating	29.5	hp
5	Drive Motor Nominal Efficiency	92.7	percent
6	Fan Motor Nominal Rating (if applicable)	1.3	hp
7	Fan Motor Nominal Efficiency	85.6	percent
8*	Input Power (kW)	Capacity (acfm) *(a,d)	Specific Power (kW/100 acfm)*(d)
	28.5 Max	114.0	25.0
	24.6	97.7	25.1
	20.4	81.4	25.0
	16.7	65.2	25.6
	13.8 Min	48.9	28.2
9*	Total Package Input Power at Zero Flow*(c,d)	4.5	kW

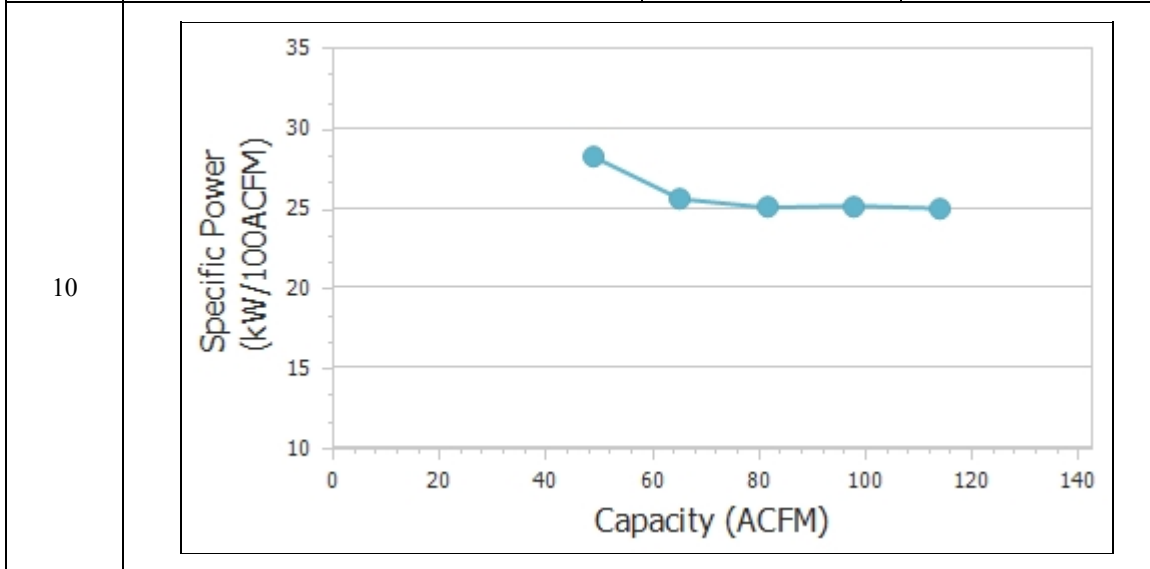

*For models that are tested in the CAGI Performance Verification Program, these items are verified by program administrator

Consult CAGI website for a list of participants in the third party verification program:

www.cagi.org

Notes:

- Measured at the discharge terminal point of the compressor package in accordance with ISO 1217, Annex E; acfm is actual cubic feet per minute at inlet conditions.
- The operating pressure at which the Capacity and Electrical Consumption were measured for this data sheet.
- No Load Power. In accordance with ISO 1217, Annex E, if measurement of no load power equals less than 1%, manufacturer may state "not significant" or "0" on the test report.
- Tolerance is specified in ISO 1217, Annex E, as shown in table below:
NOTE: The terms "power" and "energy" are synonymous for purposes of this document.

Member



Volume Flow Rate at specified conditions		Volume Flow Rate	Specific Energy Consumption	No Load / Zero Flow Power +/- 10
m ³ / min	ft ³ / min	%	%	
Below 0.5	Below 15	+/- 7	+/- 8	
0.5 to 1.5	15 to 50	+/- 6	+/- 7	
1.5 to 15	50 to 500	+/- 5	+/- 6	
Above 15	Above 500	+/- 4	+/- 5	